




CUSTOMER DRAWING

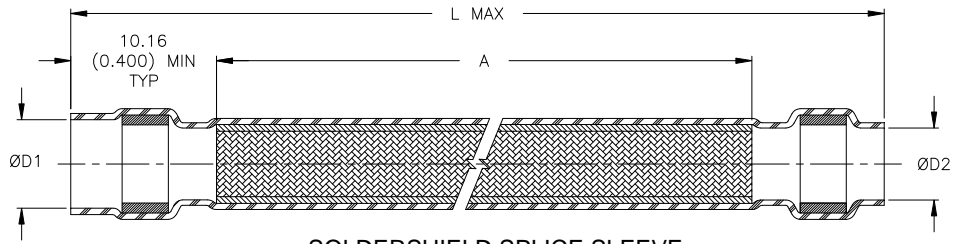

SOLDERSHIELD SPLICE SLEEVE



CRIMP SPLICE

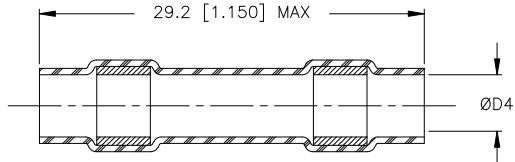

SEALING SLEEVE

Part Names	Primary No.	AWG Range	Color Code	Product Dimensions					
				L Max	A±2.54 (0.100)	ØD1	ØD2	ØD3	ØD4
D-200-0228	1	26-20	Red	80.52 (3.170)	50.30 (1.970)	4.29 (0.169)	3.00 (0.118)	1.14 (0.045)	2.79 (0.110)
D-200-0229	1	20-16	Blue	80.52 (3.170)	50.30 (1.970)	5.50 (0.217)	4.00 (0.157)	1.63 (0.064)	4.00 (0.157)
D-200-0230	1	16-12	Yellow	80.52 (3.170)	50.30 (1.970)	6.50 (0.256)	5.00 (0.197)	2.46 (0.097)	4.32 (0.170)
D-200-0231	2	26-20	Red	105.92 (4.170)	74.93 (2.950)	5.50 (0.217)	4.00 (0.157)	1.14 (0.045)	2.16 (0.085)
D-200-0232	2	18-16	Blue	105.92 (4.170)	74.93 (2.950)	6.50 (0.256)	5.00 (0.197)	1.63 (0.064)	2.79 (0.110)
D-200-0233	2	14	Yellow	105.92 (4.170)	74.93 (2.950)	7.50 (0.295)	6.00 (0.236)	2.46 (0.097)	4.32 (0.170)
D-200-0234	2	12	Yellow	105.92 (4.170)	74.93 (2.950)	10.50 (0.413)	9.04 (0.356)	2.46 (0.097)	4.32 (0.170)
D-200-0236	3/4	22-20	Red	105.92 (4.170)	74.93 (2.950)	6.50 (0.256)	5.00 (0.197)	1.14 (0.045)	2.16 (0.085)
D-200-0237	3/4	18-16	Blue	105.92 (4.170)	74.93 (2.950)	7.50 (0.295)	6.00 (0.236)	1.63 (0.064)	2.79 (0.110)
D-200-0238	3/4	14-12	Yellow	108.00 (4.250)	74.93 (2.950)	10.50 (0.413)	9.04 (0.356)	2.46 (0.097)	4.32 (0.170)
D-200-0239	3/4	18-16	Blue	108.00 (4.250)	74.93 (2.950)	10.50 (0.413)	9.04 (0.356)	1.63 (0.064)	4.32 (0.170)

MATERIALS

- SOLDERSHIELD SPLICE SLEEVE:** Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer, containing two environment resistant sealing rings and a solder impregnated, flux-coated copper-wire braid. Transparent blue.
SOLDER: TYPE Sn96 per ANSI J-STD-006.
FLUX: TYPE ROM1 per ANSI J-STD-004.
- CRIMP SPLICE (1, 2, OR 4 PER KIT):** Nickel-plated copper alloy.
- SEALING SPLICE SLEEVE (1, 2, OR 4 PER KIT):** Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer, containing two environment resistant sealing rings. Transparent blue.

APPLICATION

- These kits are designed to make an environment-resistant, 1 to 1 in-line splice in shielded single, twisted pair, trio and quad cables having nickel-plated conductors and insulations rated for 150°C minimum.
- Temperature rating: -55°C to +200°C.
- For installation procedures refer to the applicable sections of Raychem Process Standard RCPS 150-05.

		300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: 1 TO 1 SPLICES CRIMP, SOLDERSHIELD SPLICE KIT, SHIELDED CABLE 26 THRU 12 AWG, Ni PLATED, 1 TO 4 CONDUCTORS	
		Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: F	DATE: June 21, 2010
PREPARED BY: UNGUYEN	CAGE CODE: 06090	ECO NUMBER: ECO-10-014788		SCALE: NTS	SIZE: A SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#) [620026-000](#)