


CUSTOMER DRAWING

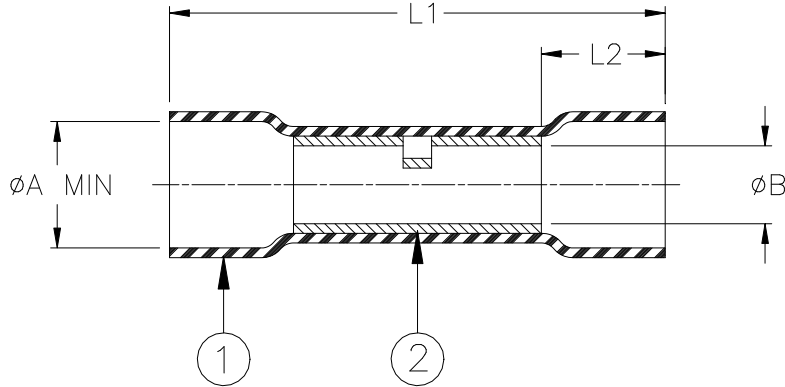

Product Name	Color	Marking	Size Range mm ² (AWG)	L1 ±1.50 [±0.06]	L2 min	øA*		øB min	Wire Strip Length Nom.
						(a) min	(b) max		
D-406-0034	Yellow	DURASEAL [®] 24-26	0.15 - 0.25 (26 - 24)	31.5 [1.24]	5.0 [0.20]	3.00 [0.118]	1.40 [0.055]	1.09 [0.043]	6 to 8 (1/4 to 5/16)
D-406-0001	Red	DURASEAL [®] 18-22	0.5 - 1.0 (22 - 18)	31.5 [1.24]	5.0 [0.20]	3.70 [0.146]	1.40 [0.055]	1.47 [0.058]	6 to 10 (1/4 to 3/8)
D-406-0002	Blue	DURASEAL [®] 14-16	1.5 - 2.5 (16 - 14)	31.5 [1.24]	5.0 [0.20]	4.60 [0.181]	2.00 [0.080]	2.33 [0.092]	6 to 10 (1/4 to 3/8)
D-406-0003	Yellow	DURASEAL [®] 10-12	3.0 - 6.0 (12 - 10)	37.5 [1.48]	10.0 [0.39]	6.50 [0.255]	2.80 [0.110]	3.50 [0.138]	10 to 13 (3/8 to 1/2)

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyamide (Nylon) with a polyamide-based hot-melt adhesive liner. See above table for applicable sleeve color.
- CRIMP SPLICE: Tin-plated copper alloy.
BASE METAL: Copper alloy C11000 per ASTM B152.
PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

- These parts may be used to obtain an environment-resistant one-to-one in-line (butt) splice in wires meeting the size range and diameter restraints specified herein and having a temperature rating of not less than 85°C.
- * øA: (a) Minimum diameter as received: Wire insulation diameter must be less than this value.
(b) Maximum diameter after recovery: Wire insulation diameter must be larger than this value to obtain an environment resistant splice.
- Wires are to be stripped per table, inserted into opposite ends of the crimp barrel, crimped with a TE Connectivity AD-1522 (22-10 AWG) or equivalent. For D-406-0034, Pro-Crimper III with die set 1976357-1 (24-26 AWG) or equivalent may be used. The sleeve must be heated along its entire length until the crimp marks are gone and the ends of the sleeve recover onto the wires.
- Spliced assemblies will meet the requirements of TE Connectivity / Raychem specification RB-107.
- Except for D-406-0034, all of the parts covered by this drawing are UL Listed (US and CANADA), File #E87681.

		Raychem Devices	TITLE: DURASEAL CRIMP SPLICE ENVIRONMENT RESISTANT			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are shown in [brackets].			DOCUMENT NO.: D-406-00XX			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV.: C3	REV DATE: 13-Dec-2018	
DRAWN BY: P. TALLY	CAGE CODE: 06090	DRAWN DATE: 1/28/2008	ECO No.: ECO-18-019635	SCALE: NTS	SIZE: A	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [63-S](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#)