


- (1) BUS TERMINATOR MODULE, SEALED, STRAIN RELIEVED, BLACK.
- (2) RAYCHEM BUS CABLE, WHITE JACKET.

DESCRIPTION	BUS CABLE	CABLE DESCRIPTION
D-500-0463-612	10612-24-9	SINGLE SHIELD, OPTIMIZED BRAID
D-500-0463-613	10613-24-9	DOUBLE SHEILD, OPTIMIZED BRAID
D-500-0463-614	10614-24-9	EMP HARDENED

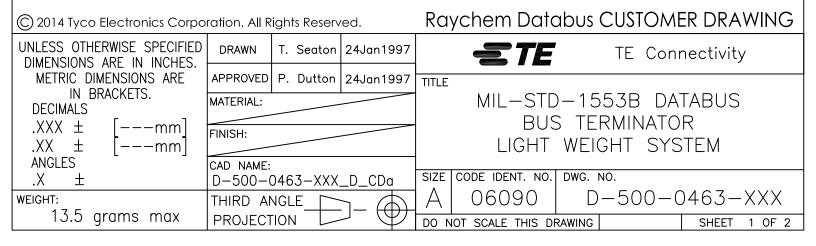

NOTES:

- 1.0 MATERIALS AND FINISHES
- 1.1 BUS TERMIATOR MODULE WITH 1W RESISTOR TO MIL-PRF-39007/9. SHIELDED USING TIN COATED COPPER BRAID AND Sn96 SOLDER PER ANSI J-STD-006.
- 1.2 SEALED STRAIN RELIEF COVER IS A MODIFIED, CROSS LINKED ELASTOMER PER TE/RAYCHEM SPECIFICATION RW-2070.
- 1.3 BUS CABLE (SEE TABLE ON PAGE I).
- 2.0 APPLICATION
- 2.1 THIS BUS TERMINATOR IS DESIGNED TO BE INSTALLED INTO A DIGITAL MULTIPLEX HARNESS MEETING THE REQUIREMENTS OF MIL-STD-1553B, DEF-STAN-0018 (PART 2). FOR CABLE SPLICING USE SPLICE KIT D-150-0708-5 (NOT SUPPLIED).
- 2.2 CABLES AND BEND RADIUS PER SAE-AS50881, STATIC: 5 X CABLE O.D. MIN, DYNAMIC: 10 X CABLE O.D. MIN.
- 3.0 TEMPERATURE
- 3.1 CABLE/STRAIN RELIEF COVER MEETS OPERATING TEMPERATURE OF -65° TO +150°C CONTINUOUS.
- 4.0 PERFORMANCE
- 4.1 INSTALLED TERMINATOR MEETS THE PERFORMANCE REQUIREMENTS OF MIL-STD-1553B.

Raychem Databus CUSTOMER DRAWING

€TE

TE Connectivity

DRAWN	T.	SEATON	DATE	24/JAN/19	997	SIZE	CAGE CODE	DWG. NO.		REV
ISSUED	Ρ.	DUTTON	DATE	24/JAN/19	997	Α	06090	l D-500	0-0463-XXX	
CAD FIL	E									
D-	-5	00-0463	-XX	KX_D_CD	b	О	NOT SCAL	E THIS DRAWING	SHEET 2 OF 2	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Data Bus Components - Terminators category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

 $CB1052-000\ D-500-0263-017\ D-500-0463-J24-R120\ 44101R\ 44100R\ D-500-0463-612\ D-500-0463-H44-R120\ 331448-000\ 958363-000$