



intercontec
products

958 Receptacle angled

4-pin
Earth-to-Housing Connection according to VDE 0627
flange mount / Flange 88x88

Technical Data

number of pins 4
power 4 (3+PE)
temperature range -20 °C to 130 °C
protection type when connected IP 66/67

Electrical Data

power
rated current max. 150 A*
rated voltage 630V (AC/DC)
rated insulation voltage (L-L) 6000 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3
over voltage category III
max. height for operation 2000 m

Material

housing zinc diecast / chromated
insulation insert PBT, UL 94 / V0
seals FKM
contacts brass / silver plated
contacts brass / silver plated

Contacts

Item / TCPN: 61.181.23 / 61-0181-023-000
type Contact Pin \varnothing 10.0 mm
cross section screw/ for cable shoe M5, DIN 46234, crimp max. 16 mm²
contact resistance < 90 μ Ohm

Item / TCPN: 61.105.23 / 61-0105-023-000
type Contact Pin \varnothing 10.0 mm
cross section fixtures/ at dome
contact resistance < 90 μ Ohm

Tools (not part of product contents)

D E W C 611 M T 03 00 0001 000
D F C 611 T 03 00 0001 000



Contact Arrangement

mating view



Contact Pin \varnothing 10.0 mm
screw/ for cable shoe M5, DIN 46234, crimp max. 16 mm²
Item: 61.181.23
TCPN: 61-0181-023-000



Contact Pin \varnothing 10.0 mm
fixtures/ at dome
Item: 61.105.23
TCPN: 61-0105-023-000




© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Deutschland
Tel.: +49 9962 2002-0
Fax: +49 9962 2002-70
E-Mail: intercontec@te.com
Web: www.intercontec.biz

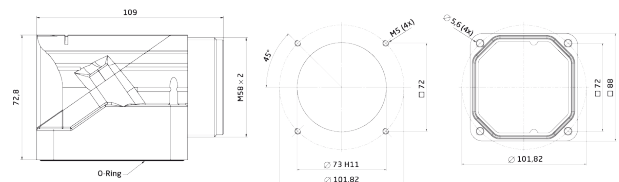

Main Dimensions
Receptacle angled

*for max. wire cross-section
pay attention to the
cross-section of used contacts

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [TE CONNECTIVITY](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1604232](#) [1R3006A20M005](#) [RF-](#)
[12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-](#)
[40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01032](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180](#)
[SC](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#)
[XS2RD4265](#)