



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECN# T-16058	91APR25	Z. TEMAN
C	REVISED PER ECN T-16511	91JUL30	Z. TEMAN
D	REVISED PER ECN T-18956	94 Feb 25	<i>ZS</i>


PART No.	CONTACT	INTERFACE	COLOR CODE
DK-621-X411R	—	THREADED	N/A
DK-621-X411R-P	PIN	THREADED	
DK-621-X411R-S	SOCKET	THREADED	
DK-621-X433R	—	A	RED
DK-621-X433R-1P	PIN	A	
DK-621-X433R-1S	SOCKET	A	
DK-621-X435R	—	B	WHITE
DK-621-X435R-2P	PIN	B	
DK-621-X435R-2S	SOCKET	B	
DK-621-X437R	—	C	GREEN
DK-621-X437R-3P	PIN	C	
DK-621-X437R-3S	SOCKET	C	
DK-621-X439R	—	D	N/A
DK-621-X439R-4P	PIN	D	
DK-621-X439R-4S	SOCKET	D	



PLUG - THREADED CONNECTOR
D-621-0411R



PLUG - BAYONET CONNECTOR
D-621-0433R/0439R



RIGHT ANGLE ADAPTER TUBE
D-600-0601




STRAIN RELIEF

DWG No. EXAMPLE X433R

-0433R .148 MAX. CABLE DIA ACCOMODATION
BRAID TERMINATOR D-600-0030

-1433R .180 MAX. CABLE DIA ACCOMODATION
BRAID TERMINATOR D-600-0056



CONTACT
D-602-0126
(D-602-0127)



BRAID TERMINATOR
D-600-00XX

SPECIFICATION CONTROL DRAWING

© Raychem Corporation 1990

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
METRIC DIMENSIONS ARE
IN BRACKETS.

DECIMALS

.XXX ± — [— mm]
.XX ± — [— mm]

ANGLES

.X ± —

WEIGHT

— lbs [— g]

DRAWN J.B.K. 90 AUG 8

CHECKED *ZS* 94 Feb

APPROVED PJD 14-2-94

APPROVED

CAD NAME 004951-1.DWG

THIRD ANGLE PROJECTION

Raychem

RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

TITLE

RIGHT ANGLE
TRIAxIAL CONNECTOR PLUG
CONNECTOR KITS

SIZE A

CODE IDENT. NO. 06090


DWG. NO.

DK-621-X4XXR[-XX]

REV D

DO NOT SCALE THIS DRAWING

SHEET 1 OF 2

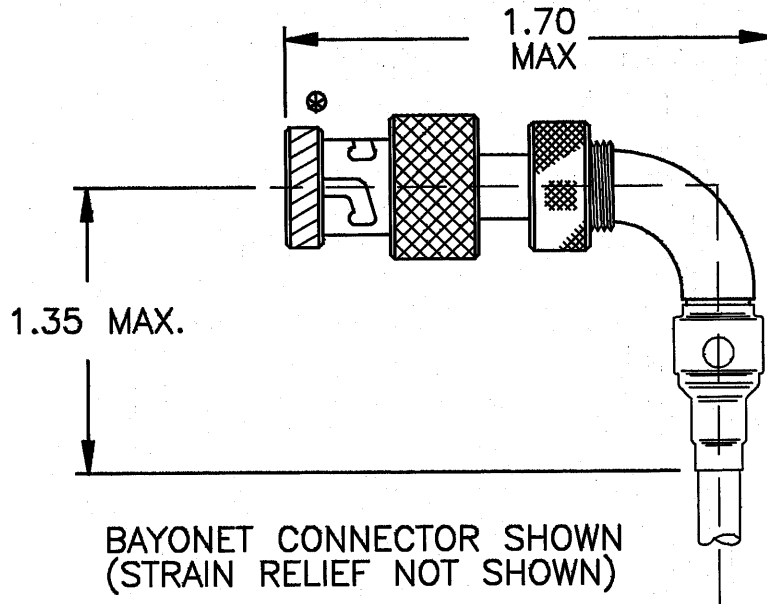

1.0 REFER TO THE FOLLOWING RAYCHEM SPECIFICATION CONTROL DRAWINGS (SCD) FOR INDIVIDUAL COMPONENT PERFORMANCE PARAMETERS, DIMENSIONS AND MATERIAL DETAIL:

- | | |
|-------------------|--|
| D-621-0411R | CONNECTOR, TRIAXIAL, SUBMINIATURE
THREADED COUPLED. FOR RIGHT ANGLE
THREADED ADAPTER |
| D-621-0433R/0440R | CONNECTOR, TRIAXIAL, SUBMINIATURE
BAYONET COUPLED. FOR RIGHT ANGLE
THREADED ADAPTER |
| D-602-0126 | CONTACT, PIN, COAX |
| D-602-0127 | CONTACT, SOCKET, COAX |
| D-600-0030/0056 | BRAID TERMINATOR |
| D-600-0019 | STRAIN RELIEF |
| D-600-0601 | RIGHT ANGLE ADAPTER TUBE |

2.0 REFER TO RAYCHEM SPECIFICATION D-6025 FOR PERFORMANCE AND QUALIFICATION REQUIREMENTS. QUALIFICATION PENDING.

2.1 PERFORMANCE IS DEPENDENT UPON CORRECT USAGE OF SUITABLE AEROBIC ADHESIVE UPON ADAPTER THREADS. (LOKTTITE TYPE 242 IS A SUITABLE ADHESIVE.)

3.0 TERMINATION PROCEDURE: RAYCHEM ES 61249.

4.0 USAGE: CONNECTORS ASSEMBLED FROM THESE KITS CAN HAVE THE CABLE DRESSED IN ANY ORIENTATION AROUND THE AXIS OF THE CONNETOR, CABLE SHOULD BE SECURED IN DESIRED ORIENTATION.

CAD NAME: 004951-2.DWG	DRAWN	J.B.K.	90 AUG 8	SIZE A	CODE IDENT. NO. 06090	DWG. NO. DK-621-X4XXR[-XX]	REV D
	ISSUED			DO NOT SCALE THIS DRAWING		SHEET 2 OF 2	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Data Bus Components - Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[626023-000](#) [D-500-0255-021-01CS252](#) [D-621-0211](#) [D-704-0079](#) [DK-621-0047-2SCS228](#) [DK-621-0412CS325](#) [911225N001](#) [F33352-000](#)
[187711-000](#) [201526-000](#) [477472-000](#) [491952-000](#) [D-600-0174](#) [D-621-0476-L](#) [D-711-03](#) [DK-621-0049-1P](#) [DK-621-0050-1P](#) [DK-621-0412-](#)
[UP](#) [DK-621-0440-4P-CS1498](#) [514433-000](#) [614637N002](#) [645241N002](#) [734977-000](#) [DK-621-0436-2P-CS1498](#) [041809-000](#) [199653-000](#)
[468675-000](#) [608041-000](#) [DK-621-0411-45S](#) [DK-621-1635-2PCS324](#) [DK-621-1636-2S](#) [DK-621-1638-3S](#) [DK-621-1640-4P](#) [149317-000](#) [DK-](#)
[621-0435R-2S](#) [011689-000](#) [D-621-0412-JD](#) [DK-621-0437-3S](#) [DK-621-0435-2S](#) [143981-000](#) [156542-000](#) [210033-000](#) [361727-000](#) [438510-](#)
[000](#) [477643-000](#) [491332-000](#) [118345-000](#) [633671-000](#) [638491-000](#) [639215-000](#)