
# DWFR-32/8-0-STK - ACTIVE

### Raychem | Raychem DWFR

TE Internal #: EH2300-000 Raychem DWFR, Heat Shrink Tubing, Black, Dual Wall Type, 32 Expanded Inside Diameter (Min) 1.26 Expanded Inside Diameter (Min)

### View on TE.com >

Heat Shrink Tubing

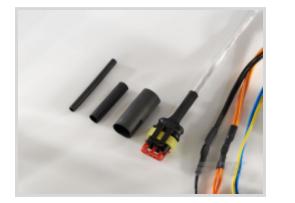

Primary Product Color: Black Wall Type: Dual Expanded Inside Diameter (Min): 32 mm [ 1.26 in ] Recovered Inside Diameter (Max): 8 mm [ .315 in ] Shrink Ratio: 4:1

## Features

## Product Type Features

Product Family	DWFR
Wall Type	Dual



### **Electrical Characteristics**

Voltage (Max)	.6 kV
Body Features	
Primary Product Color	Black
Shrink Ratio	4:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Flexible
Dimensions	
Recovered Wall Thickness (Tolerance)	.5 mm[.02 in]
Cut Length	1220 mm[48 in]
Recovered Wall Thickness (Nominal)	2.54 mm[.1 in]
Expanded Inside Diameter (Min)	32 mm[1.26 in]
Recovered Inside Diameter (Max)	8 mm[.315 in]
Heat Shrink Tubing Size Range	8 – 32 mm[.315 – 1.26 in]
Usage Conditions	

Raychem DWFR, Heat Shrink Tubing, Black, Dual Wall Type, 32 Expanded Inside Diameter (Min) 1.26 Expanded Inside Diameter (Min)



Shrink Temperature (Min)	60 °C
Fluid Resistance	Moisture/Spray Protection, Splash Protection
Heat Shrink Tubing Flammability	Highly Flame-Retardant
Operating Temperature Range	-40 – 110 °C
Heat Shrink Tubing Resistance	Fluids, Mechanical Damage, Strain Relief
Recovery Temperature	110 °C
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Bag & Box
Other	
Meets Low Outgassing Requirements	No
Product Source	US
Product Compliance For compliance documentation, visit the product page on TE.com>	

#### EU RoHS Directive 2011/65/EU

#### Compliant

EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

Raychem DWFR, Heat Shrink Tubing, Black, Dual Wall Type, 32 Expanded Inside Diameter (Min) 1.26 Expanded Inside Diameter (Min)



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## **Compatible Parts**






Raychem DWFR, Heat Shrink Tubing, Black, Dual Wall Type, 32 Expanded Inside Diameter (Min) 1.26 Expanded Inside Diameter (Min)






# Also in the Series | Raychem DWFR

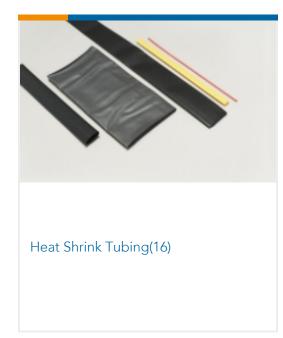

# Customers Also Bought

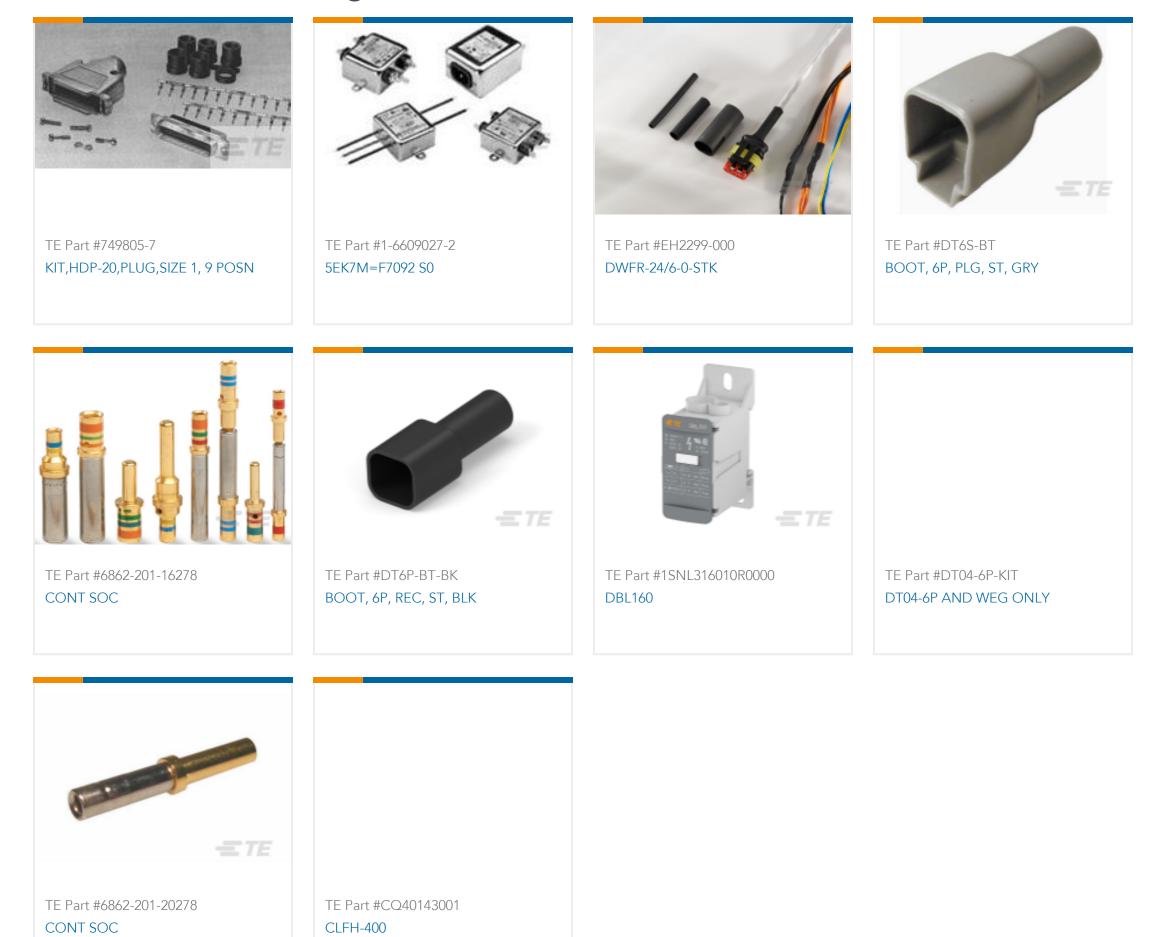

Raychem DWFR, Heat Shrink Tubing, Black, Dual Wall Type, 32 Expanded Inside Diameter (Min) 1.26 Expanded Inside Diameter (Min)



## Documents

Product Drawings DWFR-32/8-0-STK

English

Datasheets & Catalog Pages DWFR Heat Shrink Tubing product flyer

English

Measuring\_Single\_Wall\_Tubing

English

Selecting\_Correct\_Tubing

English

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 5685710001
 CR9960-000
 5734012004
 607381P039
 611112-000
 6284592002
 CX4711-000
 CZ1420-000
 D-306-38
 770-006S302
 770 

 010Y106W1
 770-018S103
 770-018S202W1
 770-018S205W1
 770-020S705
 MFP-3/64"-Clear
 790-3012
 MHHT-4-15K2 

 G-104
 8003012003
 MIL-LT-1-1/2-4-SP
 MIL-LT-1-1/2-9-STK
 MIL-LT-1/2-2-STK
 MIL-LT-3/0-SP
 MIL-LT-3/32-0-SP
 MIL-LT-3/32-6-SP

 MIL-LT-3/4-4-STK
 MIL-LT-3/4-6-SP
 839602-000
 8423-6
 FP301-116-48"-Clear
 FP301-12-6"-Clear
 FP301-1/4-48"-White-Hdr

 FP301-18-48"-Black-Hdr
 FP301-1/8-6"-Black
 FP301-18-6"-Black-Bulk
 FP301-316-48"-Blue-Hdr
 912229N002
 R280637030
 HDCW-5515 

 1000
 HDT-0300-48A-BLACK
 HDT-0400-48A-Black
 HDT-0800-48A-RED
 HDT1100-48A-BLK
 HDT1500-48A-BLK
 HDT-2000-48A 

 Black
 RHW-70/20-1200/ADH-0
 DWP-125-0.450-4-55MM-CS879
 156082-000
 MT5500-3/8-X-SP
 SP