

# SPECIFICATION CONTROL DRAWING

**55PC2134**

TITLE

THREE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT


Date

12-7-95

Revision

D

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

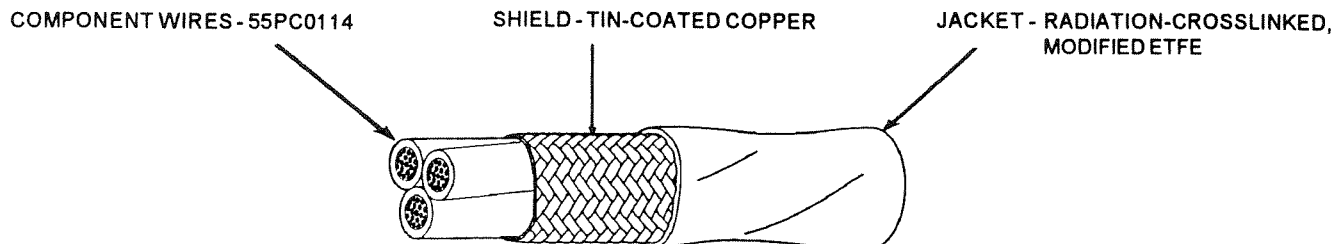

### CONSTRUCTION DETAILS

| PART NUMBER   | CONDUCTOR SIZE (AWG) | SHIELD STRAND THICKNESS (± .0004) | JACKET THICKNESS (in.) |             | DIAMETER (in.)   |              |                  | WEIGHT (lbs/1000 ft.) |                  |
|---------------|----------------------|-----------------------------------|------------------------|-------------|------------------|--------------|------------------|-----------------------|------------------|
|               |                      |                                   | LOWER SPEC LIMIT       | TARGET WALL | LOWER SPEC LIMIT | TARGET VALUE | UPPER SPEC LIMIT | TARGET VALUE          | UPPER SPEC LIMIT |
| 55PC2134-24-* | 24                   | .0015                             | .0060                  | .0080       | .095             | .100         | .105             | 8.89                  | 9.45             |
| 55PC2134-22-* | 22                   | .0015                             | .0060                  | .0080       | .108             | .113         | .118             | 12.09                 | 12.72            |
| 55PC2134-20-* | 20                   | .0015                             | .0065                  | .0085       | .126             | .131         | .136             | 17.21                 | 17.95            |
| 55PC2134-18-* | 18                   | .0015                             | .0065                  | .0085       | .146             | .152         | .157             | 24.62                 | 25.60            |
| 55PC2134-16-* | 16                   | .0015                             | .0065                  | .0085       | .161             | .168         | .175             | 30.67                 | 31.93            |

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lb/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red, blue and yellow component wires; white jacket: 55PC2134-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89504-002-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6309UE-877-1000](#) [M3905-BK005](#) [6502FE 8771000](#)  
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)  
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-](#)  
[1000](#) [83653-002-5000](#) [8404-060-500](#) [8469 060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#)  
[8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [8780-060-1000](#) [8782-001-U1000](#) [9159-060-500](#) [9318-060-1000](#) [939870-000](#) [9423 060U500](#)  
[9444 060U1000](#) [9497 0001000](#) [9520-060-1000](#) [9524-060-1000](#) [9546-060-500](#) [9572-002-U500](#) [9774-060-1000](#) [A43962-000](#) [1232A1-008-](#)  
[1000](#)