
CUSTOMER DRAWING

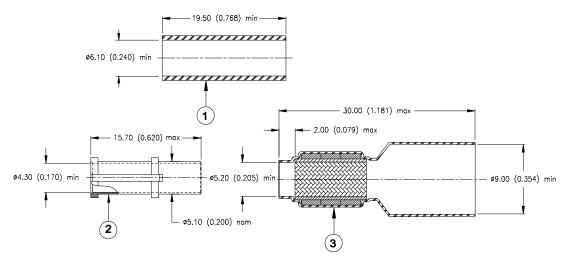


MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
- 3. SOLDERSHIELD DEVICE:
 - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
 - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
 - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.

APPLICATION

- 1. These parts are used on Tyco Electronics/Raychem Hexashield adaptors.
- 2. Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
- 3. Temperature range: -65° C to $+175^{\circ}$ C.
- 4. For all other application, contact Tyco Electronics/Raychem technical service.

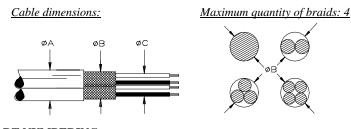

| Cable Dimensions | | | | | | | |
|------------------|---------|---------|---------|---------|--|--|--|
| øΑ | | øB | | øС | | | |
| Min. | Max. | Min. | Max. | Max. | | | |
| 4.30 | 8.90 | 3.50 | 6.20 | 4.20 | | | |
| (0.169) | (0.350) | (0.138) | (0.244) | (0.165) | | | |

PART NUMBERING

HET-A-04X Ferrule Plating:

- B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test.
- C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-00.

| Tyco Electronics | | | Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A. | TITLE: FERRULE AND SOLDERSHIELD DEVICE FOR HEXASHIELD ADAPTERS | | | |
|---|-------------|--|--|--|-------|-------------|--|
| Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] | | Raychem | DOCUMENT NO.: HET-A-04X | | | | |
| TOLERANCES: | ANGLES: N/A | Tyco Electronics reserves the right to | | | | | |
| 0.00 N/A | | amend this drawing at any time. Users | | REV: | DATE: | | |
| 0.0 N/A | ROUGHNESS | should evaluate the suitability of the | | Α | | 11-May-07 | |
| 0 N/A | IN MICRON | product for their application. | | 11 | | 11 iviay or | |
| DRAWN BY: | CAGE CODE: | REPLACES: | ECO NUMBER: | SCALE: | SIZE: | SHEET: | |
| K.YEE | 06090 | D030535 | 07-010934 | NTS | A | 1 of 1 | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solder Sleeves & Shield Tubing category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

899170-000 620040N001 620069N003 CTA-0050-01 629624-000 6500750004 6501390002 CX0781-000 696396-000 697080-000 D-150-0331CS2902 D-181-1222-90/9CS2800 D-300-01CS1108 715325N001 908357N001 982127-1 D-436-0182CS246 D-436-37CS2651 D-436-61CS246 D-436-82-CS2621 D-659-0087 E53797N001 CB0213-000 CB0219-000 S200-2-01 S200-4-00CS2904 LSS-81-16AA-CS5575 ST18-2-00 FLX40-020-04-CS8651 325534-000 CTA-0025 D-108-07CS436 D-128-0010 D-141-0108CS404 D-144-41CS1371 D-150-0231-NRCS2896 D-150-1011 395947-000 427243N001 B-801-18-01 C67137-000 CB0220-000 D-436-0185CS1102 D-436-36CS2908 D-436-37CS2908 D-436-52CS246 D-436-83CS2705 D44133N001 LSS-26-8A 626168-000