

REV. 0
DCO 15131

| | |
|-----------------|----------------|
| COIL: @ +25 °C | |
| RESISTANCE | 320 OHMS ± 10% |
| NOMINAL VOLTAGE | 12-15 VDC |
| MUST OPERATE | 6.8 VDC |
| MUST RELEASE | 0.68 VDC |


ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 2000 | CPS @ | 20 | g's |
| SHOCK | 100 | g's | 6 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

NOTES:

| | |
|----------------|------------|
| OPERATE TIME | 4.0 MS MAX |
| RELEASE TIME | 4.0 MS MAX |
| CONTACT BOUNCE | 2.0 MS MAX |

CUSTOMER DATA SHEET

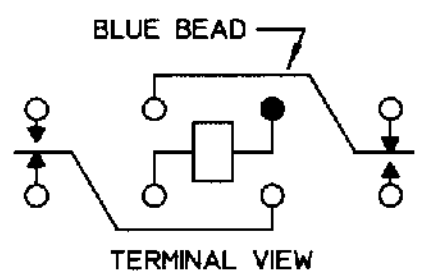

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE 100,000
OPERATIONS

DR. R.B. 2/22/99 CK. Galt 2-22-99



CUST. C. I. I. STD.
CUST. NO.

TYPE "HFW" RELAY

HFW1201B00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#)