

COIL: @ +25 °C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.0 VDC
 MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C


NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE
OF -48 VDC WITH BIFILAR COIL
OPERATE & RELEASE 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUST. QPL
 CUST. NO. M39016/22-009M

TYPE "HMB" RELAY

CUSTOMER DATA SHEET

BLUE BEAD

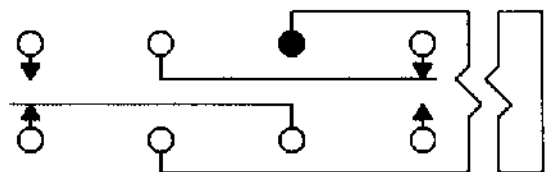

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/14/95 CK. *[Signature]*

COMMUNICATIONS
 INSTRUMENTS, INC.

HMB1201K01M

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[LZN4-US-DC12](#) [LZNQ4-US-DC24](#) [LZNQ4-US-DC48](#) [6-1393813-4](#) [6-1462039-0](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617529-6](#) [M39016/20-054M](#) [M39016/27-030M](#) [67RPCX-3](#) [MAHC-5494](#) [D3493L](#) [7-1393809-0](#) [7-1393813-3](#) [741B8](#) [7556072001](#) [MF-11AM-24](#) [MF1201N12](#) [MF-17A-24](#) [FBR244D012/02CP](#) [FBR244D024/02CS](#) [80.010.4522.1](#) [FL-4036](#) [FLH-11D-6](#) [831A7](#) [MMS124](#) [FTR-B4GA006Z](#) [FW1102S06](#) [FW1201S39](#) [FW1210S02](#) [FW1521S01](#) [FW5A1201S14](#) [9-1393813-6](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [G6E-184P-ST-US-DC48](#) [G6G234CDC24](#) [A07A939BZ1-0388](#) [A150-0005](#) [PZ-2A2420](#) [HB1-DC6V](#) [HB1-DC9V](#) [R10-14A10-240](#) [R10-14D10-12](#) [R10-5A10-120F](#) [R10-E1L8-S200](#) [R10-E2468-1](#) [R10-E4Z2-V700](#) [R10-T1L2N-115V](#)