

HRHT (High Ratio Heat-Shrink Tubing)

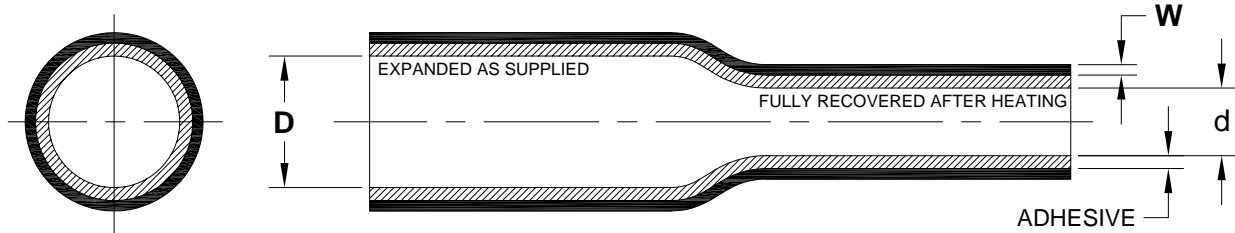


Table of Dimensions, inch (mm):

Part Description	Expanded I.D. D, Min.	Recovered I.D. d, Max.	Recovered Wall W, Ref.
HRHT-1/X	0.75 (19)	0.12 (3.0)	0.155 (3.9)
HRHT-2/X	1.50 (38)	0.23 (5.8)	0.155 (3.9)
HRHT-3/X	2.00 (51)	0.36 (9.0)	0.155 (3.9)
HRHT-4/X	3.00 (76)	0.50 (12.7)	0.155 (3.9)
HRHT-5/X	4.50 (114)	0.75 (19.0)	0.155 (3.9)

Notes:

- The hi-ratio tubing is heat-shrinkable and has expansion ratios as high as 6:1.
- "X" indicates reference-recovered length in inches (e.g. for 3.0-inch length: HRHT-2/3). The tolerance shall be +/- 10% of the specified recovered length.
- The tubing is UL recognized in sizes 1 through 4 only. The reference number is E85381(R).

Material:

-152, heat shrinkable, crosslinked flexible polyolefin.
Standard factory applied hot melt adhesive is /97 or /42, as required.

Color: Black

Specification Reference:

Item	Specification
Heat-shrinkable tubing	SAE-AS81765/1
Adhesive /97, S1297	RW-2019
Adhesive /42, S1017	RT-1050/1

CUSTOMER DRAWING

		Raychem Tubing 305 Constitution Drive, Menlo Park, CA 94025		TITLE:			
				HRHT High Ratio Heat-Shrink Tubing			
Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets]				DOCUMENT NO.:			
				HRHT-1thru5/X			
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				REV:			
				C			
DRAWN BY:		CAGE CODE:	Org. Date:	File:	DCR NO.:	SIZE	SHEET:
U. Nguyen		06090	5/28/09	HRHT-1thru5X.doc	R090640	A	1 of 2

Table 2: Properties

	Property	Performance	Test Method
Physical	Tensile Strength	1200 psi (8.3 Mpa) minimum	ASTM D-412
	Ultimate Elongation	250% minimum	ASTM D-412
	Specific Gravity	1.4 maximum	ASTM D-792
	Water Absorption	0.5% maximum	ASTM D-570 A
	Hardness	35 ± 5 Shore D	ASTM D-2240
	Flammability	Pass	ASTM D-635
	Corrosion Resistance	Pass	MIL-I-81765
	Low Temperature Flexibility 4 hours at -67 ± 2°F (-55 ± 1°C)	Pass	MIL-I-81765
	Heat Resistance 168 hours at 347± 2°F (175 ± 1°C)	Ultimate elongation, 200% minimum Tensile strength, 1000 psi (6.9 Mpa) minimum	MIL-I-81765
	Heat Shock 4 hours at 437 ± 5°F (225 ± 2°C)	No cracking, dripping or flowing	MIL-I-81765
Elastic Memory		275% minimum expansion to 4 inch (10 cm) of a fully recovered test specimen and 93% recovery of expanded specimen after oven conditioning for 1 minute at 302 ± 4°F (150 ± 2°C)	
Electrical	Dielectric Strength	200 V/mil (7880 V/mm) minimum	ASTM D-149
	Volume Resistivity	10 ¹² ohm-cm minimum	ASTM D-257
Chemical Fluid Resistance		Ultimate elongation, 200% minimum Tensile strength, 750 psi (5.2 Mpa) minimum	MIL-I-81765
Operating Temperature		-131 to + 275°F (-55 to +135° C) (without adhesive)	

Rev. Date: July 15, 2009	Sheet: 2 of 2	Document No. HRHT-1thru5/X	Rev.: C
-----------------------------	------------------	-------------------------------	------------

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[5685710001](#) [CR9960-000](#) [5734012004](#) [607381P039](#) [611112-000](#) [6284592002](#) [CX4711-000](#) [CZ1420-000](#) [D-306-38](#) [770-006S302](#) [770-020S705](#) [MFP-3/64"-Clear](#) [790-3012](#) [MHHT-4-15K2-G-104](#) [8003012003](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#) [MIL-LT-3/4-4-STK](#) [MIL-LT-3/4-6-SP](#) [839602-000](#) [8423-6](#) [FP301-116-48"-Clear](#) [FP301-12-6"-Clear](#) [FP301-1/4-48"-White-Hdr](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [912229N002](#) [R280637030](#) [HDCW-5515-1000](#) [HDT-0300-48A-BLACK](#) [HDT-0400-48A-Black](#) [HDT-0800-48A-RED](#) [HDT1100-48A-BLK](#) [HDT1500-48A-BLK](#) [HDT-2000-48A-Black](#) [RHW-70/20-1200/ADH-0](#) [DWP-125-0.450-4-55MM-CS879](#) [156082-000](#) [MT5500-3/8-X-SP](#) [MT-FEP-045-032-008-X-60IN](#) [EPS200-1/4-48"-Black](#) [EPS200-1-48"-Black](#) [EPS200-3/16-48"-Black](#) [EPS200-38-48"-Black-Bulk](#)