

Applications

- Automotive
- Instrumentation
- White goods
- Telecommunications

Benefits

- RoHS Compliant
- Halogen and Lead Free
- Sharp detection feeling
- Compact Size

JJ Series – Detector Switches




TE Connectivity is pleased to introduce its JJ Series of Detector Switches, suitable for a wide variety of applications given their several presentations ranging from horizontal or vertical actuated options as well as Gull-winged, J-leaded and Through-Hole mounting possibilities.

The Detector Switches will be offered in a wide range of sizes giving the possibility for countless applications going from automotive to telecommunications.

JJ Series – Family Classification


| Series | Body Size |
|--------|------------------------------|
| JJA | 3.5x2.8 mm |
| JJB | 3.5x2.98 mm |
| JJC | 3.5x3.3 mm |
| JJD | 4.2x3.6 mm |
| JJE | 4.7x3.5 mm |
| JJF | 4.7x3.8 mm |
| JJG | 5.7x4.0 mm (High-Rating) |
| JJH | 5.7x4.0 mm (Standard-Rating) |
| JJI | 5.0x4.4 mm |
| JJJ | 6.0x4.85 mm / 5.5x4.7 mm |
| JJK | 6.3x3.0 mm |
| JJL | 6.5x3.9 mm |
| JJM | 5.7x4.0 mm |
| JJN | 5.7x4.0 mm (Wedge) |
| JJO | 10.0x3.8 mm |
| JJP | 10.6x10.0 mm |

JJI Family – 5.0x4.4 mm

| | | |
|---|-----------------------|-------------------|
|  | Contact Rating | 10mA, 5VDC |
| | Contact Resistance | 500mΩ Max. |
| | Insulation Resistance | 100MΩ Min. 100VDC |
| | Dielectric Strength | 100VAC/1 minute |
| | Operating Force | 30gF Max. |
| | Travel | 1.5mm |
| | Operating Life | 100,000 cycles |
| | Operating Temperature | -10°C to 60°C |
| | Storage Temperature | -40°C to 70°C |


| Features | Applications |
|--|---|
| <ul style="list-style-type: none"> • Compact size. • Two-way operation, auto return • NO circuit. | <ul style="list-style-type: none"> • Computer peripheral. • Instrumentation. • Telecommunications. |

Circuit

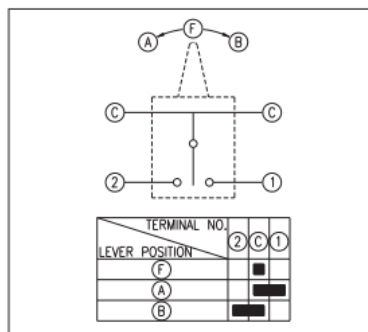


How To Order

JJI - H0 - U - G - 150 - NO - P - M - R - TR

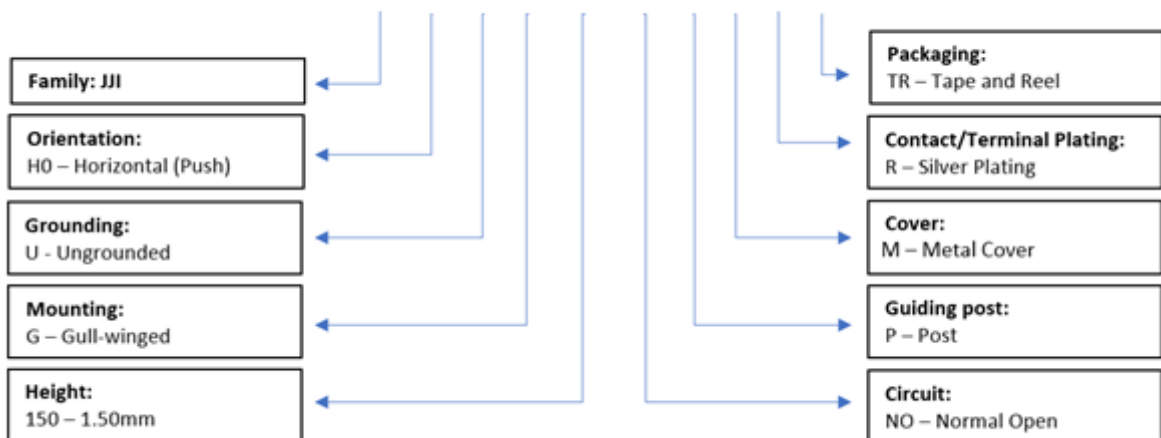

Diagrams

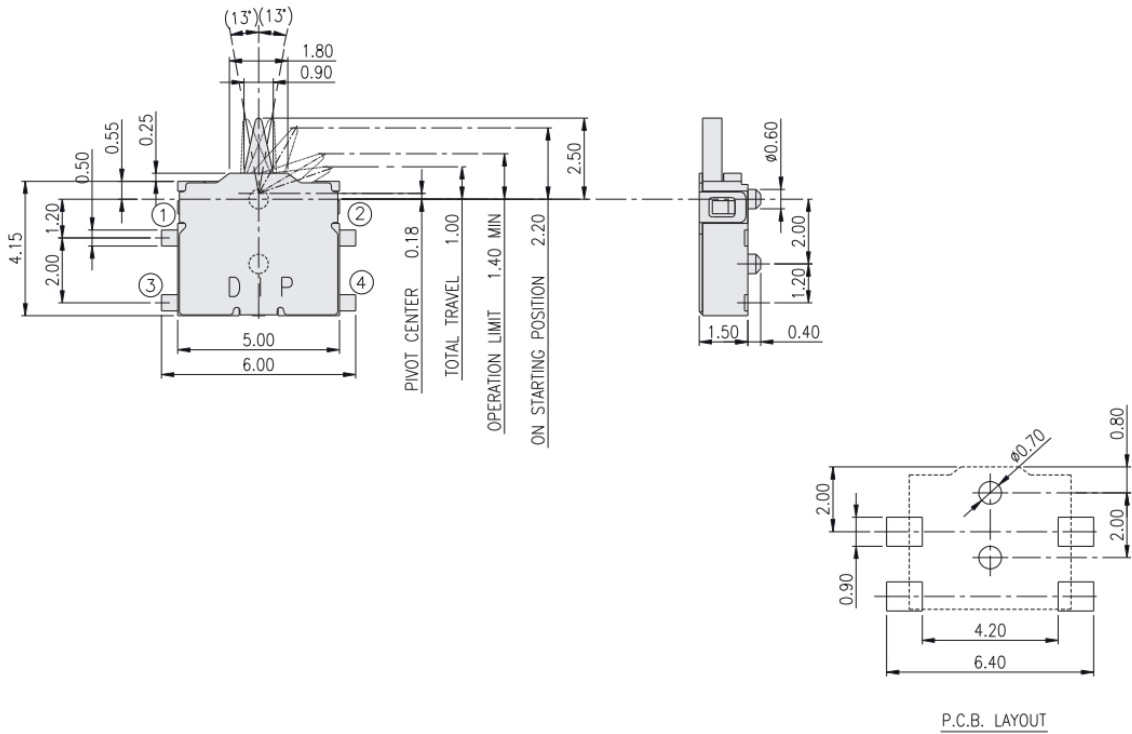

PN List

| Smart PN | Orientation | Grounding | Mounting | Height | Circuit | Guiding Post | Cover | Plating | Packaging | MOQ | TE PN |
|-------------------|-------------------|------------|-------------|--------|---------|--------------|-------|---------|---------------|-------|-----------|
| JJIH0UG150NOPMRTR | Horizontal (Push) | Ungrounded | Gull-winged | 1.50mm | NO | Post | Metal | Silver | Tape and Reel | 3,800 | 2331383-1 |

1. Style

“Detector Switches” are mainly used as signal switches of electric devices, with the general requirements of mechanical and electrical characteristic.

1.1 Operating Temperature Range: -10°C to 60°C



1.2 Storage Temperature Range: -40°C to 70°C


1.3 The shelf life of product is within 6 months.

2. Current Range: 10mA, 5 VDC

3. Type of Actuation: Momentary

4. Test Sequence:


| | Item | Description | Test Conditions | Requirements |
|----------------------|------|---------------------------------|--|---|
| Appearance | 1 | Visual Examination | Physical inspection without applying any external forces. | There shall be no defects that affect the serviceability of the product. |
| Electric Performance | 2 | Contact Resistance | Actuate the switch (1.50±0.3mm) and measure contact resistance using a micro-Ohmmeter. | 500mΩ Max. |
| | 3 | Insulation Resistance | Measurements shall be made at 100 VDC potential between terminals and cover. | 100MΩ Min. |
| | 4 | Dielectric Withstanding Voltage | Apply 100 VAC (50Hz or 60Hz) between terminals and cover for 1 minute. | There shall be no breakdown or flashover |
| | 5 | Capacitance | Capacitance shall be measured at 1 MHz between terminals. | 5 pF Max. |
| | 6 | Bounce | 3 to 4 operations at a rate of 1 cycles per second  | 10m seconds Max.  |

| | | | | |
|------------------------|----|------------------------|--|--|
| Mechanical Performance | 7 | Operating Force |  | 30gF Max. (0.27N Max.) |
| | 8 | Stop Strength | Static load of 200gF (2N) can be vertical applied for 15 seconds. | 1) Shall be free from pronounced backlash and falling-off or breakage terminals. 2) As shown in item 4 to 5 3) Contact Resistance: 1Ω 4) Insulation Resistance: 10MΩ Min. |
| | 9 | Solder Heat Resistance | (See chart below) | 1) Shall be free from pronounced backlash and falling-off or breakage terminals 2) As shown in item 4 to 5 3) Contact Resistance: 1Ω Max. 4) Insulation Resistance: 10MΩ Min. |
| | 10 | Vibration | Test per Method 201A of MIL-STD-202F 1) Swing distance=1.5mm 2) Frequency: 10-55-10Hz in 1-min/cycle. 3) Direction: 3 vertical directions including the directions of operation 4) Test time: 2 hours each direction | 1) As shown in item 4 to 7 2) Contact Resistance: 1Ω Max. 3) Insulation Resistance: 10MΩ Min. |
| | 11 | Shock | Test per Method 213B condition A of MIL-STD-202F 1) Acceleration; 50G 2) Action time:11±1m seconds 3) Testing Direction: 6 sides 4) Test Cycle: 3 times in each direction | 1) As shown in item 4 to 7 2) Contact Resistance: 1Ω Max. 3) Insulation Resistance: 10MΩ Min. |
| Durability | 12 | Operating Life | Tested as follows: 1) 10mA, 5 VDC resistive load 2) Apply a static load in the direction of operation equal to the operating force to the center of the stem. 3) Rate of Operation: 15 to 20 operations per minute. 4) Cycle of Operation: 100,000 cycles Min. | 1) As shown in item 4 to 5 2) Operating force: ±30% of initial force. 3) Contact Resistance: 10Ω Max. 4) Insulation Resistance: 10MΩ Min. 5) Bounce: 10m seconds Max. |

| | | | | |
|-------------|----|----------------------------|---|--|
| Water-Proof | 13 | Resistance Low Temperature | Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 hour before the measurements are made: 1) Temperature: $-25\pm 2^{\circ}\text{C}$ 2) Time: 96 hours | 1) As shown in item 4 to 7 2) Contact Resistance: 1Ω Max. 3) Insulation Resistance: $10\text{M}\Omega$ Min. |
| | 14 | Heat Resistance | Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 hour before the measurements are made: 1) Temperature: $70\pm 2^{\circ}\text{C}$ 2) Time: 96 hours | 1) As shown in item 4 to 7 2) Contact Resistance: 1Ω Max. 3) Insulation Resistance: $10\text{M}\Omega$ Min. |
| | 15 | Humidity Resistance | Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 hour before the measurements are made: 1) Temperature: $40\pm 2^{\circ}\text{C}$ 2) Relative Humidity: $90\sim 95\%$ 3) Time: 96 hours | 1) As shown in item 4 to 7 2) Contact Resistance: 1Ω Max. 3) Insulation Resistance: $10\text{M}\Omega$ Min. |

5. Soldering Conditions:

■ Recommended Soldering Profile for the JJI Series

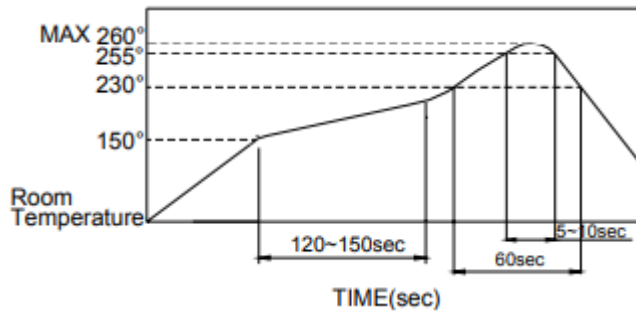

■ The temperatures defined above are the temperatures measured on the surface of the Printed Circuit Board. There are cases where the printed circuit board's temperature differs greatly from the temperature of the switch. Critical note: the switch's surface temperature must not exceed 260°C .

■ Manual Soldering

Soldering Temperature: 350°C Max.
Continuous Soldering Time: 3 seconds Max.

■ Precautions in Handling

- Care must be taken to ensure excess flux on the top surface of the printed circuit board does not adhere to the switch.
- Do not wash the switch.



■ Recommended storage conditions:

Store the products in the original packaging material. After opening the package, the remaining products must be stored in the appropriate moisture-proof & airtight environment.

Do not store the switch in the following environment or it may affect performance and solderability:

1. temperatures below -10° C to 40°C & humidity at 85% (min)
2. environment with corrosive gas
3. storage over 6 months
4. place in direct sunlight

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Detector Switches](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[E3S-LS5C4S](#) [SPVQ850300](#) [21075-6](#) [SPVQ860100](#) [K2CU-F20A-F AC220](#) [D3DM0005H](#) [D3DM0001E](#) [D3DM0003A](#) [HARB0012](#) [PP2-7H1-2D2](#) [PP1-FB7-2D2](#) [PP2-7U1-2B2](#) [PP1-ET7-2B2](#) [MR1000AWA](#) [MR1000BWA](#) [ESE-24SH6](#) [ESE-31R11T](#) [ESE-23F101](#) [ESE-13V01D](#) [ESE-13V01C](#) [ESE-13V01A](#) [ESE-13H01B](#) [ESE-11MH1T](#) [ESE-11MH2T](#) [ESE-11MV1](#) [ESE-31L11T](#) [HDS001R](#) [SPVL110102](#) [ESE-11MV1T](#) [ESE-13V01B](#) [ESE-23J101](#) [SPPW811200](#) [ESE-58R61B](#) [SPVQ361300](#) [ESE-58R11B](#) [SPVT210201](#) [SPVL120101](#) [ESE-24CMV9T](#) [DS080](#) [DS0900502RP](#) [T0-SCB22MP1NC1](#) [T0-SCB22MP1NSX](#) [ESE-11SH5](#) [ESE-13H01A](#) [ESE-13H01C](#) [ESE-13H01D](#) [ESE-18R63D](#) [ESE-24CMH6T](#) [SPVN210101](#) [SPPB110300](#)