JMAW-26XL VACTIVE

CII

TE Internal #: 1617125-5 TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 26.5VDC TO-5/.100 Grid Relay Input Voltage, 1A TO-5/.100 Grid Relay Contact Current Rating

View on TE.com >

Relays, Contactors & Switches > Relays > Mil-Aero Relays > TO-5/.100 Grid Relays



TO-5/.100 Grid Relay Contact Arrangement: **2 Form C, DPDT, 2 C/O**

TO-5/.100 Grid Relay Input Voltage: 26.5 VDC

Coil Suppression Diode: Without

MOSFET Driver: Without

Transistor Driver: Without

Features

Product Type Features

 Enclosure Type
 Hermetically Sealed

 Relay Type
 Military/Aerospace High Performance



Coil Latching	Without				
Product Type	Relay				
MOSFET Driver	Without				
Configuration Features					
Transistor Driver	Without				
Electrical Characteristics					
Coil Magnetic System	Non-Polarized, Monostable				
Vibration	30G's, 10 – 3000Hz				
Actuating System	DC				
Shock	75G's, 6ms				
Coil Power Measurement	Milliwatts				
TO-5/.100 Grid Relay Input Voltage	26.5 VDC				
Coil Suppression Diode	Without				
Coil Voltage	26.5 VDC				
TO-5/.100 Grid Relay Coil Resistance	1560 Ω				

JMAW-26XL

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 26.5VDC TO-5/.100 Grid Relay Input Voltage, 1A TO-5/.100 Grid Relay Contact Current Rating



TO-5/.100 Grid Relay Coil Power Rating (DC)	450 mW
Coil Polarity Protection Diode	Without
TO-5/.100 Grid Relay Contact Switching Voltage (Max)	28
Contact Features	
Contact Current Class	Low Level – 1 A
TO-5/.100 Grid Relay Contact Arrangement	2 Form C, DPDT, 2 C/O
TO-5/.100 Grid Relay Contact Current Rating	1 A
Termination Features	
Termination Type	Long Leads
Mechanical Attachment	
TO-5/.100 Grid Relay Mounting Type	Printed Circuit Board
Usage Conditions	
Operating Temperature Range	-65 – 125 °C
Product Compliance For compliance documentation, visit the product page on TE.com>	

EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Compliant

Product Compliance Disclaimer

EU RoHS Directive 2011/65/EU

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

JMAW-26XL

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 26.5VDC TO-5/.100 Grid Relay Input Voltage, 1A TO-5/.100 Grid Relay Contact Current Rating




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought

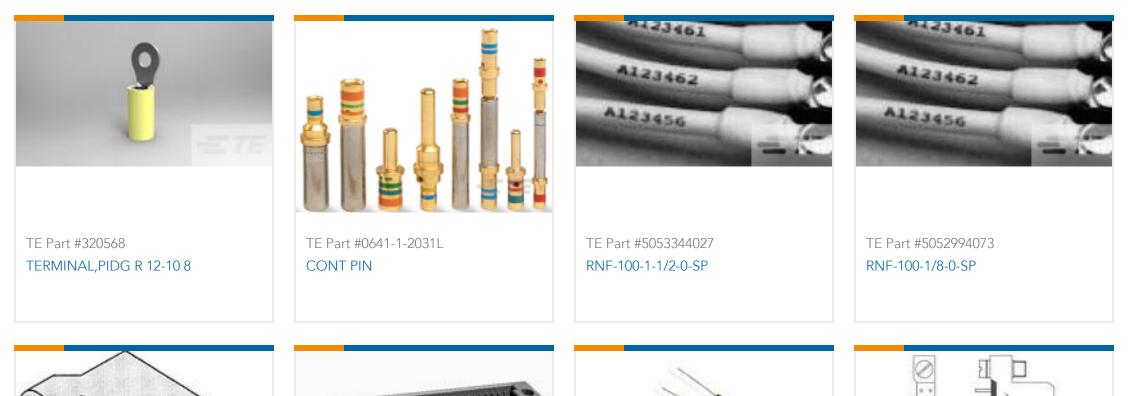

0 250 22.18 P 00			
TE Part #3-520133-2 ULTRA-FAST 250 ASY REC 16-14 AWG TPBR	TE Part #5532436-6 ASSY,PIN,VERTICAL,HDI,LEAD-FRE	TE Part #8-1623771-2 C3A 3R9 5% AMMO PK	TE Part #1821189-1 MCA 18 PIN ASSEMBLY
TE Part #ZPF000000000200234 797-8010-04	TE Part #ZPF000000000200235 797-8010-05		

Documents

CAD Files

3D PDF

3D

Customer View Model

C For support call+1 800 522 6752

JMAW-26XL

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 26.5VDC TO-5/.100 Grid Relay Input Voltage, 1A TO-5/.100 Grid Relay Contact Current Rating



ENG_CVM_CVM_1617125-5_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1617125-5_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1617125-5_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages RELAY

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Relays category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

6-1617801-8 6-1618107-9 7-1618273-3 EV250-4A-02 EV250-6A-01 FCA-125-CX8 FCA-325-159 FCA-410-138 GCA63A220VAC60HZ GCA63A600VAC60HZ 1-1672275-3 1-1833005-4 H-16/S1 H-8C ACC530U20 RF303ZM4-12 DH18DA RM699BV-3011-85-1005 AR4-15F13-C01 AR7-41F11 AVR907 15732A200 B329 B490A 1618279-1 BHR124Y N417 2071229-4 P30C42A12D1-120 2-1618375-1 2-1618396-6 2-1618398-1 JMAPD-5XL JMGACD-5M JMGSCD-5L K8DSPH1200480VAC KA-3C-12A 2307497 RT334012WG SAH159 301-17SX SL6H3-26.5VDC 1618105-2 1618112-6 1618113-5 1618276-6 A837D A862B1 ACC530U10 ACC730-8025B