

### CII

TE Internal #: 1-1617145-3 TO-5/.100 Grid Relays, Contact Arrangement 2 Form C, DPDT, 2 C /O, 2.7VDC Input Voltage, Without MOSFET Driver, With Transistor Driver

#### View on TE.com >

Relays, Contactors & Switches > Relays > Mil-Aero Relays > TO-5/.100 Grid Relays



Contact Arrangement: 2 Form C, DPDT, 2 C/O

Input Voltage: 2.7 VDC

Coil Suppression Diode: Without

MOSFET Driver: Without

Transistor Driver: With

### Features

### Product Type Features

 Enclosure Type
 Hermetically Sealed

 Relay Type
 Military/Aerospace High Performance



Coil Latching	Without
Product Type	Relay
MOSFET Driver	Without
Configuration Features	
Transistor Driver	With
Electrical Characteristics	
Coil Magnetic System	Non-Polarized, Monostable
Vibration	30G's, 10–3000Hz
Actuating System	DC
Shock	75G's, 6ms
Coil Power Measurement	Milliwatts
Input Voltage	2.7 VDC
Coil Suppression Diode	Without
Coil Voltage	5 VDC
Coil Resistance	50 Ω

# 1-1617145-3

TO-5/.100 Grid Relays, Contact Arrangement 2 Form C, DPDT, 2 C/O, 2.7VDC Input Voltage, Without MOSFET Driver, With Transistor Driver



Coil Power Rating (DC)	500 mW
Coil Polarity Protection Diode	Without
Contact Switching Voltage (Max)	28
Contact Features	
Contact Current Class	Low Level – 1 A
Contact Arrangement	2 Form C, DPDT, 2 C/O
Contact Current Rating	1 A
Termination Features	
Termination Type	PC Pins
Mechanical Attachment	
Mounting Type	Printed Circuit Board
Usage Conditions	
Operating Temperature Range	-65 – 125 °C
Product Compliance For compliance documentation, visit the product page on TE.com>	

Not Compliant

EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUL 2019 (201) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content

Solder Process Capability

Not lead free process capable

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the

# 1-1617145-3

TO-5/.100 Grid Relays, Contact Arrangement 2 Form C, DPDT, 2 C/O, 2.7VDC Input Voltage, Without MOSFET Driver, With Transistor Driver




product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**



# Customers Also Bought

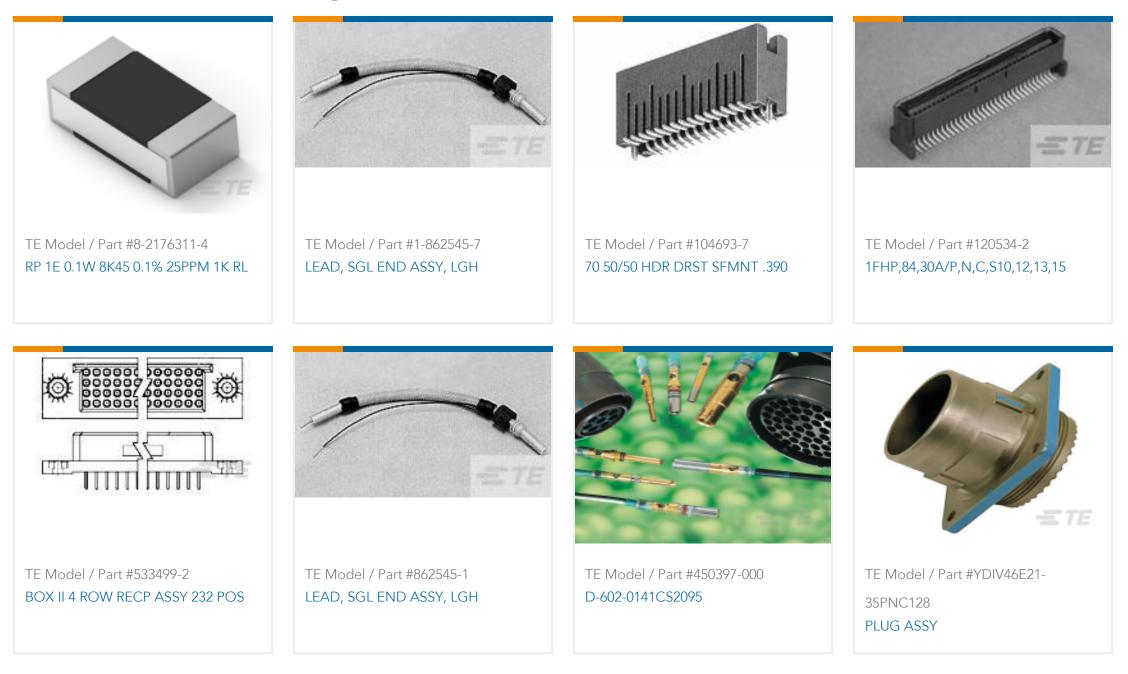



# Documents

# CAD Files

3D PDF

3D

# 1-1617145-3

TO-5/.100 Grid Relays, Contact Arrangement 2 Form C, DPDT, 2 C/O, 2.7VDC Input Voltage, Without MOSFET Driver, With Transistor Driver



Customer View Model

### ENG\_CVM\_CVM\_1-1617145-3\_G.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1617145-3\_G.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1617145-3\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5\_sec1\_MGA

English

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Relays category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

6-1617801-8 6-1618107-9 7-1618273-3 EV250-4A-02 EV250-6A-01 FCA-125-CX8 FCA-325-159 FCA-410-138 GCA63A220VAC60HZ GCA63A600VAC60HZ 1-1672275-3 1-1833005-4 H-16/S1 H-8C ACC530U20 RF303ZM4-12 DH18DA RM699BV-3011-85-1005 AR4-15F13-C01 AR7-41F11 AVR907 15732A200 B329 B490A 1618279-1 BHR124Y N417 2071229-4 P30C42A12D1-120 2-1618375-1 2-1618396-6 2-1618398-1 JMAPD-5XL JMGACD-5M JMGSCD-5L K8DSPH1200480VAC KA-3C-12A 2307497 RT334012WG SAH159 301-17SX SL6H3-26.5VDC 1618105-2 1618112-6 1618113-5 1618276-6 A837D A862B1 ACC530U10 ACC730-8025B