
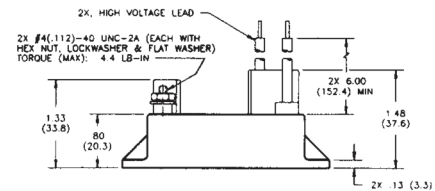
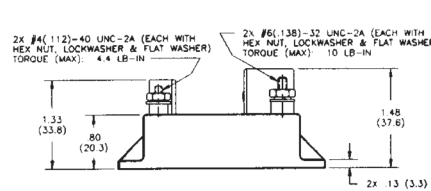
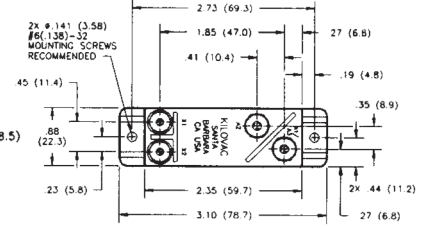


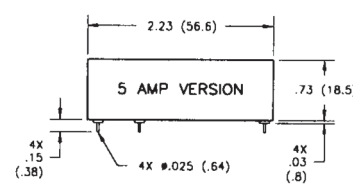
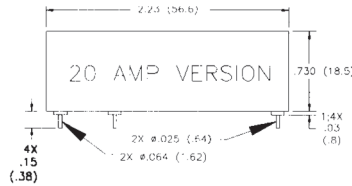
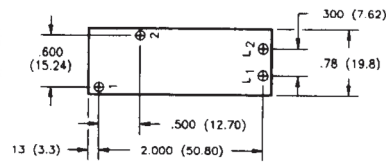


**K81 A/B Series Make & Break Load Switching — 10 kV Relays**

**Product Facts**

- 10 kV PC board-mount relay
- Vacuum dielectric for power switching low current loads
- Flying leads or PCB mount for high voltage connections
- Meets requirements of MIL-R-83725
- Completely sealed; suitable for test equipment
- Panel mount available for ease of mounting

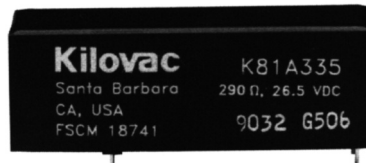

**Product Specifications**

**Contact Arrangement —**

K81A — SPST-NO  
K81B — SPST-NC

**Contact Form —**

K81A — A  
K81B — B

**Test Voltage, DC or 60 Hz (Peak) —**  
11 kV

**Rated Operating Voltage (Peak) —**  
DC or 60 Hz — 10 kV

**Continuous Carry Current, Max. —**  
DC or 60 Hz — 5 A, 20 A or 30 A 1  
Coil Hi-Pot (Vrms, 60 Hz) — N/A

**Contact Resistance, Max. —**  
0.03 ohm

**Operate Time, Max. —** 10 ms

**Release Time, Max. —** 10 ms

**Shock, 11ms, 1/2 Sine (Peak) —**  
30 g

**Vibration —**  
Peak — 10 g (55 to 500 Hz)

**Operating Ambient Temperature**

**Range —** -55°C to +85°C

**Mechanical Life**

— 2 million cycles

**Weight, Nominal —**

56.7 g (2 oz.)

**Notes:**

1. PC pin versions carry 5 or 20 Amps, see part number at right. Flying lead and panel versions carry 30 Amp.

\*Power terminal on 20 Amp version is a larger diameter than on the 5 Amp version (.025 = 5 Amp, .064 = 20 Amp)

**Coil Data**

Volts, Nominal DC	12 V	26.5 V	115 V
Pickup, Max.	8 Vdc	16 Vdc	80 Vdc
Dropout	.5-5 Vdc	1-10 Vdc	5-50 Vdc
Coil Resistance (±10%)	70 Ω	290 Ω	4700 Ω

Ratings listed are for 25°C, sea level conditions

**Ordering Information**

**Sample Part Number ▶**

**Series:** \_\_\_\_\_

**Contact Form:** \_\_\_\_\_

A = SPST-NO      B = SPST-NC

**Coil Voltage:** \_\_\_\_\_

2 = 12 Vdc, PC Board      3 = 26.5 Vdc, PC Board  
5 = 115 Vdc, PC Board

A = 12 Vdc, Stud Terminals, Panel Mount  
B = 26.5 Vdc, Stud Terminals, Panel Mount  
C = 115 Vdc, Stud Terminals, Panel Mount

**High Voltage Connections:** \_\_\_\_\_

A\* = PCB Solder Connection — 20 Amp  
3 = PCB Solder Connection — 5 Amp  
4 = Flying Leads      5 = Stud Terminals

**Mounting:** \_\_\_\_\_

5 = PC Board      7 = Panel Mount




**K81 A 3 3 5**

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

## K81C Series Make & Break Load Switching — 10 kV Relays

### Product Facts

- SPDT version of K81
- Vacuum dielectric for power switching low current loads
- Flying lead version will carry 10 Amps continuous current
- PCB mount version will carry 5 Amps continuous current

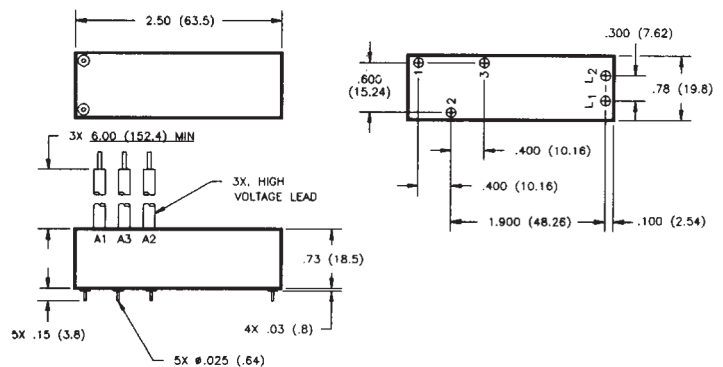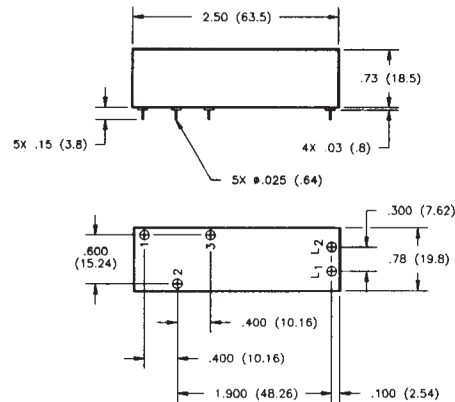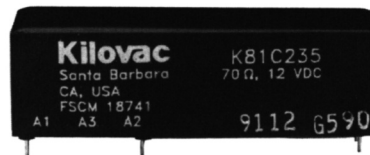

### Product Specifications

- Contact Arrangement** — SPDT  
**Contact Form** — C  
**Test Voltage, DC or 60 Hz (Peak)** — 11 kV  
**Rated Operating Voltage (Peak)** — DC or 60 Hz — 10 kV

- Continuous Carry Current, Max.** — DC or 60 Hz — See Note 1  
 Coil Hi-Pot (Vrms, 60 Hz) — N/A  
**Contact Resistance, Max.** — 0.05 ohm  
**Operate Time, Max.** — 10 ms  
**Release Time, Max.** — 10 ms

- Shock, 11ms, 1/2 Sine (Peak)** — 30 g  
**Vibration** — Peak — 10 g (55 to 500 Hz)  
**Operating Ambient Temperature Range** — -55°C to +85°C  
**Mechanical Life** — 2 million cycles  
**Weight, Nominal** — 70.87 g (2.5 oz.)


**Note:**  
 1. 5 Amp carry for PC pin versions.  
 30 Amp carry for flying lead versions.

### Coil Data

Volts, Nominal DC	12 V	26.5 V	115 V
Pickup, Max.	8 Vdc	16 Vdc	80 Vdc
Dropout	.5-5 Vdc	1-10 Vdc	5-50 Vdc
Coil Resistance (±10%)	70 Ω	290 Ω	4700 Ω

Ratings listed are for 25°C, sea level conditions

### Ordering Information

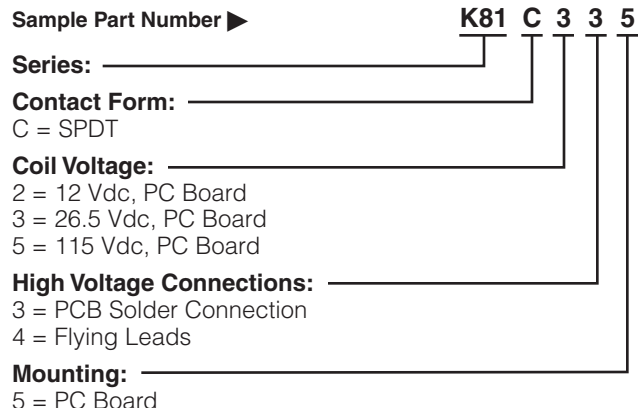

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#)