


KRPA Series Panel Plug-in Relay

- 5 to 10A current capability
- Contact arrangements of 1, 2 and 3 form C (CO)
- Octal type termination for quick installation
- Indicator lamp available on certain models

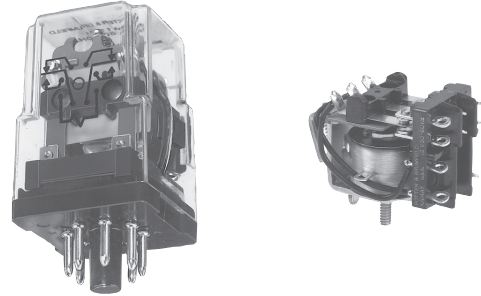

Typical applications
Baggage handling, lighting, inspection equipment, marine.

Approvals

UL E22575; CSA LR15734
Technical data of approved types on request.

Contact Data

| | | |
|-------------------------------|---|---------------|
| Contact arrangement | 1 form C (CO), 2 form C (CO), 3 form C (CO) | |
| Rated voltage | 240VAC | |
| Rated current | 10A | |
| Contact material | Ag | AgCdO |
| Min. recommended contact load | 100mA, 12VDC | 300mA, 12VDC |
| Frequency of operation | 360 ops./hour | 360 ops./hour |

Contact ratings

| Type | Load | Cycles |
|----------------------|----------------|-------------------------|
| UL 508 | | |
| KRPA, Ag | 5A, 120VAC | 100x10 ³ |
| | 3A, 240VAC | 100x10 ³ |
| | 1/10HP, 120VAC | 1x10 ³ |
| | 1/6HP, 240VAC | 1x10 ³ |
| KRPA, AgCdO | 10A, 240VAC | 100x10 ³ |
| | 1/3HP, 120VAC | 1x10 ³ |
| | 1/2HP, 240VAC | 1x10 ³ |
| KA, Ag | 5A, 120VAC | |
| | 3A, 240VAC | |
| | 1/10HP, 120VAC | |
| | 1/6HP, 240VAC | |
| KA, AgCdO | 10A, 120VAC | |
| | 6A, 240VAC | |
| | 1/6HP, 120VAC | |
| | 1/3HP, 240VAC | |
| Mechanical endurance | | 10x10 ⁶ ops. |

Coil Data

| | |
|-------------------------------------|----------------------------|
| Coil voltage range | 6 to 220VDC 6 to 240VAC |
| Coil insulation system according UL | Class B |

Coil versions, DC coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Coil resistance Ω±10% | Rated coil power W |
|-----------|-------------------|---|-----------------------|--------------------|
| 6 | 6 | 4.5 | 32 | 1.15 |
| 12 | 12 | 9.0 | 120 | 1.2 |
| 24 | 24 | 18.0 | 472 | 1.25 |
| 48 | 48 | 36.0 | 1800 | 1.3 |
| 110 | 110 | 82.5 | 10000 | 1.2 |
| - | 220 | Use 110V relay with 10KΩ, 5W resistor in series | | |

All figures are given for coil without preenergization, at ambient temperature +23°C.

Coil Data (continued)

Coil versions, AC coil

| Coil code | Rated voltage VAC | Operate voltage VAC | Coil resistance Ω±15% | Rated coil power VA |
|-----------|-------------------|---------------------|-----------------------|---------------------|
| 6 | 6 | 5.1 | 6 | 2.01 |
| 12 | 12 | 10.2 | 24 | 2.02 |
| 24 | 24 | 20.4 | 85 | 2.02 |
| 120 | 120 | 102.0 | 2250 | 2.1 |
| 240 | 240 | 204.0 | 9110 | 2.1 |

All figures are given for coil without preenergization, at ambient temperature +23°C.

Insulation Data

| | | |
|-------------------------------|--|---------------------------|
| Initial dielectric strength | | |
| between open contacts | | 1000V _{rms} |
| between contact and coil | | 1000V _{rms} |
| between adjacent contacts | | 1000V _{rms} |
| Initial insulation resistance | | |
| between insulated elements | | KRPA: 1000MΩ KA: 100MΩ |

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter

| | | |
|--------------------------------------|--|--|
| Ambient temperature | | |
| DC coil | | KRPA: -45°C to 70°C KA: -45°C to 85°C |
| AC coil | | KRPA: -45°C to 55°C KA: -45°C to 70°C |
| Category of environmental protection | | |
| IEC 61810 | | RT1 - dust protected KRPA and RTO - open style KA |
| Terminal type | | KRPA: 8- or 11-pin octal-type plug KA: solder terminals |
| Weight | | 85g |
| Packaging/unit | | tray/25 pcs., box/150pcs. |

Accessories

For details see datasheet Sockets and Accessories, KRPA Relays




| Product Code | Description |
|--------------|---|
| 27E891 | Two pole DIN socket (use 20C318 clip) |
| 27E892 | Three pole DIN socket (use 20C318 clip) |
| 27E122 | Two pole track mount socket (use 20C318 clip) |
| 27E123 | Three pole track mount socket (use 20C318 clip) |

KRPA Series Panel Plug-in Relay (Continued)

Dimensions

KRPA

KA

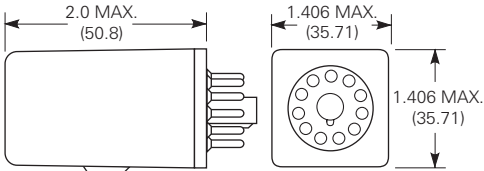

Terminal assignment

KRPA
1 form C







KRPA
2 form C

KRPA
3 form C

KA
1 form C

KA
2 form C

KA
3 form C



Product code structure

Typical product code **KRPA -5 A Y -120**

Type

KRPA Enclosed relay with octal-style plug
KA Open style relay with solder terminals

Contact arrangement and rating

5 1 form C (CO) **11** 2 form C (CO)
14 3 form C (CO)

Coil Input

A AC, 50/60Hz **D** DC

Contact material and indicator lamp option

Y Ag, no indicator lamp **G** AgCdO, no indicator lamp
N AgCdO, with indicator (Code N only available with relay type KRPA)

Options

Leave blank no additional options
F Au flashed contacts **P** Push to test button
(Options F and P only available with relay type KRPA)

Coil voltage

Coil code: please refer to coil versions table

KRPA Series Panel Plug-in Relay (Continued)

| Product Code | Arrangement | Contact Material | Coil | Option | Part Number | | |
|---------------|----------------|------------------|-----------|-------------|-------------|-------------|-------------|
| KA-5AG-120 | 1 form C, 1 CO | AgCdO | 120VAC | Open style | 7-1393099-1 | | |
| KA-5AY-120 | | Ag | | | 7-1393099-3 | | |
| KA-5DG-6 | | AgCdO | | | 6VDC | 7-1393099-9 | |
| KA-5DG-12 | | | | | 12VDC | 7-1393099-7 | |
| KA-5DG-110 | 2 form C, 2 CO | | 110VDC | | 7-1393099-6 | | |
| KA-11AG-120 | | | 120VAC | | 3-1393099-6 | | |
| KA-11AY-6 | | Ag | 6VAC | | 4-1393099-1 | | |
| KA-11AY-24 | | | 24VAC | | 4-1393099-0 | | |
| KA-11AY-120 | | | 120VAC | | 3-1393099-9 | | |
| KA-11DG-12 | | AgCdO | 12VDC | | 4-1393099-3 | | |
| KA-11DG-24 | | | 24VDC | | 4-1393099-5 | | |
| KA-11DG-110 | | | 110VDC | | 4-1393099-2 | | |
| KA-14AG-120 | | 3 form C, 3 CO | | 120VAC | | 5-1393099-0 | |
| KA-14AY-120 | | | Ag | | | 5-1393099-4 | |
| KA-14DG-24 | AgCdO | | 24VDC | | 5-1393099-7 | | |
| KA-14DG-110 | | | 110VDC | | 5-1393099-5 | | |
| KRPA-5AG-24 | 1 form C, 1 CO | | | 24VAC | None | 9-1393104-9 | |
| KRPA-5AG-120 | | | | 120VAC | | 9-1393104-8 | |
| KRPA-5DG-6 | | | 6VDC | 1393105-5 | | | |
| KRPA-5DG-12 | | | 12VDC | 1393105-3 | | | |
| KRPA-5DG-24 | | | 24VDC | 1393105-4 | | | |
| KRPA-5DY-12 | | Ag | 12VDC | | | 1393105-6 | |
| KRPA-5DY-24 | | | 24VDC | | | 1393105-7 | |
| KRPA-11AG-6 | | 2 form C, 2 CO | AgCdO | 6VAC | | | 2-1393104-8 |
| KRPA-11AG-12 | | | | 12VAC | | | 2-1393104-4 |
| KRPA-11AG-24 | | | | 24VAC | | | 1-1393105-2 |
| KRPA-11AG-120 | | | 120VAC | | 2-1393104-5 | | |
| KRPA-11AG-240 | | | 240VAC | | 2-1393104-7 | | |
| KRPA-11AN-12 | | | 12VAC | Indicator | 3-1393104-1 | | |
| KRPA-11AN-24 | | | 24VAC | | 3-1393104-3 | | |
| KRPA-11AN-120 | | | 120VAC | | 3-1393104-2 | | |
| KRPA-11AN-240 | | | 240VAC | | 3-1393104-4 | | |
| KRPA-11AY-6 | Ag | | AgCdO | 6VAC | None | 3-1393104-9 | |
| KRPA-11AY-12 | | 12VAC | | 3-1393104-5 | | | |
| KRPA-11AY-24 | | 24VAC | | 3-1393104-7 | | | |
| KRPA-11AY-120 | | 120VAC | | 3-1393104-6 | | | |
| KRPA-11AY-240 | | 240VAC | | 3-1393104-8 | | | |
| KRPA-11DG-6 | | | | 6VDC | | | 4-1393104-7 |
| KRPA-11DG-12 | | | | 12VDC | | | 4-1393104-3 |
| KRPA-11DG-24 | | | | 24VDC | | | 4-1393104-5 |
| KRPA-11DG-48 | | | | 48VDC | | | 4-1393104-6 |
| KRPA-11DG-110 | | | | 110VDC | | | 4-1393104-2 |
| KRPA-11DG-125 | | 125VDC | | 4-1393104-4 | | | |
| KRPA-11DG-24 | | 24VDC | | 4-1393104-5 | | | |
| KRPA-11DG-48 | | 48VDC | | 4-1393104-6 | | | |
| KRPA-11DN-12 | | 12VDC | Indicator | 5-1393104-0 | | | |
| KRPA-11DN-24 | | 24VDC | | 5-1393104-1 | | | |
| KRPA-11DN-110 | | 110VDC | | 4-1393104-9 | | | |
| KRPA-11DY-12 | Ag | AgCdO | 12VDC | None | 5-1393104-6 | | |
| KRPA-11DY-24 | | | 24VDC | | 5-1393104-7 | | |
| KRPA-14AG-12 | 3 form C, 3 CO | AgCdO | 12VAC | | 6-1393104-4 | | |
| KRPA-14AG-24 | | | 24VAC | | 6-1393104-7 | | |
| KRPA-14AG-120 | | | 120VAC | | 6-1393104-5 | | |
| KRPA-14AG-240 | | | 240VAC | | 6-1393104-8 | | |
| KRPA-14AN-24 | | | 24VAC | Indicator | 7-1393104-4 | | |
| KRPA-14AN-120 | | | 120VAC | | 7-1393104-3 | | |
| KRPA-14AN-240 | | | 240VAC | | 7-1393104-5 | | |
| KRPA-14AY-24 | | | Ag | AgCdO | 24VAC | None | 7-1393104-8 |
| KRPA-14AY-120 | | | | | 120VAC | | 7-1393104-7 |
| KRPA-14AY-240 | | | | | 240VAC | | 7-1393104-9 |
| KRPA-14DG-12 | AgCdO | AgCdO | 12VDC | | 8-1393104-2 | | |
| KRPA-14DG-24 | | | 24VDC | | 8-1393104-4 | | |
| KRPA-14DG-48 | | | 48VDC | | 8-1393104-5 | | |
| KRPA-14DG-110 | | | 110VDC | | 8-1393104-1 | | |
| KRPA-14DG-125 | | | 125VDC | | 8-1393104-3 | | |
| KRPA-14DN-24 | | | | 24VDC | Indicator | 9-1393104-0 | |
| KRPA-14DY-24 | | | Ag | | | None | 9-1393104-3 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)