


COIL: @ 25°C
 RESISTANCE _____ 1350 OHMS ± 10%
 NOMINAL VOLTAGE _____ 26.5 VDC
 MUST OPERATE _____ 13.5 VDC

 MUST RELEASE _____ 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C
 NOTES: _____ OPERATE & RELEASE 4 MS MAX.
 _____ BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

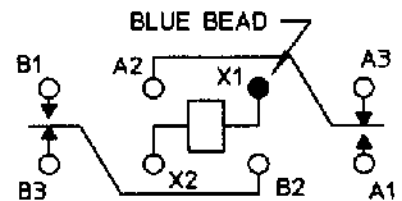

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. R.B. 8/25/97 CK.GgH 9/20/99



CUST. _____ OPL
 CUST. NO. M39016/13-060L REV. _____

'3SBC' RELAY

3SBC1506A2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[LZN4-US-DC12](#) [LZNQ4-US-DC24](#) [LZNQ4-US-DC48](#) [6-1393813-4](#) [6-1462039-0](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617529-6](#) [M39016/20-054M](#) [M39016/27-030M](#) [67RPCX-3](#) [MAHC-5494](#) [D3493L](#) [7-1393809-0](#) [7-1393813-3](#) [741B8](#) [7556072001](#) [MF-11AM-24](#) [MF1201N12](#) [MF-17A-24](#) [FBR244D012/02CP](#) [FBR244D024/02CS](#) [80.010.4522.1](#) [FL-4036](#) [FLH-11D-6](#) [831A7](#) [MMS124](#) [FTR-B4GA006Z](#) [FW1102S06](#) [FW1201S39](#) [FW1210S02](#) [FW1521S01](#) [FW5A1201S14](#) [9-1393813-6](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [G6E-184P-ST-US-DC48](#) [G6G234CDC24](#) [A07A939BZ1-0388](#) [A150-0005](#) [PZ-2A2420](#) [HB1-DC6V](#) [HB1-DC9V](#) [R10-14A10-240](#) [R10-14D10-12](#) [R10-5A10-120F](#) [R10-E1L8-S200](#) [R10-E2468-1](#) [R10-E4Z2-V700](#) [R10-T1L2N-115V](#)