

# MSD INC.

# ENGINEERING DATA SHEET

RELAY TYPE: FCB-405-0520M | COMPUTER PART No.: 9364519


TEST PROCEDURE

CUSTOMER/SPECIFICATION: M83536/5-020M | REV NONE

MSDP-790

### TEST REQUIREMENTS

COIL RES.:  $\pm 10\%$  400 OHMS OPERATE TIME: 6mS MAX RELEASE TIME: 6mS MAX  
 CONTACT MAKE BOUNCE: 1mS MAX N.O. BREAK BOUNCE: N/A  
 CONTACT STABILIZATION TIME: 2.5mS MAX RATED COIL VOLTAGE: 28 Vdc  
 CONTACT RES.: MFG TEST: .040 OHMS @ 10mA-6Vdc FINAL TEST: .050 OHMS @ 10mA-6Vdc  
 CONTACT VOLTAGE DROP: FINAL TEST: .100V MAX @ 5A-6Vdc  
 HI-POT: 1000 Vrms ALL POINTS  
 INSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 Vdc  
 VIBRATION: MIL-STD-202, METHOD 204 (30G'S/100-3000Hz)  
 SEAL TEST:  $1 \times 10^{-8}$  MAX LEAK RATE COIL TRANSIENT SUPPRESSION: N/A  
 OTHER: \_\_\_\_\_

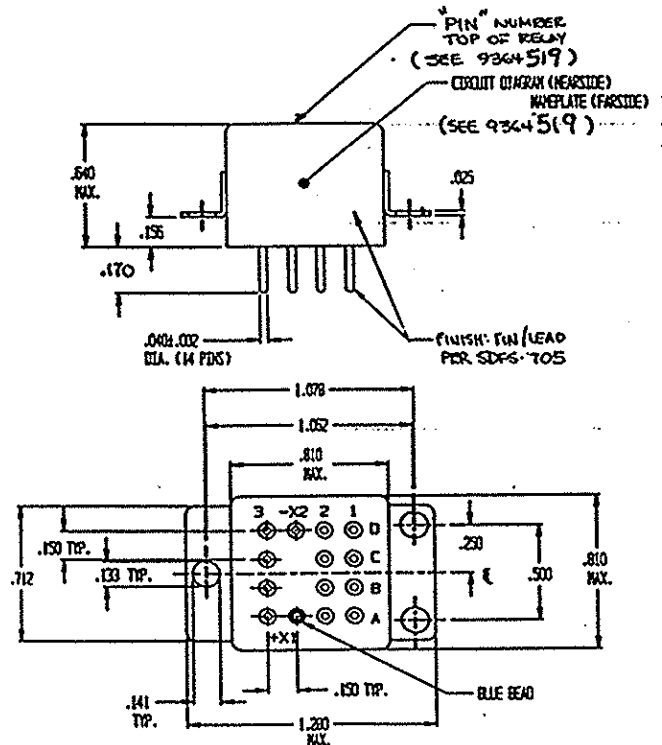

Prepared By: Date		Approved By: Date	
LES WYNNE 5-14-96		<i>[Signature]</i> 5-16-96	
Rev	ECN No.	Date	
A	96-065	5-14-96	

### SPECIAL INSTRUCTIONS

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)