


COIL: @ 25°C	
RESISTANCE	90 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.0 VDC
MUST RELEASE	0.3 VDC

CUSTOMER DATA SHEET

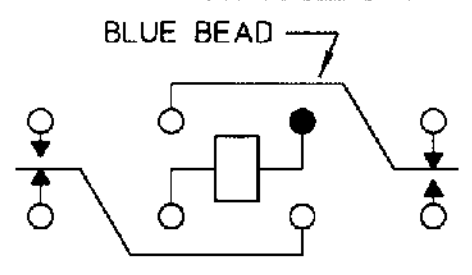

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6 ± 1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: LOW LEVEL TO
1 AMP 28 VDC RESISTIVE
100,000 OPERATIONS

NOTES: OPERATE & RELEASE TIME 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

DR. R.B. 9/7/95 CK. 9/11/95 *[Signature]*



CUST. C.I.I. STD.
 CUST. NO. _____

TYPE "MFW" RELAY

MFW1201G00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[6-1393813-4](#) [6-1462039-0](#) [617-12](#) [M39016/11-048P](#) [67RPCX-3](#) [7-1393809-0](#) [7-1393813-3](#) [7556072001](#) [80.010.4522.1](#) [FTR-B4GA006Z](#)
[FW1210S02](#) [9-1393813-6](#) [9-1617519-3](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [A-1.5W-K](#) [DF2E-L2-DC3V](#) [DS1EM24J](#) [DS1EM5J](#) [DS1ES5J](#) [DS4E-](#)
[M-DC5V-H48](#) [EC2-4.5TNJ](#) [EC2-9NJ](#) [B07B939BC1-0868](#) [1617076-5](#) [1617117-3](#) [1617137-2](#) [1617518-5](#) [1617560](#) [HMB1130K00](#)
[HMB1131S06](#) [HMS1119S01](#) [HMS1131S10](#) [HMS1201S03](#) [HMS1201S87](#) [HMS1205S02](#) [2-1393807-6](#) [2-1617071-2](#) [2-1617594-1](#) [JMGSC-](#)
[5LW](#) [K6-PS](#) [KHS-17D11-110](#) [9-1393761-0](#) [9-1617352-3](#) [9-1617583-1](#) [276XAXH-9D](#) [1617075-4](#) [1617139-2](#) [1617140-8](#) [1617354-6](#)