



MEAS STATOR RTD Temperature Sensor

- ◆ Variety of Configurations
- ◆ Single and Dual Elements
- ◆ Custom Designs Available with:
 - » Specific Dimensions
 - » Side Exit
 - » Paddle Style
 - » High Accuracy
 - » Special Cable or Leadwires

The Stator RTD Sensor is a rectangular, flat, laminated sensors commonly called “Stator Sticks” because they are inserted between the coils in the stator of a motor. These averaging type sensors are used in electric motors and generators for continuous sensing of the temperature and provide for consistent thermal monitoring without false alarms. Many sizes are in stock or we can customize for your application. Our Stator RTD sensors are built to meet the specifications of ANSI C50.10-1990, general requirements for synchronous motors. We can build to your specifications!

Features

- ◆ Rear Exit, Epoxy Glass Laminated
- ◆ Elements, Single and Dual:
 - » Platinum, Copper, Nickel
- ◆ Custom Body Thickness: .030” to .375”
 - » Standard: .030”, .050”, .078”, .093”, .125”
- ◆ Custom Body Widths: .250” to 2.50”
 - » Standard: .260”, .305”, .344”, .455”, .500”, .625”
- ◆ Leadwire/Cable Options

Applications

- ◆ Industrial
- ◆ Electric Motors
- ◆ Generators

MEAS STATOR RTD

Temperature Sensor

Performance Specifications

Dielectric Strength:

Class F: 3,000 volts RMS @ 60 Hz for 1 minute,
between leads and external body surface

Class H: 2,000 volts RMS @ 60 Hz for 1 minute,
between leads and external body surface

Temperature Limits:

Class F: 155°C (311°F)

Class H: 180°C (356°F)


RTD Leadwires:

Two Wire, Three Wire or Four Wire

Standard: Stranded Copper plated wire with PTFE insulation

Other leadwire coverings available

Dimensions

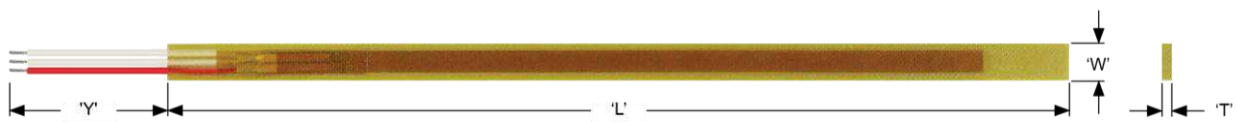

'L' = Body Length
'W' = Body Width
'T' = Body Thickness
'Y' = Leadwire/Cable Length

MEAS STATOR RTD

Temperature Sensor

Ordering Information

STATOR RTD SENSOR, REAR EXIT

Model	Classification	Temperature Limit	Material	Dielectric Strength
300F	Class F	155°C	Epoxy Glass	3,000 Volts
300H	Class H	180°C	Epoxy Glass	2,000 Volts

Model	Element	Accuracy	Temperature Coefficient
P2B	Platinum	100 Ohm \pm .12% at 0°C	.00385
P2C	Platinum	100 Ohm \pm .5% at 0°C	.00385
P2D	Platinum	100 Ohm \pm .2% at 0°C	.00385
G2C	Platinum	100 Ohm \pm .5% at 0°C	.00392
C1D	Copper	10 Ohm \pm .2% at 25°C	.00427
N3C	Nickel	120 Ohm \pm .5% at 0°C	.00672

Model 'L' Body Length

---- Define 'L' Length in Inches
Example: 10.00 = 10.00"; 6.25 = 6.25"

Model	Leadwires, Element Configuration	Color Code
2S	Two Wire, Single	Red/White
3S	Three Wire, Single	Red/White/White
4S	Four Wire, Single	Red/Red/White/White
3D	Three Wire, Dual	Red/White/White // Blue/Yellow/Yellow

Model	'T' Body Thickness	Standard Leadwires
A	.030"	30 AWG
B	.050"	26 AWG
C	.078"	22 AWG
D	.093"	22 AWG
E	.125"	22 AWG
F	.093"	22 AWG, Jacketed Cable
G	.125"	22 AWG, Jacketed Cable
H	.030"	26 AWG (0.050" Thick at Lead Exit)

Model 'Y' Leadwire/Cable Options

---- Define 'Y' Length in Whole Inches (120 = 120.0"; 036 = 36.0")

Model	'W' Body Width
A	.260" (Single Element Only)
B	.305" (Single Element Only)
C	.344" (Single Element Only)
D	.455" (Single Element Only)
E	.500"
F	.625"

STOCKED PART NUMBERS*

Part Number	Model Number
R-8203	300H C1D 10.00 3S H 180 A
R-8204	300H P2C 10.00 3S H 180 A
R-8205	300H N3C 10.00 3S H 180 A
R-7119	300H P2C 10.00 3S C 180 B
R-1802	300H C1D 10.00 3S C 036 B
R-8949-34	300F G2C 11.00 3S B 096 C
R-5156	300F G2C 12.00 3S B 096 C
R-7124	300H C1D 6.00 3S H 180 A
R-7123	300H N3C 6.00 3S H 180 A
R-10256-23	300H P2C 10.00 3D A 096 E

* Please consult factory for availability.

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
customercare.ando@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Tel: 800-440-5100
customercare.tlse@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
customercare.chdu@te.com

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Temperature Sensors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[590-59CN02-103](#) [HEL-705-U-0-12-C1](#) [HEL-736-U-2-36](#) [519-39AW09-245](#) [519-39CH01-295](#) [535-32AB36-202](#) [535-34AE08-303](#) [521-33AG04-303](#) [521-53BR01-503](#) [590-32AC34-103](#) [590-32AD05-103](#) [HEL-705-U-0-36-00](#) [HEL-705-U-1-12-C2](#) [LTPCTAA20MDSIEX01](#) [HEL-707-T-1-24-00](#) [HEL-716-U-0-24-00](#) [RP103ST22P2](#) [89750186](#) [20006233-00](#) [B57045K0682K000](#) [E52-CA6DN 1M](#) [R-10224-16](#) [R-1630](#) [R-8204](#) [R-8203](#) [B57500K103A1](#) [E52-CA1GTY 1M](#) [79696038](#) [79696039](#) [A1004TS43N1](#) [A1004TX43N1](#) [JS7352](#) [A-2102](#) [HRTS-5760-B-U-1-12](#) [89750190](#) [JI-F103WN-L301](#) [JI-F103WN-L252](#) [JI-103C1R2-L102](#) [JI-F103WN-L102](#) [JIC-F103WN-L301](#) [JIC-F103WN-L252](#) [JIC-F103WN-L102](#) [JIC-103C1R2-L301](#) [JIC-103C1R2-L252](#) [JIC-103C1R2-L102](#) [JI-103C1R2-L301](#) [JI-103C1R2-L252](#) [ITTUJ300A](#) [ITTUJ400A](#) [ITTUK200A](#)