


CUSTOMER DRAWING

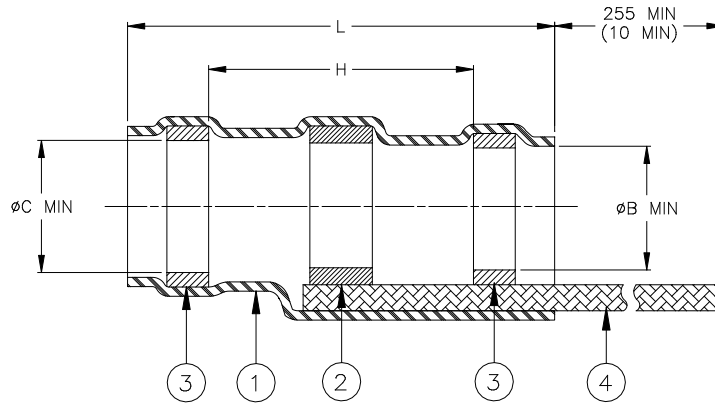

Product Name	Product Dimensions					Cable Dimensions		
	Ident. Code	L±1.75 (L±0.07)	Ø B min.	Ø C min.	H min.	Ø E max.	Ø F min.	Ø D max.
S03-06-R-100HN	S0306R	16.5 (0.650)	1.90 (0.075)	2.67 (0.105)	8.20 (0.323)	2.67 (0.105)	0.90 (0.035)	1.90 (0.075)
S03-07-R-100HN	S0307R	16.5 (0.650)	2.67 (0.105)	3.68 (0.145)	8.20 (0.323)	3.68 (0.145)	1.40 (0.055)	2.67 (0.105)
S03-08-R-100HN	S0308R	16.5 (0.650)	4.32 (0.170)	5.08 (0.200)	8.20 (0.323)	5.08 (0.195)	2.15 (0.085)	4.32 (0.170)
S03-09-R-100HN	S0309R	19.1 (0.750)	5.97 (0.235)	6.48 (0.255)	8.20 (0.323)	6.48 (0.255)	3.30 (0.130)	5.97 (0.235)
S03-10-R-100HN	S0310R	19.1 (0.750)	6.98 (0.275)	7.62 (0.300)	8.20 (0.323)	7.62 (0.300)	4.30 (0.170)	6.98 (0.275)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.
 THERMAL INDICATOR: Color change violet to colorless.
- MELTABLE RINGS: Stabilized thermoplastic. Color: blue.
- PRE-INSTALLED BRAID: Nickel plated copper strands per ASTM B355 Class 7. CMA 640.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed and having tin or silver plated shields and insulation compatible with the insert material. For compatible insulations, see MIL-S-83519/2 or consult TE Connectivity.
- When installed per Raychem process standard RCPS-100-70, assemblies will meet those requirements of Raychem Specification RT-1404 and MIL-S-83519/2 which do not require electrical testing while parts are immersed in water.
- Temperature range: -55°C to +150°C.
- Parts shall be marked with identification code per table.

For best results, prepare the cable as shown:

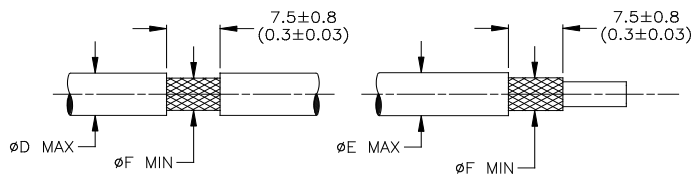

		Raychem THERMOFIT DEVICES	TITLE: SOLDERSLEEVE* DEVICE SHIELD TERMINATION WITH BRAID		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: S03-XX-R-100HN		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV : 2	DATE : 30-Mar-2020	
DRAWN BY: M. FORONDA	DATE: 12/03/99	ECO: ECO-20-004510	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#) [620026-000](#) [B-004-00](#) [140945-000](#) [NAS1744-3](#) [D-607-10](#)