

SAJ5 Series – Snap Action Switches

Applications

- Home
 Appliances
- Communication
 equipment
- Security
- Electronic equipment
- Printers

Features

- Sealed to IP67
- Solder Terminals or Quick Connect
- Highly reliable with long operating life.



TE Connectivity SAJ5 Series of Snap Action Switches offer flexibility through various combinations of contact ratings. These switches are designed to convert a mechanical action in an electrical one. This makes them very suitable for applications such as Home Appliances and Factory Automation as well as other domestic and industrial uses.

TE's Snap Action switches are dimensionally identical with other popular brands, making them extremely suitable for use in existing designs. They are available with various contact styles to aid flexibility

Specifications

Contact Rating0.1A at 48 VDC 0.1A at 125VAC, 250VACSAJ501Y3A at 12VDC 3A at 125VAC, 250VACSAJ53XYMechanical Durability500,000 cycles minElectrical Durability100,000 cycles min.Contact Resistance150mΩ max.Insulation Resistance100MΩ min. (500 VDC)Between terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ501Y SAJ501Y SAJ501Y shall be applied across terminals for 1 minute.Dielectric Strengthetween each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.Descrating Temperatureed0°C ~ ±85°C	SAJ5 Series		Rating
3A at 12VDC 3A at 125VAC, 250VACSAJ53XYMechanical Durability500,000 cycles minElectrical Durability100,000 cycles min.Contact Resistance150mΩ max.Insulation Resistance100MΩ min. (500 VDC)Between terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.	Contact Rating		SAJ501Y
Electrical Durability100,000 cycles min.Contact Resistance150mΩ max.Insulation Resistance100MΩ min. (500 VDC)Between terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 VSAJ501Y SAJ53XYDielectric StrengthAC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minuteSAJ501Y SAJ53XY			SAJ53XY
Contact Resistance150mΩ max.Insulation Resistance100MΩ min. (500 VDC)Between terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 VDielectric StrengthAC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.Between each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute	Mechanical Durability	500,000 cycles min	
Insulation Resistance100MΩ min. (500 VDC)Between terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ53XYDielectric StrengthAC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minuteSAJ501Y SAJ53XY	Electrical Durability	100,000 cycles min.	
Dielectric StrengthBetween terminals of the same polarity: 600 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ53XYDielectric StrengthAC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minuteSAJ501Y SAJ53XY	Contact Resistance	150mΩ max.	
V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ53XYDielectric StrengthAC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ53XYBetween each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute.SAJ501Y SAJ53XYBetween each terminal and n-current- carrying metal parts 1500V AC (50Hz or 60Hz) shall be applied across terminals for 1 minuteSAJ501Y SAJ53XY	Insulation Resistance	100MΩ min. (500 VDC)	
	Dielectric Strength	V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and ground: 1500 V AC (50Hz or 60Hz) shall be applied across terminals for 1 minute. Between each terminal and n-current-	
	Operating Temperature	shall be applied across terminals for 1 minute -40°C ~ +85°C	

2351463 Rev A


11/2019

Dimensions in millimetres unless otherwise specified Dimensions Shown for reference purposes only. Specifications subject to change


For Email, phone or live chat, go to: www.te.com/help



Circuit




How to Order

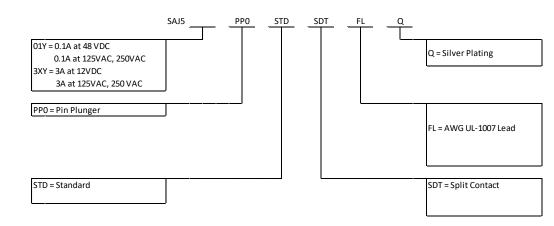

Mechanical Measurements

TE Smart Part Number: SAJ53YXPP0STDSDTFLQ

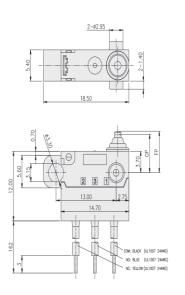

ITEM	SPEC.	
OPERATING FORCE(OF)	130gf (1.3N) MAX.	
RELEASE FORCE(RF)	13gf (0.13N) MIN.	
FREE POSITION(FP)	7.35mm MAX.	
OVERTRAVEL(OT)	(0.80mm)	
MOVEMENT DIFFERENTIAL(MD)	0.20mm MAX.	
OPERATING POSITION(OP)	6.40~6.95mm	

2351463 Rev A 11/2019 Dimensions in millimetres unless otherwise specified

Ø1.40

÷

Ũ

Dimensions Shown for reference purposes only. Specifications subject to change

For Email, phone or live chat, go to: www.te.com/help

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 5SM901-S12
 5SM9-S12N195
 602EN532
 602EN535-RB
 602HE5-RB1
 604HE162
 604HE223-6B
 624HE17-RB
 6HM82
 6HM89
 6SE1

 6SX1-H58
 70500216
 70599106
 71051
 MBH2731
 79211923
 79218589
 MIL30126AB6BBMD4A12XAU
 ML-1155
 ML-1376
 831010C3.0

 831090C2.EL
 83131904
 84212012
 8AS239
 8HM73-3
 8SX26-H33
 914CE1-6G
 PL-100
 11SM1077-H4
 11SM1077-H58
 11SM1-TN107

 11SM405
 11SM8423-H2
 11SX37-T
 11SX48-H58
 11SM2442-T
 11SM76-T
 11SM77-H58
 11SM76-T
 11SM863-T
 11SM866
 A831700C7.0

 121EN188-R
 1245.0120
 125EN56-RB
 D433V3RD
 1267.0101
 1267.7101