


## SCT

Flame-Retardant, Adhesive-Lined, Semirigid Polyolefin Tubing (Extended Temperature Range)

## **Product Facts**

- 4:1 shrink ratio allows a few sizes to cover a wide range of splice and component diameters
- Flame-retardant and mechanically tough, the tubing provides strain relief and abrasion protection of wire splices, terminals, and other components
- Thick adhesive liner forms an effective barrier against fluids and moisture and performs well at an extended temperature range
- RoHS compliant

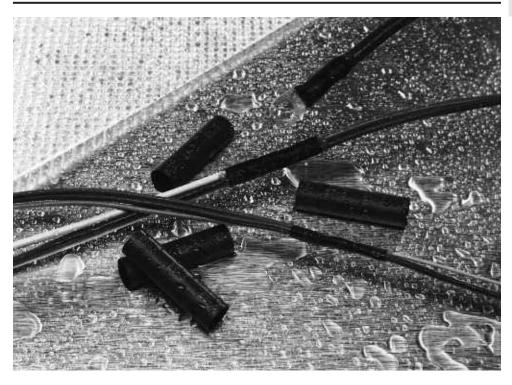

#### **Applications**

Specially designed to insulate and seal automotive wire splices and components in an under-the-hood automotive environment. Specially formulated to function at an extended temperature range.

#### Installation

Minimum shrink temperature: 110°C [230°F] Minimum full recovery temperature: 135°C [266°F]

#### **Operating Temperature Range**

-40°C to 150°C [-40°F to 302°F]

## Specifications/Approvals

Series	Raychem
SCT	SCT SCD

Available in:	Americas	Europe	Asia Pacific	



# **RAYCHEM Tubing Products**

# **SCT** (Continued)

## **Product Dimensions**

Inside Diameter		Recovered Wall Thickness*		
Part Number	Minimum Expanded as Supplied	Maximum Recovered After Heating	Total Wall After Heating	Meltable Wall After Heating (Nominal)
SCT No. 1	7.6 [0.300]	1.7 [0.065]	1.52 ± 0.30 [0.060 ± 0 .012]	0.76 [0.030]
SCT No. 2	9.0 [0.355]	2.3 [0.090]	1.52 ± 0.30 [0.060 ± 0 .012]	0.76 [0.030]
SCT No. 3	11.6 [0.455]	2.5 [0.100]	2.29 ± 0.30 [0.090 ± 0.012]	1.40 [0.055]
SCT No. 4	17.8 [0.700]	4.4 [0.175]	2.54 ± 0.30 [0.100 ± 0.012]	1.52 [0.060]

<sup>\*</sup>Wall thickness will be less if tubing recovery is restricted during shrinkage.

# **Ordering Information**

Color	Black
Size selection	Always order the largest size that will shrink snugly over the component being covered. Special order sizes are available upon request.
Standard packaging	Cut pieces.
Marking	Tubing will be printed with its numbered size (such as SCT-1, SCT-2, SCT-3, SCT-4).
Ordering description	Specify product name, numbered size, color and cut length (for example, SCT-NO.3-E3-0-75MM).

te.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

770-006S102 5685710001 CR6145-000 CR8248-000 CR9960-000 603312-4 607381P039 611112-000 617867N001 6500750004 CZ1420-000 D-306-38 770-003S106W2 770-005S105W1 770-005S106W1 770-007A303 770-010Y106W1 770-010Y706W1 7771210001 MFP-1/4"-Clear MFP-3/64"-Clear 790-3012 MFT-MT2000-NO.14-0-SP MHHT-4-15K2-G-104 MIL-LT-1-1/2-4-SP MIL-LT-1-1/2-9-STK MIL-LT-1/2-2-STK MIL-LT-3/0-SP MIL-LT-3/32-0-SP MIL-LT-3/32-6-SP MIL-LT-3/4-6-SP MIL-LT-3/8-0-SP 8159270001 839602-000 8423-6 FP301-116-6"-Black FP301-1/2-48"-Black FP301-12-48"-Black-Hdr FP301-1/4-48"-Black FP301-1/4-48"-White-Hdr FP301-18-48"-Black-Hdr FP301-1/8-6"-Black FP301-18-6"-Black FP301-316-48"-Blue-Hdr FP301-316-6"-Clear FP301-332-6"-Black 912229N002 120-126-16BL 121-001-09 121-018-32