


SPECIFICATION CONTROL DRAWING

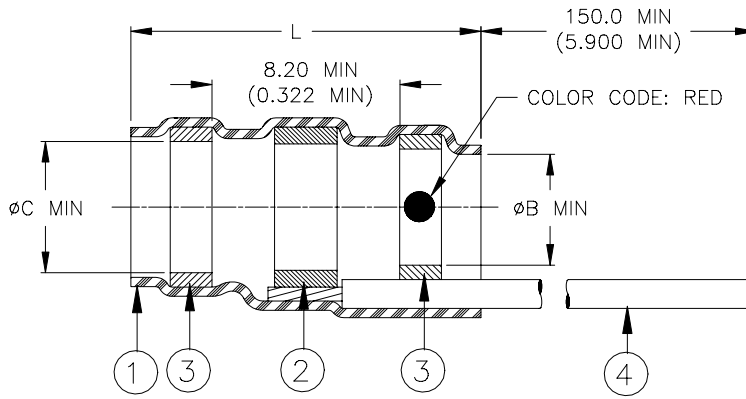

Product Revision		Ident Code	Product Dimensions			Cable Dimensions			
Product Name			L±1.75 (L±0.075)	øB min	øC min	øD max	øE max	øF min	øG min
SO175-1-55-22-95	A	SO1751R	16.50 (0.650)	1.90 (0.075)	2.67 (0.105)	1.90 (0.075)	2.67 (0.105)	0.90 (0.035)	0.50 (0.020)
SO175-2-55-22-95	A	SO1752R	16.50 (0.650)	2.67 (0.105)	3.68 (0.145)	2.67 (0.105)	3.68 (0.145)	1.40 (0.055)	0.75 (0.030)
SO175-3-55-22-95	A	SO1753R	16.50 (0.650)	4.32 (0.170)	5.08 (0.200)	4.32 (0.170)	5.08 (0.200)	2.15 (0.085)	1.25 (0.050)
SO175-4-55-22-95	A	SO1754R	19.10 (0.750)	5.97 (0.235)	6.48 (0.255)	5.97 (0.235)	6.48 (0.255)	3.30 (0.130)	1.80 (0.070)
SO175-5-55-22-95	A	SO1755R	19.10 (0.750)	6.98 (0.275)	7.62 (0.300)	6.98 (0.275)	7.62 (0.300)	4.30 (0.170)	2.50 (0.100)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
 - SOLDER: TYPE Sn96 per ANSI/J-STD-006.
 - FLUX: TYPE ROM1 per ANSI/J-STD-004.
 - THERMAL INDICATOR: Fusible ring, melt point: 232°C, completely melted at 240°C.
- MELTABLE RINGS: Environment resistant thermoplastic. Color: blue.
- PRE-INSTALLED LEAD: Raychem 55A0813-22-95 in accordance with MIL-W-22759/41-22-95 AWG22 stranded nickel-plated copper. Color: white with green stripe.

APPLICATION

- These parts are designed to provide an environment resistant shield termination on cables, rated for 150°C minimum, meeting the dimensional criteria listed, having nickel-plated shields and insulations compatible with the insert material. For compatible insulations, see MIL-S-83519/1 or consult Tyco Electronics/Raychem.
- When installed per Tyco Electronics/Raychem process standard RCPS-100-70, assemblies will meet performance requirement Raychem Specification RT-1404, MIL-S-83519, and 514.1920/99 Aerospatiale Matra Specification.
- Parts shall be marked with identification code per table.
- Temperature range: -55°C to +175°C.

For best results, prepare the cable as shown:

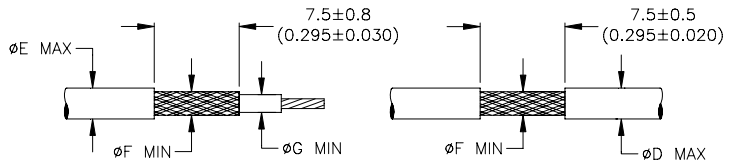

“G” is the minimum diameter on which the sleeve will seal.

		Raychem 305 Constitution Drive, Menlo Park, CA. 94025, USA		TITLE: SOLDERSLEEVE DEVICE SHIELD TERMINATION WITH LEADS, IMMERSION RESISTANT (175 °C, LEAD-FREE)					
				DOCUMENT NO.: SO175-X-55-22-95					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	
PREPARED BY: mforonda		REPLACES: D020142		DCR NUMBER: D030222		PROD. REV.: SEE TABLE		DOC. ISSUE: 1	
				SCALE: None		DATE: 25-Apr-03		SIZE: A	
						SHEET: 1 of 1			

If this document is printed it becomes uncontrolled. Check for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620069N003](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [CX0781-000](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [715325N001](#) [908357N001](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [E53797N001](#) [CB0213-000](#) [CB0219-000](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [325534-000](#) [CTA-0025](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [D-150-1011](#) [395947-000](#) [427243N001](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D44133N001](#) [LSS-26-8A](#)