SO63-4-00 - ACTIVE

## Raychem

TE Internal #: 359434-000 SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max) 150 °C, Expanded Inside Diameter (Min) .234 in [5.95 mm]

### View on TE.com >



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



## SolderSleeve Shield Terminator Product Type: Shield Terminator

Operating Temperature (Max): 150 °C

Expanded Inside Diameter (Min): 5.95 mm [.234 in]

Recovered Inside Diameter (Max): 1.78 mm [.07 in ]

Pre-Installed Lead: No

## Features

## **Product Type Features**

Splice Type	Shield Terminator
Temperature Indicator	Yes
Temperature Indicator Type	Fusible Ring

SolderSleeve Shield Terminator Product Typ	е
--	---

Shield Terminator

## **Configuration Features**

Pre-Installed Lead	No
Termination Features	
Termination Method	Solder
Dimensions	
Overall Length	19.1 mm[.75 in]
Dielectric Outside Diameter (Max)	1.8 mm[.07 in]
Shield Outside Diameter (Min)	3.3 mm[.13 in]
Jacket Outside Diameter	5.95 mm[.234 in]
Expanded Inside Diameter (Min)	5.95 mm[.234 in]
Recovered Inside Diameter (Max)	1.78 mm[.07 in]
Usage Conditions	
Operating Temperature (Max)	150 °C
Resistance Properties	Immersion Protection

**C** For support call+1 800 522 6752

## SO63-4-00

SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max) 150 °C, Expanded Inside Diameter (Min) .234 in [5.95 mm]



Wire Temperature (Max)	125 °C
Industry Standards	
MIL/NAS Specification (MIL-S-83519, NAS-1747)	No
Government Qualified	No
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Pb (37% in Solder) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Canability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**


## SO63-4-00

SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max) 150 °C, Expanded Inside Diameter (Min) .234 in [5.95 mm]





# Customers Also Bought

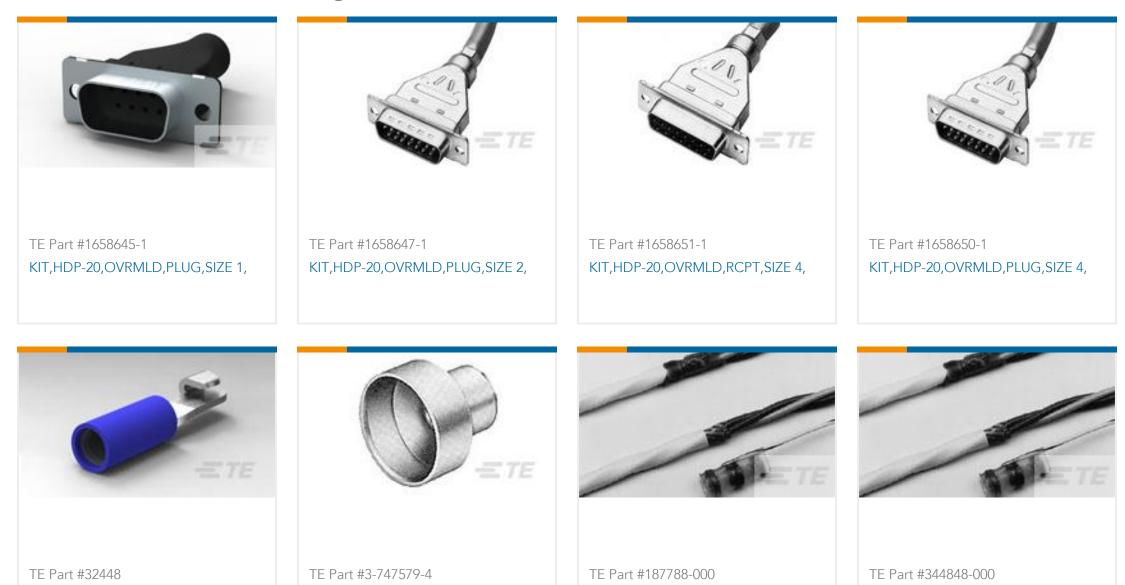



SHLDNG FERRULE, PLTD, BULK PKG



# Documents

Product Drawings SO63-4-00

English

Datasheets & Catalog Pages1654025\_Sec8\_B-155\_CWT\_SO63\_S01to03\_SO96EnglishRaychem Electrical Interconnect Products

English

**C** For support call+1 800 522 6752

## SO63-4-00

SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max) 150 °C, Expanded Inside Diameter (Min) .234 in [5.95 mm]



Product Specifications Product Specification

English

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solder Sleeves & Shield Tubing category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 899170-000
 620040N001
 620069N003
 CTA-0050-01
 629624-000
 6500750004
 6501390002
 CX0781-000
 696396-000
 697080-000
 D-150 

 0331CS2902
 D-181-1222-90/9CS2800
 D-300-01CS1108
 715325N001
 908357N001
 982127-1
 D-436-0182CS246
 D-436-37CS2651
 D-436 

 61CS246
 D-436-82-CS2621
 D-659-0087
 E53797N001
 CB0213-000
 CB0219-000
 S200-2-01
 S200-4-00CS2904
 LSS-81-16AA-CS5575

 ST18-2-00
 FLX40-020-04-CS8651
 325534-000
 CTA-0025
 D-108-07CS436
 D-128-0010
 D-141-0108CS404
 D-144-41CS1371
 D-150-0231 

 NRCS2896
 D-150-1011
 395947-000
 427243N001
 B-801-18-01
 515-9
 C67137-000
 CB0220-000
 D-436-0185CS1102
 D-436-36CS2908
 D 

 436-37CS2908
 D-436-52CS246
 D44133N001
 LSS-26-8A
 626168-000
 CB0220-000
 D-436-0185CS1102
 D-436-36CS2908
 D