

**Relay Package SNR**

- Relay package consisting of DIN-rail socket and relay
- 1 CO with 6 A rated load
- Module width only 6.2 mm
- Reduced system width for increased packing density on the DIN rail

**Approvals**

Relay: VDE Cert. No. 40010063, cULus E214025, cCSAus 2148326

Socket: VDE Cert. No. 40010063, cULus E224918

Technical data of approved types on request

For contact ratings see datasheet Slim interface Relay SNR

**Contact Data**

Contact configuration	1 CO	
Contact set	single contact	
Type of interruption	micro disconnection	
Rated voltage/max. switching voltage AC	240/400 VAC	
Rated current	6A	
Maximum breaking capacity AC	1500 VA	
Limiting breaking capacity, max. 4 s, duty factor 10%	10A	
Contact material	AgSnO <sub>2</sub>	AgSnO <sub>2</sub> gold plated
Minimum contact load	100mA, 12V	50mW
Rated frequency of operation with/without load	6 / 1200 min <sup>-1</sup>	
Operate/release time	max 12 / 5 ms	
Bounce time NO/NC contact	max 3 / 8 ms	

**Contact ratings**

For contact ratings see datasheet Slim interface Relay SNR

**Input data**

Rated input voltage DC	12, 24 VDC, 115, 230 VAC/VDC*)
Operative range to IEC 61810	2

\*) Version 115, 230 VAC/VDC equipped with 60 VDC relay

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
LB2	12	8.4	0.6	848	184
LC4	24	16.8	1.2	3390	220


**Coil versions, AC coil 50 Hz**

Coil code	Rated voltage VAC	Operate voltage 50 Hz VAC	Release voltage 50 Hz VAC	Coil resistance Ω	Rated coil power 50 Hz mVA
SM5	115	82.0	9.0	not applicable	403
TP0	230	160.0	15.0	not applicable	736

Other coil voltages on request.



F0260-BS

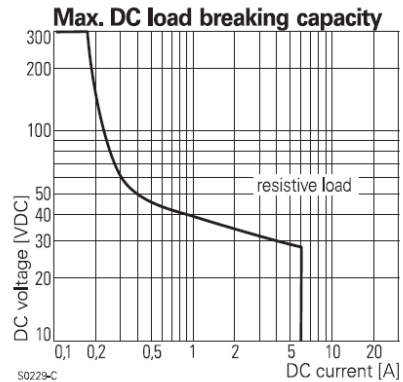



**Insulation**

<b>Dielectric strength</b>	
coil-contact circuit	4000V <sub>rms</sub>
open contact circuit	1000V <sub>rms</sub>
<b>Clearance /creepage coil-contact circuit</b>	
	≥ 6 / 8 mm
<b>Material group of insulation parts</b>	
	IIIa
<b>Insulation to IEC 60664-1</b>	
Type of insulation coil-contact circuit	reinforced
open contact circuit	micro disconnection
<b>Rated insulation voltage</b>	
	250 V
<b>Pollution degree</b>	
	3                      2
<b>Rated voltage system</b>	
	240 V                      230 / 400 V
<b>Overvoltage category</b>	
	III

**Relay Package SNR** (Continued)

**Other Data**

Mechanical endurance	10x10 <sup>6</sup> cycles
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customersupport/rohssupportcenter">www.te.com/customersupport/rohssupportcenter</a>	
Environment	
Ambient temperature range	-40...+55°C
Processing	
Terminals	screw
Terminal screw torque acc. IEC 61984	0.5 Nm
max.	0.6 Nm
Wire cross section	
single wire	0.14...2.5 mm <sup>2</sup>
fine wire	0.14...2.5 mm <sup>2</sup>
with bootlace crimp (DIN 46228/1)	0.14...2.5 mm <sup>2</sup>
Insertion cycles	A (10)
Max. Insertion Force total	100 N
Mounting distance	≥ 0 mm, dense packing of sockets
Weight	32 g
Packaging unit	10 pcs

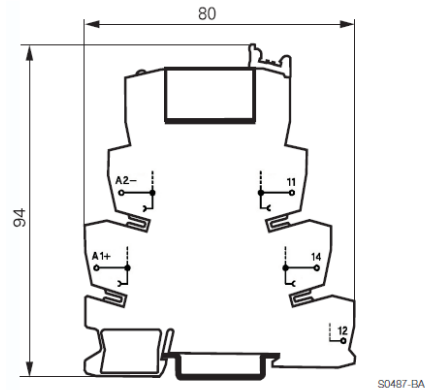

Version with screw terminals

**Accessories**

For accessories see datasheet [Accessories Slim Interface Relay SNR](#)

**Product code structure**

Typical product code **ST 3P 3 TP0**

<b>Type</b>	ST Relay Package SNR			
<b>Version</b>	3P Relay set, SNR 1-pole CO (1 form C), 6 A, screw terminals			
<b>Contact material</b>	2 AgSnO <sub>2</sub> , gold plated 3 AgSnO <sub>2</sub>			
<b>Coil</b>	LB2 12 VDC	LC4 24 VDC	SM5 115 VDC/VAC	TP0 230 VDC/VAC

Product code	Socket	Terminals	Relay	Contacts	Coil	Part Number
ST3P2LC4	ST3FLC4	screw	V23092-S1024-A201	AgSnO <sub>2</sub> gold pl.	24VDC	3-1416100-0
ST3P3LB2			V23092-S1012-A301	AgSnO <sub>2</sub>	12VDC	3-1416100-1
ST3P3LC4			V23092-S1024-A301		24VDC	3-1416100-2
ST3P3SM5	ST3FSM5		V23092-S1060-A301		115VDC/VAC	3-1416100-3
ST3P3TP0	ST3FTP0				230VDC/VAC	3-1416100-4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-325-159](#) [FCA-410-138](#) [8000-S3121](#) [8-1618273-6](#)  
[8-1618393-1](#) [GCA63A220VAC60HZ](#) [GCA63A277VAC60HZ](#) [GCA63A600VAC60HZ](#) [1-1672275-3](#) [1-1833005-4](#) [H-16/S1](#) [A711Z](#) [H-8C](#)  
[H-8/S11](#) [H-8/S68](#) [ACC530U20](#) [ACC730U30](#) [RF303ZM4-12](#) [DH18DA](#) [1423675-8](#) [AR4-15F13-C01](#) [AR7-41F11](#) [AVR907](#) [15732A200](#)  
[B07B032AC1-0329](#) [B329](#) [B490A](#) [1618279-1](#) [BHR124Y](#) [1810DDB-SX](#) [N417](#) [P30C42A12D1-120](#) [2-1617748-6](#) [2-1618375-1](#) [2-1618396-6](#)  
[2-1618398-1](#) [JMAPD-5XL](#) [JMGACD-5M](#) [JMGSC-5LW](#) [JMGSCD-5L](#) [PBO-18A1218](#) [PBO-40A3040](#) [K8DSPH1200480VAC](#) [KA-3C-12A](#)