


Specification Control Drawing

Page 2 is for internal use only

WIRE, ELECTRIC, RADIATION CROSSLINKED POLYOLEFIN INSULATED, TIN COATED COPPER,
600/1000 VOLT , 125°C

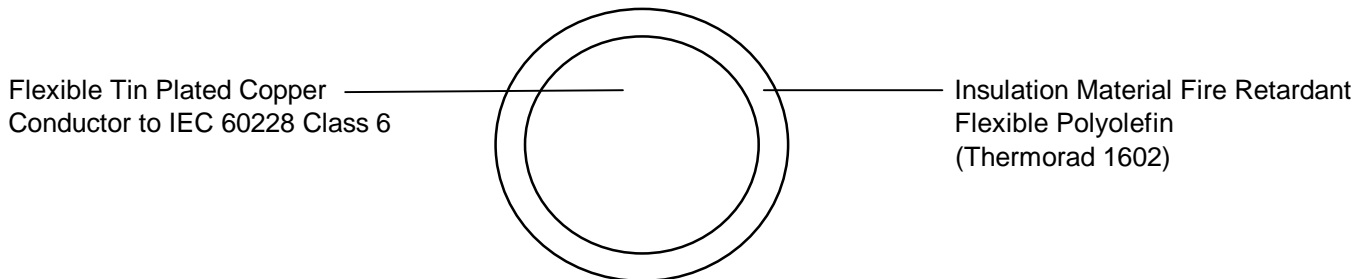

Part Description	Conductor				Finished Cable		
	Nominal Conductor Size (mm ²)	Number of Strands	Maximum Strand Diameter (mm)	Outside Diameter (mm)	Maximum Resistance (Ohms/km)	Outside Diameter (mm)	Nominal Weight (kg/km)
TR16-1.5-*	1.5	85	0.16	1.55 ± 0.15	12.80	3.00 ± 0.20	20
TR16-2.5-*	2.5	7 × 20	0.16	2.40 ± 0.20	7.76	3.90 ± 0.20	32
TR16-4.0-*	4.0	7 × 33	0.16	2.90 ± 0.25	4.76	4.50 ± 0.25	48
TR16-6.0-*	6.0	7 × 27	0.21	3.60 ± 0.25	3.23	5.20 ± 0.25	69
TR16-10.0-*	10.0	19 × 17	0.21	4.55 ± 0.25	1.88	6.20 ± 0.30	111
TR16-16.0-*	16.0	19 × 27	0.21	5.50 ± 0.30	1.19	7.40 ± 0.30	173
TR16-25.0-*	25.0	37 × 21	0.21	7.30 ± 0.40	0.78	9.30 ± 0.30	261
TR16-35.0-*	35.0	37 × 30	0.21	8.55 ± 0.45	0.552	10.60 ± 0.30	365
TR16-50.0-*	50.0	37 × 19	0.31	10.15 ± 0.55	0.387	12.45 ± 0.35	516
TR16-70.0-*	70.0	37 × 27	0.31	12.00 ± 0.60	0.272	14.55 ± 0.35	728
TR16-95.0-*	95.0	37 × 36	0.31	14.05 ± 0.75	0.204	17.00 ± 0.40	971
TR16-120.0-*	120.0	37 × 46	0.31	16.30 ± 0.80	0.159	19.40 ± 0.50	1364

COLOUR CODE: The '*' in the part description shall be replaced with colour code designator in accordance with Mil Stan 681.

PERFORMANCE REQUIREMENTS: To be tested to and meet the requirements of the issue in effect of Raychem Specification WCD 51/1602 where applicable and additional electrical testing as follows:

Routine Spark Test to issue in effect of BS 5099

Conductor size (mm ²)	Test voltage (a.c. [rms] kV)
1.5-10	6
16-50	7
70-95	9
50.0-120	10

APPROVAL: Electronic sign off - no signatures will appear.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hook-up Wire](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[8918-BRN-1000](#) [8920-DK-BLU-1000](#) [CR6328-000](#) [01776.38.01](#) [M22759/16-14-5-500FT](#) [7053-RED-1000](#) [7053-SLATE-1000](#) [F25935-000](#)
[F60898-000](#) [8055](#) [81044/12-18-9CS3209](#) [82A0811-4-9-G110](#) [83004-ORG-1000](#) [83005-LT-BLU-1000](#) [83025-VIO-1000](#) [8523-RED-100](#)
[8524-WHT-100](#) [8525-ORG-1000](#) [8530-BLK-1000](#) [8530-LT-BLU-100](#) [8538-009-1000](#) [8597-LT-BLU-100](#) [8898-BLK-100](#) [138498-000](#)
[E76065-000](#) [EPD50886A-20-9](#) [BFWUL3239-24-PINK](#) [C2015A.12.04](#) [C2015A.12.05](#) [C2015A.12.08](#) [C2015A.12.10](#) [C2015A.12.19](#)
[C2016A.12.05](#) [C2016A.12.07](#) [C2065A.12.02](#) [C77653-000](#) [220368-001](#) [8916-GRY-500](#) [8918-RED-100](#) [8919-DK-BLU-1000](#) [8919-YEL-100](#)
[8920-YEL-100](#) [9242833001](#) [933205-000](#) [2841/7-YELLOW-1000](#) [2842/7-ORANGE-100](#) [2842/7-RED-1000](#) [2843/19-BLUE-100](#) [2843/1-](#)
[YELLOW-100](#) [2843/7-GREEN-100](#)