## TXR40AC00-1204AI ACTIVE



Raychem | Raychem TXR

TE Internal #: 883337-000

Raychem TXR, Ruggedized Backshells & Adapters

View on TE.com >



Connectors > Connector Backshells & Adapters > Ruggedized Backshells & Adapters



Connector General Specification Number: MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL-

DTL-38999 Series IV/Class C,W, MIL-DTL-38999 Series IV/Class F,W

Backshell Material: Aluminum

Adapter Plating Material: Electroless Nickel (AMS-C-26074)

Cable Diameter Range: 3.2 – 5.1 mm [ .125 – .2 in ]

Adapter Angle: Straight

### **Features**

### **Product Type Features**

Termination Device Included	TR04AI
Pluggable I/O Accessory Type	Tinel-Lock Adapter
Adapter Angle	Straight
Termination Device Type	Side-Entry Tinel-Lock Ring, Tinel-Lock Adapter, Tinel-Lock Ring
Connector Shell Size	13, C

## **Body Features**

Color	Bright
Backshell Material	Aluminum
Adapter Plating Material	Electroless Nickel (AMS-C-26074)
TE Adapter Code	40
Adapter Entry Size	4

## **Termination Features**

Overbraid Termination	Tinel-Lock Ring	
-----------------------	-----------------	--

### **Dimensions**

Cable Entry Diameter	.2 – 6.4 mm[.01 – .25 in]
Cable Diameter Range	3.2 – 5.1 mm[.125 – .2 in]

## **Usage Conditions**



Salt Spray Resistance	48 Hr
Operating Temperature Range	-65 – 200 °C[-85 – 392 °F]
Industry Standards	
Connector Detail Specification Number	D38999/20, D38999/24, D38999/26, D38999/40, D38999/42, D38999/46, D38999/47
Other	
Connector General Specification Number	MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL- DTL-38999 Series IV/Class C,W, MIL-DTL- 38999 Series IV/Class F,W

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Pb (.3% in BODY & NUT) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



# Compatible Parts



# Also in the Series | Raychem TXR

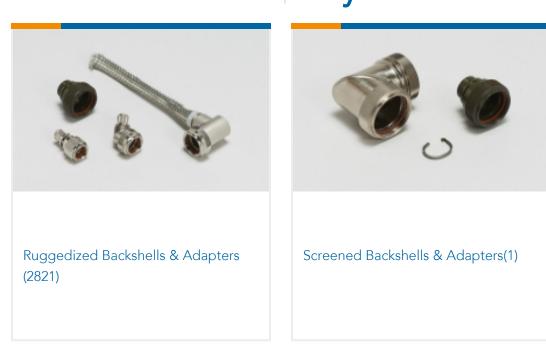

# Customers Also Bought

















## **Documents**

Product Drawings
TXR40AC00-1204AI

English

**CAD Files** 



3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_883337-000\_O.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_883337-000\_O.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_883337-000\_O.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

## Datasheets & Catalog Pages

5-1654025-5\_sec6\_Adapters

English

Circular Backshells

English

### **Product Specifications**

General Information Package for Tinel-Lock Adapters

English

Braid termination using a Tinel Lock Ring installed using a resistance heater.

French

Braid termination using a Tinel Lock Ring installed using a resistance heater.

English

PERFORMANCE SPECIFICATION Tinel-Lock Rings, Heat Recoverable for Braid Termination

English

ASSEMBLY GUIDE for Tinel -Lock Rings, Heat Recoverable for Braid Temination

English

**Instruction Sheets** 

Instruction Sheet (U.S.)

English

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular MIL Spec Strain Reliefs & Adapters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

896227-000 899170S004 0113-023-000 6000-063-0022 CS6624-000 620AB038Z136 620AS001Z108 620AS038Z112 620AS038Z120 620AS038Z132 620FB038NF08 620HA038NF09 620HA038NF11 620HA038NF13 620HA038NF25 620HB049NF17 620HS038NF11 620HS038Z121 620HS042XM19 620HS042XM25 620HS048B17 620MS064NF12 620MS065Z107 620MS065ZNU06 627-123NF21-11 627-125NF23-6 630J041M06H 630J041M20H 637S010NF0212H 637S010NF0416A 640830-000 659943-000 66241-10A CW0597-000 CW0598-000 CW0948-000 CY0122-000 M85049/41-6A W/B M85049/42-12DS M85049/47N8 M85049/51-1-14S M85049/51S16S M85049/60-1N16 M85049/60-2G12W M85049/69-11N CZ3661-000 D02922-000 70.360.1628.0 703797-000 705825-000