


## CUSTOMER DRAWING

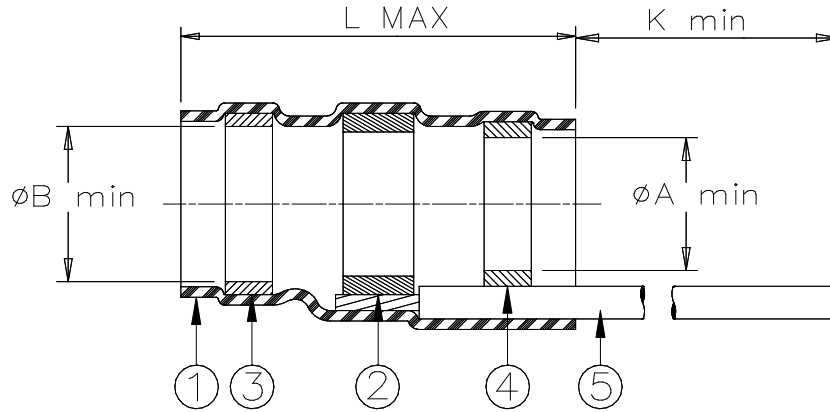

Product Name	Product Dimensions				Cable Dimensions				
	L max	A min	B min	K min	øD max	øE min	øF min	øG max	J±0.5 (J±0.02)
W-063-06	16.4 (0.645)	2.6 (0.100)	3.1 (0.120)	150 (5.900)	2.6 (0.100)	1.6 (0.070)	1.5 (0.060)	3.1 (0.100)	7 (0.275)
W-063-07	16.4 (0.645)	4.4 (0.175)	4.9 (0.195)	150 (5.900)	4.4 (0.175)	2.2 (0.095)	2.1 (0.090)	4.9 (0.193)	7 (0.275)
W-063-08	19.9 (0.780)	6.9 (0.270)	7.4 (0.295)	150 (5.900)	6.9 (0.270)	3.4 (0.140)	3.2 (0.125)	7.4 (0.295)	7 (0.275)


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Cd18 per ANSI J-STD-006.  
 FLUX: TYPE ROL0 per ANSI-J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic. Color: blue.
4. MELTABLE RING: Thermally stabilized thermoplastic. Color: clear.
5. GROUND LEAD: 55A0111-20 in accordance with MIL-W-22759/32 AWG20 stranded tin plated copper. Color: green.


### APPLICATION

1. These parts are designed to provide an environment protected shield termination on cables, rated for 105°C minimum, meeting the dimensional criteria listed, having tin or silver plated shields
2. Temperature range: -55°C to +125°C.  
 Install using TE Connectivity-approved convection or infrared heating tools in accordance with Raychem process standard RCPS-100-70.

For best results, prepare the cable as shown:

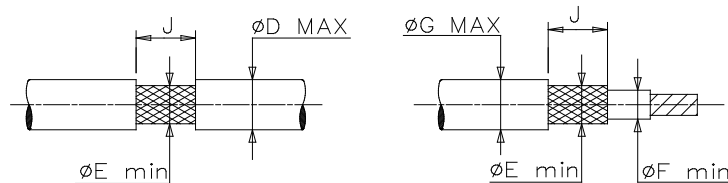

TE Connectivity, TE connectivity (logo), Raychem, Thermofit, and SolderSleeve are trademarks

		<b>Raychem</b> THERMOFIT DEVICES		TITLE: <b>SOLDERSLEEVE DEVICE WITH PRE-INSTALLED LEAD LOW TEMPERATURE</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>W-063-0X</b>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision: <b>4</b>	Issue Date: March 2020
DRAWN BY: M. FORONDA	DATE: 06/17/98	ECO: ECO-20-003573	SCALE: None	SIZE: A	SHEET: 1 of 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620069N003](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [CX0781-000](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [715325N001](#) [908357N001](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [E53797N001](#) [CB0213-000](#) [CB0219-000](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [325534-000](#) [CTA-0025](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [D-150-1011](#) [395947-000](#) [427243N001](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D44133N001](#) [LSS-26-8A](#) [626168-000](#)