

Part Number	Description
G24R12-06	12A, 280 Vac
G24D12-06	12A, 280 Vac

Part Number Explanation

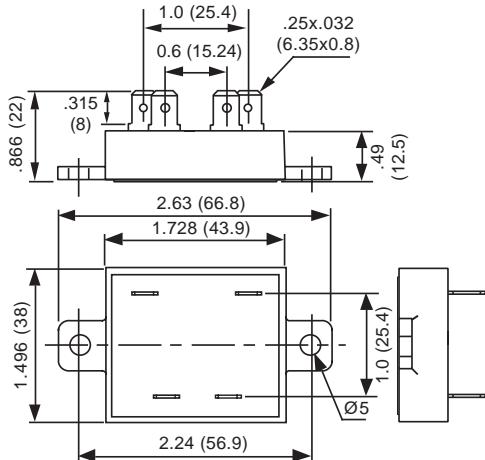
G	24	R	12	-06
Series				
Line Voltage ¹		Switch Type ²	Feature ³	
Output Current - Amps				

NOTES


1) Line Voltage (nominal): 24 = 240 Vac

2) Switch Type: R = Random turn-on; D = Zero-cross turn-on

3) Feature: -06 = Faston terminals

MECHANICAL SPECIFICATION

Figure 1 — G relays: dimensions in inches (mm)
INPUT (CONTROL) SPECIFICATION

	Min	Max	Units
Control Range			
G24R	3	32	Vdc
G24D	4	32	Vdc
Input Current Range			
G24R	2	30.5	mAdc
G24D	3	30.5	mAdc
Must Turn-Off Voltage			
	1		Vdc
Input Resistance (Typical)			
	1000		Ohms
Reverse Voltage Protection			
	32		V


FEATURES/BENEFITS

- Miniature size package
- Power and control connections by Faston terminals
- Internal VDR protection
- Excellent thermal performance
- High immunity to surges

DESCRIPTION

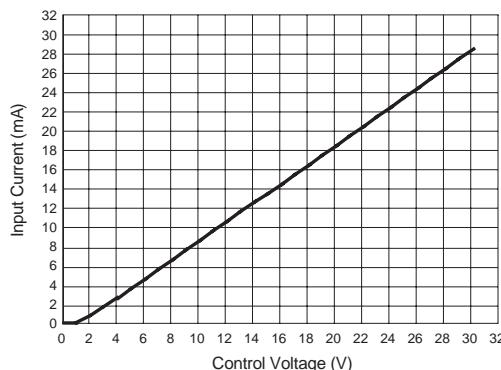
The Series G relays are designed for medium-power loads. The design incorporates a thyristor output. The Series G relays utilize optical isolation to protect the control from load transients. An internal MOV is also provided to protect against transient voltages. Its compact size makes it ideal for designs where space is limited.

APPLICATIONS

- Heating control
- Motor control
- Light dimmers
- Industrial and process control
- On/Off controls of medium-power AC equipment

APPROVALS

UL pending.

CONTROL CHARACTERISTIC

Figure 2 — G relays

OUTPUT (LOAD) SPECIFICATION

	Min	Max	Units
Operating Range (See Note 1)	12	320	Vrms
MOV Clamping Voltage @ 1mA	520		V
Output Current Range	.001	12	Arms

Maximum Surge Current Rating (Non-Repetitive)

See Figure 4 260 A

On-State Voltage Drop $0.75(I_e) + 0.02(I_e)^2$ V

Zero-Cross Window (Typical)

G24R	R	NA
G24D	D	±12 Vac

Off-State Leakage Current (60Hz) 0.1 mA

Turn-On Time (60 Hz)

FS24R	0.1	ms
FS24D	8.3	ms

Turn-Off Time (60 Hz) 8.3 ms

Off-State dv/dt 500 V/μs

Maximum di/dt (Non-Repetitive) 50 A/μs

Operating Frequency Range 0.1 Hz

I²t for Match Fusing (<8.3ms) 340 A²S

Thermal Resistance Junction to Case 5.6 °C/W

ENVIRONMENTAL SPECIFICATION

	Min	Max	Units
Operating Temperature	-40	100	°C
Storage Temperature	-40	100	°C
Input-Output Isolation	4000		Vrms
Output-Case Isolation	4000		Vrms
Rated Impulse Voltage	4000		Vi

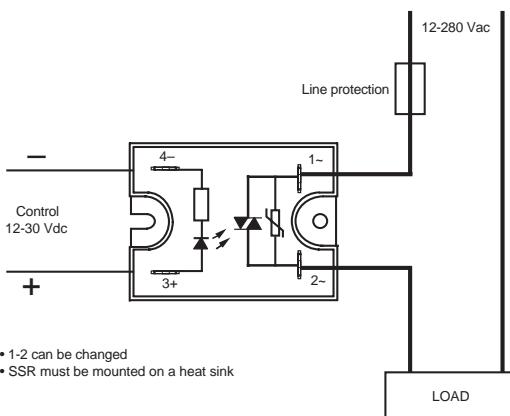
TYPICAL APPLICATION


Figure 3 — G relays

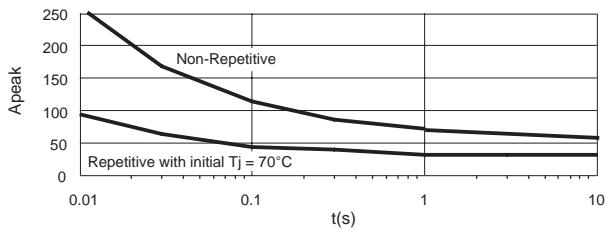
SURGE CURRENT


Figure 4 — G relays output current

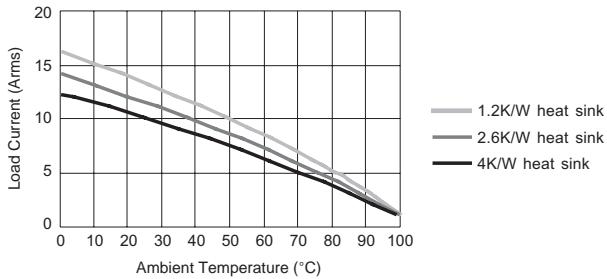
THERMAL CHARACTERISTICS


Figure 5 — G relays output current

NOTES:

1. Maximum voltage limited by MOV.
2. Electrical specifications at 25°C unless otherwise specified.
3. For 800Hz applications, contact factory.
4. For additional/custom options, contact factory.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solid State Relays - Industrial Mount category:

Click to view products by Teledyne manufacturer:

Other Similar products are found below :

[D2440-C](#) [H10CA4890](#) [D4875C](#) [D53TP50DH-10](#) [1395831-1](#) [1616010-6](#) [BR312BY](#) [A-1326](#) [H10CA4850](#) [H12CA4890VL](#) [RA2410-D06](#)
[RA2410HA06T](#) [D1202F](#) [D53TP50-10](#) [W230E-1-12](#) [W230T-3-12](#) [1-1617030-3](#) [1-1617033-7](#) [MS2-D2420](#) [MS2-D2430](#) [A-1440](#)
[RJ1P60V50E](#) [HS501DR-D2425](#) [RN1F48I50](#) [70.362.1028.0](#) [7-1393030-8](#) [Z5.509.0828.0](#) [G3DZ-4B DC24](#) [G3DZ-F4B DC12](#) [SSRDAC10](#)
[RV8S-L-A240-D24](#) [RV8S-L-A240-D6](#) [RV8S-S-A240-D24](#) [RV8S-S-A240-D6](#) [RV8S-S-A240Z-D24](#) [RV8S-S-D24-A240](#) [RV8S-S-D48-A120](#)
[RN1F12V50](#) [RJ1P60I30E](#) [RJ1P60V30E](#) [SO967860](#) [SMT8628521](#) [SO869970](#) [SOD867180](#) [SAL961360](#) [SO867970](#) [SOB863860](#)
[SOB867640](#) [SOB942360](#) [G3PH-5150B DC5-24](#)