

T3AFG Function / Arbitrary Waveform Generator Data Sheet

Debug with Confidence

5 MHz – 120 MHz

Teledyne Test Tools T3AFG range of generators are a series of single and dual-channel function/arbitrary waveform generators with specifications of up to 120 MHz maximum bandwidth, 1.2GSa/s maximum sampling rate and 14 or 16-bit vertical resolution. The proprietary TrueArb & EasyPulse techniques used on the higher bandwidth models helps to solve the weaknesses inherent in traditional DDS generators when generating arbitrary, square and pulse waveforms. With advantages above the T3AFG generators can provide users with a variety of high fidelity and low jitter signals, which can meet the growing requirements of complex and extensive applications.



Tools for Improved Debugging


- **Deep Memory** – up to 8 Mpts/Ch on 40 MHz to 120 MHz models. 16 kpts on 5 MHz and 10 MHz models.
 - **Wide Range of Modulation Types** – AM, DSB-AM, FM, PM, FSK, ASK, PWM, Sweep, Burst, and PSK on 2 Ch models.
 - **High Resolution** – 14 Bit on 5 MHz and 10 MHz models, 16 bit on 40 MHz to 120 MHz models.
 - **Bandwidth Models up to 120 MHz**
 - **Built In Arbitrary Waveforms**
 - **User Defined Waveforms**

- ✔ **Generate complex arbitrary waveforms.**
 - ✔ **Quickly set up modulated waveforms.**
 - ✔ **Generate waveforms with low noise and spurious signal content.**
 - ✔ **Wide choice of bandwidths.**
 - ✔ **Load and replay built in Arbitrary Waveforms.**
 - ✔ **Store and recall user defined waveforms.**


Key Specifications

Bandwidth	5 MHz, 10 MHz, 40 MHz, 80 MHz, 120 MHz
Channels	1 and 2 Channel Models
Memory	16 kpts / Ch, 8 Mpts / Ch
Sample Rate	up to 1.2 GS/s
Display	3.5" – 4.3"
Connectivity	USB Host, USB Device, LAN


T3AFG FUNCTION / ARBITRARY WAVEFORM GENERATOR

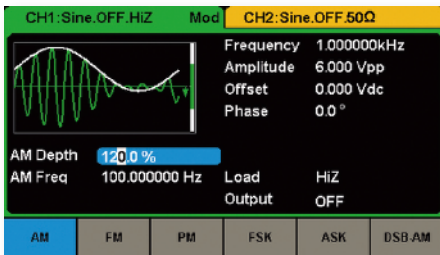

The T3AFG range of Function / Arbitrary Waveform Generators support a wide range of modulation types.

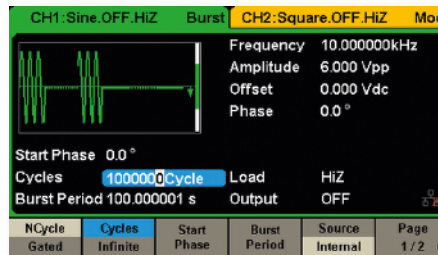

Burst mode supports 'N Cycle' and 'Gated' modes with the Burst source being configured as 'Internal', 'External' or 'Manual'.

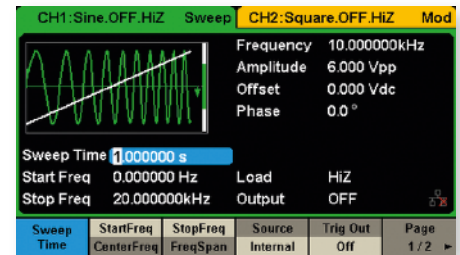

Sweep mode supports 'Linear' and 'Log' sweep, with 'Up' and 'Down' direction, and Sweep source being configured as 'Internal', 'External' or 'Manual'.

Ordering Information

Model	Bandwidth	Channel	Memory per Ch	Sample Rate per Ch
T3AFG5	5 MHz	1	16 kpts	125 MS/s
T3AFG10	10 MHz	1	16 kpts	125 MS/s
T3AFG40	40 MHz	2	8 Mpts	1.2 GS/s
T3AFG80	80 MHz	2	8 Mpts	1.2 GS/s
T3AFG120	120 MHz	2	8 Mpts	1.2 GS/s

Function	T3AFG5, T3AFG10	T3AFG40, T3AFG80, T3AFG120
Built-in Waveforms	5 Standard, 46 Arbitrary	5 Standard, 196 Arbitrary
Input/Output	1 Waveform Output, Synchronous Signal Out, External Trigger In	2 Waveform Outputs, Counter Input, Aux In/Out, 10 MHz Clock In/Out
Modulation Functions	AM, DSB-AM, FM, PM, FSK, ASK, PWM, Sweep, Burst	AM, DSB-AM, FM, PM, FSK, ASK, PSK, PWM, Sweep, Burst, Harmonic
TrueArb and EasyPulse	No	Yes
Maximum Amplitude Output	10 Vpp at 50 Ohms, 20 Vpp at HiZ	< 20 MHz: 10 Vpp at 50 Ohms, 20 Vpp at HiZ > 20 MHz: 5 Vpp at 50 Ohms, 10 Vpp at HiZ
Vertical D/A Resolution	14 Bits	16 Bits
Display Size	3.5" TFT-LCD	4.3" Touch Screen

Excellent Performance

- Bandwidths from 5 MHz to 120 MHz
- 1 or 2 Channel Models
- Up to 8 Mpts/Channel memory

Great Connectivity

- USB host port for mass storage
- USB device port (USBTMC)
- LAN port on 2 channel models

Smart Capabilities

- Sweep output carrier can be Sine, Square, Triangle and Arbitrary waveforms
- Burst output under internal or external signal control
- Waveforms types include DC
- Frequency Resolution 1 uHz
- DSB-AM: Double Sideband AM modulation Function
- Harmonic Function on 2 channel models
- Multi-Language User Interface



Frequency Specification

Model	T3AFG5	T3AFG10	T3AFG40	T3AFG80	T3AFG120
Waveform	Sine, Square, Ramp, Pulse, Noise, Arbitrary				
Sine	1 μ Hz ~ 5 MHz	1 μ Hz ~ 10 MHz	1 μ Hz ~ 40 MHz	1 μ Hz ~ 80 MHz	1 μ Hz ~ 120 MHz
Square	1 μ Hz ~ 5 MHz	1 μ Hz ~ 10 MHz	1 μ Hz ~ 25 MHz		
Pulse	500 μ Hz ~ 5 MHz		1 μ Hz ~ 25 MHz		
Ramp/Triangular	1 μ Hz ~ 300 kHz		1 μ Hz ~ 1 MHz		
Gaussian white noise	> 5 MHz (-3 dB)	> 10 MHz (-3 dB)	> 40 MHz (-3 dB)	> 80 MHz (-3 dB)	120 MHz (-3 dB)
Arbitrary	1 μ Hz ~ 5 MHz		1 μ Hz ~ 20 MHz		
Resolution	1 μ Hz				
Accuracy	Within 90 days \pm 50 ppm within 1 year \pm 100 ppm		10-year aging \pm 3.5 ppm at 25 Degrees C		

Sine Wave

Harmonic Distortion	DC ~ 1 MHz \leq 60 dBc 1 MHz ~ 10 MHz \leq 55 dBc	DC ~ 10 MHz \leq 65 dBc 10 MHz ~ 20 MHz \leq 60 dBc 20 MHz ~ 40 MHz \leq 55 dBc 40 MHz ~ 60 MHz \leq 50 dBc 60 MHz ~ 80 MHz \leq 45 dBc 80 MHz ~ 100 MHz \leq 40 dBc 100 MHz ~ 120 MHz \leq 38 dBc
Total harmonic waveform distortion	DC ~ 20 kHz, 1 Vpp < 0.2 %	0.075 %, 0 dBm, 10 Hz ~ 20 kHz
Spurious signal(non-harmonic)	DC ~ 1 MHz \leq 70 dBc 1 MHz ~ 10 MHz \leq 60 dBc	DC < 50 MHz \leq 70 dBc > 50 MHz \leq 65 dBc

Square Wave

Rise/fall time	< 24 ns (10 % ~ 90 %)	9 ns (10 % ~ 90 %)
Overshoot	< 5 % (typical, 1 kHz, 1 Vpp)	3 % (typical, 100 kHz, 1 Vpp, 50 Ohm Load)
Duty Cycle	20 % ~ 80 %	0.001 % ~ 99.999 % Limited By Frequency
Jitter	500 ps + 0.001 % of period	150 ps, 1 Vpp, 50 Ohm Load

Pulse

Pulse width	16 ns, Min. 1 ns resolution	16.3 ns, Min.
Rise/Fall time (10%~90%, typical)	20 ns ~ 1.6 ks	8.4 ns ~ 22.4 s
Duty Cycle	0.1 % Resolution	0.001 % ~ 99.999 %, 0.001 % Resolution, Limited by Pulse Width
Overshoot	< 5 %	3 % (typical, 100 kHz, 1 Vpp, 50 Ohm Load)
Jitter(pk-pk)	500 ps + 0.001 % of period	150 ps, 1 Vpp, 50 Ohm Load

Ramp/Triangle Wave

Linearity	< 0.1 % of Vpp (typical, 1 kHz, 1 Vpp, 100 % symmetric)	\leq 1 % of Vpp (typical, 1 kHz, 1 Vpp, 100 % symmetric)
Symmetry	0 % ~ 100 %	0 % ~ 100 %

Harmonic Output

Order	N/A	10 Maximum
Type	N/A	Even, Odd, All

Arbitrary Wave

Waveform length	16 k points	8 M points
Vertical resolution	14 bits	16 bits
Sample rate	125 MSa/s	75 MSa/s TrueArb Mode, 300 MSa/s DDS Mode
Min. Rise/Fall time	8 ns (typical)	8 ns (typical)
Jitter(pk-pk)	8 ns (typical)	150 ps, 1 Vpp, 50 Ohm Load, TrueArb Mode
Storage in non-volatile RAM memory (10 in total)	10 waveforms	10 waveforms

ABOUT TELEDYNE TEST TOOLS



Company Profile

Teledyne LeCroy is a leading provider of oscilloscopes, protocol analyzers and related test and measurement solutions that enable companies across a wide range of industries to design and test electronic devices of all types. Since our founding in 1964, we have focused on creating products that improve productivity by helping engineers resolve design issues faster and more effectively. Oscilloscopes are tools used by designers and engineers to measure and analyze complex electronic signals in order to develop high-performance systems and to validate electronic designs in order to improve time to market.

The Teledyne Test Tools brand extends the Teledyne LeCroy product portfolio with a comprehensive range of test equipment solutions. This new range of products delivers a broad range of quality test solutions that enable engineers to rapidly validate product and design and reduce time-to-market. Designers, engineers and educators rely on Teledyne Test Tools solutions to meet their most challenging needs for testing, education and electronics validation.

Location and Facilities

Headquartered in Chestnut Ridge, New York, Teledyne Test Tools and Teledyne LeCroy has sales, service and development subsidiaries in the US and throughout Europe and Asia. Teledyne Test Tools and Teledyne LeCroy products are employed across a wide variety of industries, including semiconductor, computer, consumer electronics, education, military/aerospace, automotive/industrial, and telecommunications.

Distributed by:

Teledyne LeCroy (US Headquarters)

700 Chestnut Ridge Road
Chestnut Ridge, NY, USA 10977-6499

Phone: 800-553-2769 or 845-425-2000
Fax Sales: 845-578-5985
Phone Support: 1-800-553-2769
Email Sales: contact.corp@teledynelecroy.com
Email Support: support@teledynelecroy.com
Web Site: <http://teledynelecroy.com/>

Teledyne LeCroy (European Headquarters)

Teledyne LeCroy GmbH
Im Breitenspiel 11c
D-69126 Heidelberg, Germany

Phone: +49 6221 82700
Fax: +49 6221 834655
Phone Service: +49 6221 8270 85
Phone Support: +49 6221 8270 28
Email Sales: contact.gmbh@teledynelecroy.com
Email Service: service.gmbh@teledynelecroy.com
Email Support: tlc.t3.appsupport.eu@teledyne.com
Web Site: <http://teledynelecroy.com/germany>

teledynelecroy.com



© 2018 Teledyne Test Tools is a brand and trademark of Teledyne LeCroy Inc. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product brand or brand names are trademarks or requested trademarks of their respective holders.

T3 stands for Teledyne Test Tools.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Accessories - Other category](#):

Click to view products by [Teledyne manufacturer](#):

Other Similar products are found below :

[AO1026](#) [AO1035](#) [AO1051](#) [AO1059](#) [149116](#) [149118](#) [RS40](#) [RS41](#) [AO1030](#) [AO1032](#) [AO1036](#) [AO1058](#) [4742](#) [KTS288540](#) [11-32-2733](#)
[00415](#) [00163](#) [PACC-ZD005](#) [PACC-ZD007](#) [700M20TH](#) [628824000](#) [MPT-VF](#) [B3](#) [15010A0A0100M0](#) [B3](#) [15050A0D01A2M0](#) [B3](#)
[15060A0D0100M0](#) [98-CAL020](#) [VDV500-705](#) [68-020-01P](#) [CPAK8](#) [RT-ZA19](#) [LCR-OPT-02](#) [1-1437358-1](#) [DME D110 T1](#) [LMLH 50](#)
[FLUKE PM9082/001](#) [85392-12](#) [ST18/SMAM/SMAM/72](#) [HO720](#) [45025](#) [45028](#) [CT2300](#) [CC545](#) [VT-1000](#) [CT3041](#) [VS-AVT-CABLE-08](#)
[6172A](#) [68-023-01](#) [67-023-01](#) [67-012-01](#) [15-3108](#)