




INDUSTRIAL IMAGING MULTIMETERS

FLIR DM284/285™

The FLIR DM284 and DM285 are industrial, all-in-one True RMS digital multimeters and thermal imagers that can show you exactly where a hot spot or temperature anomaly is for faster troubleshooting. Featuring Infrared Guided Measurement (IGM™) powered by a built-in 160 x 120 FLIR thermal imager, the meters visually guide you to the precise location of a problem. You'll pinpoint issues faster, more safely, and efficiently. Both multimeters are ideal for inspecting industrial-electrical, mechanical, HVAC/R, and electronic systems, and can be used for both benchtop electronics or in the field.

The DM285 uniquely features Bluetooth® which enables wireless data transfer by connecting to the FLIR Tools Mobile app on compatible mobile devices. The DM285 is also compatible with the new FLIR InSite™ workflow management tool that allows you to prepare efficient survey routes, maintain accurate documentation, share information with clients, and file instant reports.

flir.com/IGM-Multimeters

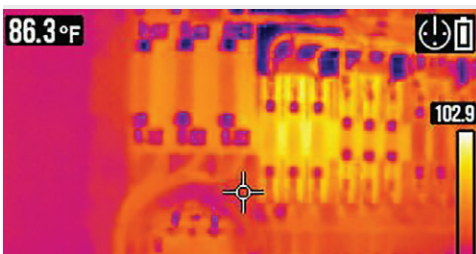

WORK SAFER AND SMARTER

Thermal imaging allows you to quickly scan for overheating system components, then use the DMM test functions to troubleshoot and diagnose the fault

- Identify energized and faulty equipment from a safe distance with non-contact temperature measurement
- Streamline inspections and simplify data collection, sharing, and reporting by wirelessly connecting to the FLIR InSite professional workflow management tool*
- Save electrical parameter data and thermal images with onboard data storage*

TROUBLESHOOT CHALLENGING PROBLEMS EFFECTIVELY

Fully loaded with features for high and low voltage applications

- Solve challenging problems with the 18-function DMM including VFD mode, True RMS, LoZ, NCV, a built-in worklight, and laser pointer
- Measure voltage, current, frequency, resistance, continuity, diode, capacitance, and temperature
- Operate easily with an intuitive menu system

DESIGN AND FUNCTIONALITY

An all-in-one tool that's built to last

- Rely on the meters' drop-tested durability in any working condition
- Change the battery quickly and easily with the 'no tool' battery compartment*
- See readings clearly on the TFT display with a wide viewing angle*

*DM285 Only.

SPECIFICATIONS

Thermal Imaging	DM284	DM285	Additional Measurements	DM284	DM285
IR Resolution	160 x 120 (19,200 pixels)	160 x 120 (19,200 pixels)	Continuity Check	600 Ω	20 Ω and 200 Ω
Thermal Imaging Detector	FLIR Lepton® microbolometer	FLIR Lepton® microbolometer	Measuring Rate	3 samples per second	3 samples per second
Temperature Sensitivity	≤ 150 mK	≤ 150 mK	Min/Max/Avg	Yes	Yes
Emissivity Settings	4 presets with custom adjustment	4 presets with custom adjustment	General Information		
Temperature Accuracy	3°C or 3.5%	3°C or 3.5%	Connectivity	–	Bluetooth®
Temperature Range	14°F to 302°F (-10°C to 150°C)	14°F to 302°F (-10°C to 150°C)	Data Logging & Storage	–	10 sets of 40K scalar measurements, 100 images
Field of View	46° x 35°	50° x 38°	Auto Power Off	Yes	Yes
Laser Pointer	Yes	Yes	Worklights	Yes	Yes
Focus	Fixed	Fixed	Display Size	2.8 in TFT screen	2.8 in TFT screen
Thermal Imaging Palette	Iron, Rainbow, Grayscale	Iron, Rainbow, Grayscale	Battery	4 AAA batteries; optional TA04 Li-Poly rechargeable battery	3 AA batteries; optional TA04 Li-Poly rechargeable battery
Level & Span	Auto	Auto	Drop Test	3 m	3 m
Measurements-Both Models			IP Rating	IP54	IP40
True RMS	Yes		Safety Category Rating	CAT III-1000V, CAT IV-600V	CAT III-1000V, CAT IV-600V
	Range	Basic Accuracy	Size (L x W x H)	200 x 95 x 49 mm (7.9 x 3.7 x 1.9 in)	200 x 95 x 49 mm (7.9 x 3.7 x 1.9 in)
AC / DC Volts	1000 V	±1.0% / 0.09%	Weight	537 g (18.9 oz)	537 g (18.9 oz)
AC / DC mVolt	600.0 mV	±1.0% / 0.5%	Warranty	10 year on product and detector	10 year on product and detector
VFD AC Volts	1000 V	±1.0%	Box Contents		
AC / DC LoZ V	1000 V	±2.0%	Multimeter, L91 lithium batteries, silicone test leads, test lead storage/tripod accessory, Type-K thermocouple, alligator probes, soft carrying case		
AC / DC Amps	10.00 A	±1.5% / 1.0%	Ordering Information		
AC / DC mAmps	400.0 mA	±1.5% / 1.0%	Order #		
AC / DC μAmps	4,000 μA	±1.0%	FLIR DM285 Industrial Imaging Multimeter with Datalogging, Connectivity, IGM	793950372876	
Resistance	6.000 MΩ 50.00 MΩ	±0.9% ±3.0%	FLIR DM284 Imaging True RMS Industrial Multimeter with IGM	793950372845	
Capacitance	10.00 mF	±1.9%	For a complete list of available accessories, go to: flir.com/store/instruments/testaccessories		
Diode Test	1.500 V	±0.9%			
Flex Clamp Range	3000 A AC (Optional TA72/74)	±3.0% + 5 digits			
Frequency Counter	100.00 kHz	±0.1%			
Temperature, Type-K Thermocouple	-40°F to 752.0°F -40°C to 400°C	±1.0% + 5.4°F ±1.0% + 3°C			

Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
USA
PH: +1 866.477.3687

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 7080

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 09/28/17

17-2459-INS-TAM



The World's Sixth Sense®

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [Teledyne FLIR / Extech](#) manufacturer:

Other Similar products are found below :

[FS881](#) [40705X](#) [P 8100](#) [30XR](#) [34XR](#) [35XP](#) [TESTO 745](#) [0590 7450](#) [TESTO 760-2](#) [0590 7602](#) [TESTO 760-3](#) [0590 7603](#) [440012](#) [AX-155](#)
[AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-594](#) [AX-LCR42A](#) [AX-MS8221A](#) [AX-MS8250](#) [AX-PDM01](#) [AX-T520](#) [AX-](#)
[T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM525S](#) [BM805S](#) [BM807S](#) [BM817S](#) [BM827S](#) [BM829S](#) [BM857S](#) [BM859S](#) [BM867S](#) [33XR](#) [UNITEST](#)
[TESTFIX 9023](#) [37XR](#) [UT58C](#) [UT71A](#) [UT71E](#) [KIT BRUA-19X](#) [38XR](#) [77-4/EUR](#) [VP-450-E](#) [LCR55](#) [DM78A](#) [05005655001](#) [8045VDE](#)
[15XP-B](#)