


## EX360 Series CAT IV True RMS MultiMeters + NCV



**True RMS provides accurate readings when measuring distorted or noisy waveforms. Choose a model designed for Electrical, HVAC, or Industrial Applications. Advanced LoZ feature eliminates false readings caused by ghost voltages. CAT IV safety rating ensures the highest level of protection.**

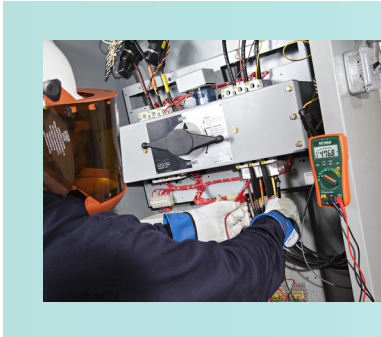

Model EX360  
Electrical DMM

Model EX365  
Industrial DMM

Model EX363  
HVAC DMM

### Common Features

- True RMS for accurate AC measurements
- 6000 count white LED backlit display
- Fast 60-segment Analog Bargraph for viewing trends
- LoZ prevents false readings caused by ghost voltages (see back page for illustration)
- Built-in Non-contact AC Voltage Detector (NCV) with Hi/Low ranges and LED indicator
- Continuity beeper with visual alert
- Smart Data Hold freezes the displayed reading and automatically updates the reading and alerts user (audibly and visually) if the measurement changes  $\pm 50$  counts
- Peak Hold captures the highest reading
- Relative Mode for Capacitance Zero and offset adjustment
- Auto Power off with disable

- Complete with test leads, 9V battery, holster with tilt stand and built-in magnet, and general purpose bead wire temperature probe (Model EX363)

### Model Features

- **Model EX360** — for Electrical applications
  - Frequency and Capacitance measurement
- **Model EX363** — for HVAC applications
  - $\mu$ A function for HVAC flame rod measurements
  - Type K Temperature
  - Frequency and Capacitance measurement
- **Model EX365** — for Industrial/Commercial applications
  - 10A AC/DC Current measurement with 11A/1000V high energy fuse
  - Frequency and Capacitance measurement

Specifications on next page

### Ordering


- EX360 **N**\*..... Electrical CAT IV True RMS MultiMeter + NCV
- EX363 **N**\*..... HVAC CAT IV True RMS MultiMeter + NCV
- EX365 **N**\*..... Industrial CAT IV True RMS MultiMeter + NCV

**N**\* Indicates products that are available with optional calibration traceable to NIST. Order with -NIST after part number for product plus Calibration Certificate.



EX360 UPC Code: 793950393604  
EX363 UPC Code: 793950393635  
EX365 UPC Code: 793950393659

Specifications	EX360	EX363	EX365
Basic Accuracy (DCV)	0.5%	0.5%	0.5%
NCV Detector	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)
DC/AC Voltage	0.1mV to 1000V	0.1mV to 1000V	0.1mV to 1000V
DC/AC Current	—	—	1mA to 10A
DC/AC $\mu$ A Current	—	600 $\mu$ A	—
Resistance	0.1 $\Omega$ to 40M $\Omega$	0.1 $\Omega$ to 40M $\Omega$	0.1 $\Omega$ to 40M $\Omega$
Capacitance	1nF to 10mF	1nF to 10mF	1nF to 10mF
Frequency	0.01Hz to 100kHz	0.01Hz to 100kHz	0.01Hz to 100kHz
Temperature (Type K)	—	-40 to 742°F (-40 to 394°C)	—
Diode Test	1.5V	1.5V	1.5V
Continuity	Audible and Visual	Audible and Visual	Audible and Visual
Dimensions	6.5x3.2x1.7" (164x82X44mm)	6.5x3.2x1.7" (164x82X44mm)	6.5x3.2x1.7" (164x82X44mm)
Weight	5.9oz (450g)	5.9oz (450g)	5.9oz (450g)

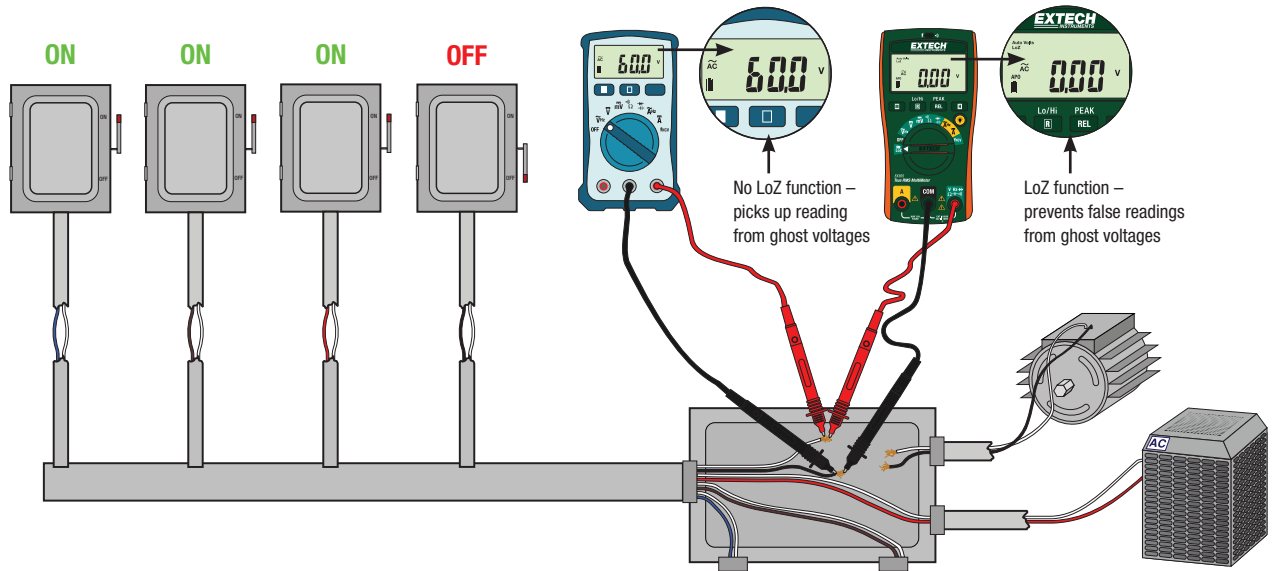

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Teledyne FLIR](#) / [Extech](#) manufacturer:*

Other Similar products are found below :

[TL708](#) [365510](#) [LT45](#) [MO260](#) [RF41](#) [RH300-CAL](#) [RHT20](#) [140000](#) [AN300](#) [149116](#) [149118](#) [BT100](#) [HT30](#) [CA3018](#) [EX363](#) [EZ40](#) [AN320](#)  
[PH110](#) [PRC10](#) [PRT200](#) [PT-30](#) [RE300](#) [RH490](#) [380395](#) [380400](#) [380941](#) [380975](#) [MA120](#) [MA1500](#) [MA3010](#) [407764-EXT](#) [412300](#)  
[412355A](#) [445715](#) [461895](#) [475040](#) [480826](#) [380562](#) [380926](#) [CB20](#) [VB400](#) [39272](#) [VB450](#) [409996](#) [VP50](#) [42510A](#) [42570](#) [445814](#) [DL160](#)  
[461893](#)