

order number: J00026A3000

unshielded field assembly RJ45 plug UFP8 T568 A Cat.6_A,
AWG24/1-AWG23/1; AWG27/7-AWG23/7

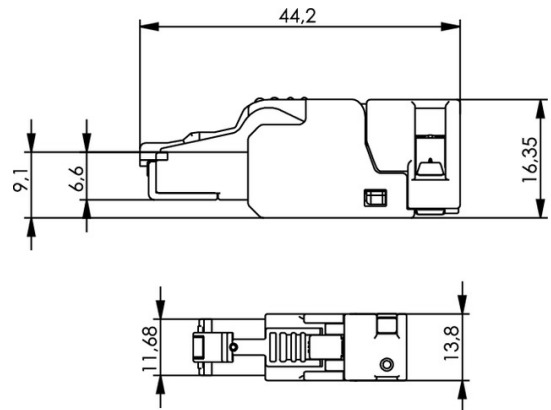


Fig. may differ



Technical Attributes	
Short name	UFP8 T568A Cat.6 _A
Remarks	AWG 24/1-23/1, AWG 27/7-23/7, with pre-assembled protection cap

Performance Characteristics

- pre-assembled protection cap
- robust plastic housing
- full metal shielding between pairs of wires
- can be assembled in 60 seconds without any special tools
- optimised for the field, including demanding applications
- suitable for cabling in office buildings, data centers, industrial facilities and home networks
- supreme reliability
- ideal for network repairs, special lengths and extensions
- ideal for network repairs, special lengths and extensions

Mechanical Characteristics	
	0,8 - 1,1 mm

Core Diameter	
Durability (Matings)	≥ 750
Mating Requirements Cu-Conductor diameter: solid	0.51 - 0.57 mm (AWG24/1-23/1)
Mating Requirements Cu-Conductor diameter: stranded	0.51 mm (AWG26/19)
Cu-Conductor diameter: solid	0.51 - 0.64 mm (AWG24/1-22/1)
Mating Requirements Cu-Conductor diameter: stranded	0.61 - 0.78 mm (AWG24-22/19)
Insertion force	≤ 20 N
Reusable contacts	≤10 cycles
Cu-Conductor diameter: stranded	0.51 mm (AWG26/19)
Overall cable diameter	5,5 - 8,5 mm
Material: contacts	Federstahl
Material: piercing contacts	phosphor bronze tinned
Material: uplock hook	PBT UL94 V0
Material: shield contact	brass, nickel-plated
Material: shielding housing	zinc diecast, nickel-plated
Material: connector housing	PC UL94 V0
Material: PCB	FR4 UL 94 V0
Material: contacts	phosphor bronze tinned
Material: wire pair presorting	PC UL94 V0 grey
	PBT UL94 V0
Material: cable clamp	PC UL94 V0
Material: protection cap	PBT UL94 V0

Climatic Characteristics	
UL	E244889
Temperature range [°C]	-40/ 70

Electrical Characteristics	

PoE+ acc to IEEE 802.3at	Adequate for Power over Ethernet+
Current carrying capacity at 50°C	1 A

Standards	
Connectors	IEC 60603-7-41

10 Gigabit Ethernet acc. to IEEE 802.3an	Adequate for 10 Gigabit Ethernet

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:

Click to view products by [TELEGARTNER](#) manufacturer:

Other Similar products are found below :

[RJE231881317T](#) [MP1010RX-1000](#) [MP44RX-1000](#) [GAX-3-66](#) [GAX-8-62](#) [93606-0253](#) [GD-A-44](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-A-88](#) [GDLX-N-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-N-44M](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT2-N-1010](#) [GMX-SMT2-N-64-50](#) [GMX-SMT2-S6-88](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GRT1-BT1-5](#) [GSGX-N-2-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-30](#) [GSX-NS-88-3.05-50](#) [GSX-NS-88-3.68](#) [1-1775629-2](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [1300500326](#) [1300500227](#) [1300530003](#) [1300570002](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1400000](#) [1413176](#)