


JUPITER JF2



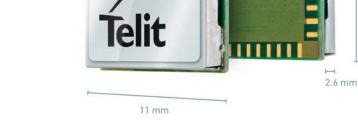

Product Description

The JF2 offers developers and integrators the smallest, completely integrated GPS solution for positioning applications based on a 1.8 V supply. It is fully interoperable with Telit cellular modules for a ready-to-use solution bundle with no additional integration effort or cost. The Telit cellular modules.

Key Features

- Based on the SiRFstarIVTMcore
- GNSS supported: GPS L1
- 11 x 11 x 2.6 mm QFN package
- Flash, EEPROM or ROM based versions
- Assisted GPS
- High RF sensitivity with jamming detection and removal
- Supply voltage range: 1.79 1.9 VDC
- Advanced power modes
- Ports: 1PPS, UART, I²C and SPI

Key Benefits

- Supports AGPS using Extended Ephemeris injection as well as Extended Ephemeris on-board generation for fastest TTFF
- Easy integration in cellular/GNSS bundle solutions with Telit cellular modules
- GPS solution with embedded Flash: high performance, always up-to-date and lowest BOM cost and footprint

Family Concept

JF2

Our positioning product portfolio is the result of over twenty years of experience in GNSS applications. Telit has developed a range of products compatible with the wellknown GPS constellation as well as its Russian counterpart GLONASS. Moreover, our portfolio is fully aligned with the upcoming service launch of Europe's Galileo constellation. Valuable features such as Dead Reckoning, Precision Timing, as well as speed and reliability assured by multiconstellation coverage, provide additional benefits for your application.

Your application development effort can also benefit significantly from the seamless integration between Telit's 2G cellular and positioning modules. This bundling of cellular and positioning modules significantly reduces development complexity without adding costs. Multi-constellation positioning products applied together with our eCall / ERA-GLONASS compliant cellular modules bring you readyto- use emergency automotive tracking solutions for the European and Russian markets.

Typical applications include fleet management systems, European GPS-assisted road tolling systems, cellular base stations, in-car navigation systems, automotive telematics systems, and GPS-based personal sports training monitors.

Combine your GNSS module with



11 mm

Short Range modules



www.telit.com



JUPITER **JF2**

Product Features

- Standards: NMEA and OSP
- 48 Channel GPS architecture
- Positional Accuracy (CEP50): Autonomous Positional Error < 2.5 m
- Accuracy
- Speed: < 0.01 m/s
- Heading: < 0.01 deg
- Time To First Fix (90% @ -130 dBm) - Hot Start: 1 s
 - Cold Start: < 35 s
- A-GPS: local ephemeris prediction
- A-GPS: server predicted ephemeris file injection

Environmental

- Dimensions: 11 x 11 x 2.6 mm
- Weight: 1 g
- 32-pad QFN package, requiring only 2 layer PCB
- Temperature Range
- Operating temperature: -40 to +85°C
- Storage temperature: -40 to +85°C

Interfaces

- UART, SPI, I²C interfaces
- PPS for precise timing
- EGNOS, WAAS, GAGAN and MSAS capability embedded with correction of positional errors due to ionospheric and orbital disturbances
- RTC for efficient power management

Electrical & Sensitivity

- Current consumption
 - Hibernate Mode current: 14 uA
 - Low power mode (Tracking 1Hz): 10 mA
 - Full power Tracking: 37 mA
- Power supply
 - Range from 1.75 up to1.9 V
- Sensitivity
 - Acquisition: -147 dBm
 - Navigation: -160 dBm
 - Tracking: -163 dBm

Telit reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document This document may be revised by Telit at any time. For most recent documents, please visit www.telit.com Copyright © 2015, Telit

* Copyright © 1990-2015, Python Software Foundation

Telit Communications S.p.A. Via Stazione di Prosecco, 5/B I-34010 Sgonico (Trieste), Italy Phone +39 040 4192 200 Fax +39 040 4192 383 E-Mail EMEA@telit.com Telit Wireless Solutions Inc. 3131 RDU Center Drive, Suite 135 Morrisville, NC 27560, USA Phone +1 888 846 9773 or +1 919 439 7977 Fax +1 888 846 9774 or +1 919 840 0337 E-Mail NORTHAMERICA@telit.com Telit Wireless Solutions Inc. Rua Paes Leme, 524, Conj, 126 05424-101, Pinheiros São Paulo-SP-Brazil Phone +55 11 3031 5051 Fax +55 11 3031 5051 E-Mail LATINAMERICA@telit.com Telit Wireless Solutions Co., Ltd. 8th FL, Shinyoung Securities Bld. 6, Gukjegeumyung-ro8-gil, Yeongdeungpo-gu Seoul, 150-884, Korea Phone +82 2 368 4600 Fax +82 2 368 4606 E-Mail APAC@telit.com

www.telit.com

Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all IoT topics, get direct support by region

(EMEA, North America, Latin America, APAC), take part in this

quickly growing IoT community and exchange experiences.

- 👪 www.telit.com/techforum
- www.telit.com/facebook
- www.telit.com/twitter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for telit manufacturer:

Other Similar products are found below :

<u>3990251013</u> <u>700-0084</u> <u>700-0088</u> <u>HEPCHDAT204T701</u> <u>LE910C1N506T0S1000</u> <u>HE910NAR206T701</u> <u>HE910GPS206T701</u> LEPCIC1N502T7A6000 HE910NAD206T701