


GBR-612 Series

Characteristic

GBR-612 series resistors are made in thick film technology, on ceramic substrates with thickness 1mm. They are characterized by high power at compact sizes and very small inductance (below $3\mu\text{H}$). Heaters have outputs in the form of solder fields or soldered wires (on request).

Applications

As heating elements for a different types of heaters, precise surface heating, and as a high power resistors.

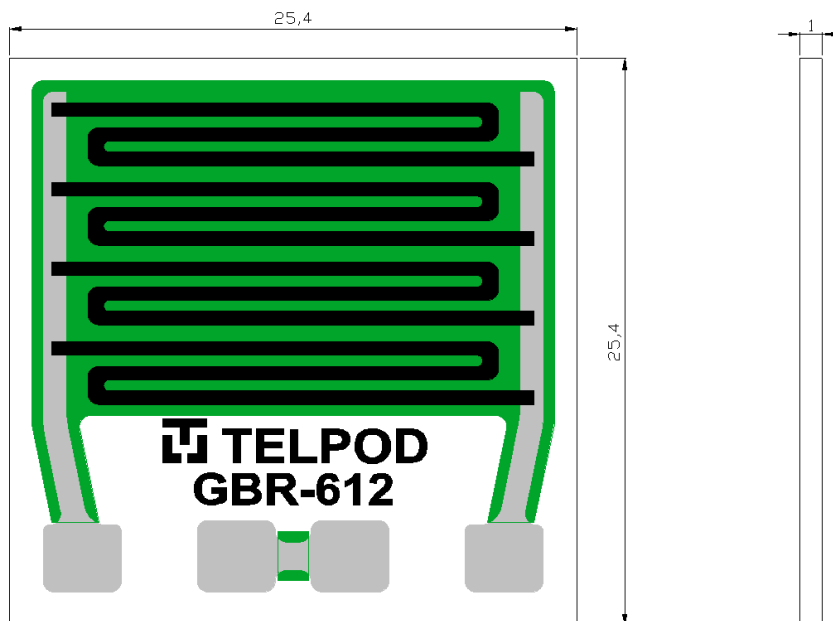


Pic. 1. Preview with dimensions [mm]

GBR-612 Series

<u>Parameter</u>	<u>Value</u>
Rated power (on heatsink)	5 - 100W
Pulse power (3s) (on heatsink)	150W
Resistance	1,5Ω - 11,5kΩ
Tolerance	±10%
Supply voltage	12 - 240V
Temperature coefficient of resistance (TCR)	+50 ppm/°C
Maximum element temperature	300°C
Operating temperature	-40°C ... +200°C

Product marking

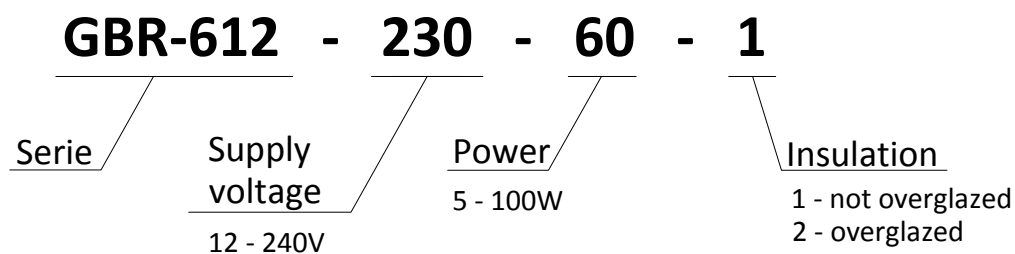

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Telpod manufacturer](#):

Other Similar products are found below :

[0480100/7660087](#) [A51001500](#) [A51002900](#) [A51003200](#) [CN-15.1-100R](#) [CN-15.1-10K](#) [CN-15.1-150K](#) [CN-15.1-1K](#) [CN-15.1-220R](#) [CN-15.1-22K](#) [CN-15.1-2K2](#) [CN-15.1-330R](#) [CN-15.1-33K](#) [CN-15.1-3K3](#) [CN-15.1-470K](#) [CN-15.1-470R](#) [CN-15.1-4K7](#) [CN-15.1-680R](#) [CN-15.1-6K8](#) [CN-15.2-100R](#) [CN-15.2-10K](#) [CN-15.2-150K](#) [CN-15.2-15K](#) [CN-15.2-1K](#) [CN-15.2-1M](#) [CN-15.2-220K](#) [CN-15.2-2M2](#) [CN-15.2-330R](#) [CN-15.2-47K](#) [CN-15.2-4K7](#) [CW-18-100K-20P-1](#) [CW-18-10K-P4](#) [CW-18-1K-20P-1](#) [CW-18-220R-20P-1](#) [CW-18-22K-20P-1](#) [CW-18-2M2-20P-1](#) [CW-18-4K7-20P-1](#) [CW-18-4K7-P5-12MM](#) [DG-106 1K5](#) [DG-106 330R](#) [DG-106 3K3](#) [DG-106 470R](#) [DG-106 680R](#) [DG-160 100R](#) [DG-160 150R](#) [DG-160 2K2](#) [DM-107 10K](#) [DM-107 22K](#) [DM-107 2K2](#) [DM-107 47K](#)