

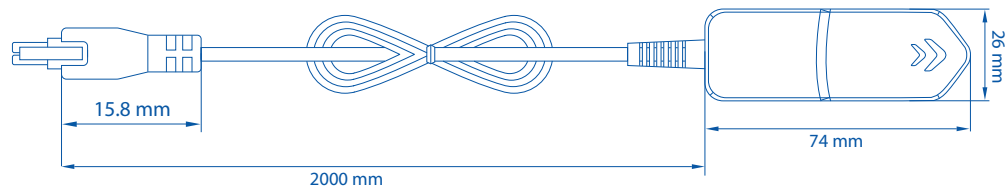



US POWER SUPPLY 9W

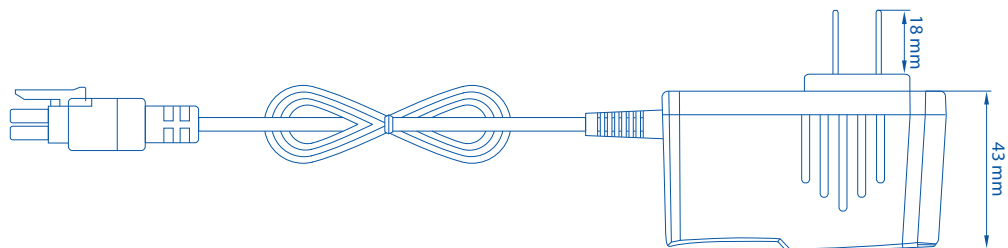

SOFTWARE	RATED VALUE	ABSOLUTE MAXIMUM
Input voltage	100-240 VAC	90-264 VAC
Input Frequency	50/60 Hz	47-63 Hz
Input Current (@100-240 VAC)	0.4 A	-
Inrush Current (@100-240 VAC)	-	40 A
Output Voltage	9 VDC	8.55-9.45 VDC
Output Current	0-1 A	-
Overshoot	5 %	10 %
Certification	UL 60950-1; CSA C22.2 No. 60950-1-07; 47 CFR FCC part 15 subpart B, 10-1-2016; ANSI C63.4:2014; IEC 62321-7-1:2015, IEC 62321-6:2015, IEC 62321-5:2013, IEC 62321-4:2013, IEC 62321:2008 Annex C.	
Short-Circuit protection	v	
Input protection	Fuse	
HIPOT (Dielectric Withstand Test)	Primary to Secondary: 3000 VAC	
MTBF	50000 h	
Input connector	US	
Output connector	4-pin, 3 mm pitch	



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wall Mount AC Adapters](#) category:

Click to view products by [Teltonika](#) manufacturer:

Other Similar products are found below :

[ADP-163 E](#) [ADP-167 J](#) [ADP-168 K](#) [ADP-159 A](#) [ADP-165 G](#) [PSAC05A-050L6](#) [RLMDT361800](#) [P25A14E-R1C](#) [DA10-050CH](#) [DA5-050US-B](#) [DA10-050UK](#) [RLMDT701800](#) [WSU120-2000-R13](#) [WSU180-1330-13](#) [AC-DC ADAPTER 160W](#) [WSU120-2000-13](#) [WSU150-0800-13](#) [WSU075-3200-13](#) [WSU060-2000-R13](#) [WSU090-2500-13](#) [WSU050-2000-R13](#) [WSU240-1000-13](#) [WSU240-0500-R13](#) [WSU075-1500-13](#) [WSU050-3000-13](#) [WSU120-1500-13](#) [WSU120-1500-R13](#) [WSU045-1500-13](#) [WSU240-0750-13](#) [WSU090-2500-R13](#) [WSU240-1500-13](#) [WSU180-0660-13](#) [WSU075-1500-R13](#) [WSU090-1300-13](#) [WSU180-1330-R13](#) [BB-SMI1812VP230C1](#) [WSU050-1500-13](#) [WSU090-0800-13](#) [WSU120-0700-13](#) [WSU045-3000-13](#) [WSU180-0450-13](#) [WSU150-0560-R13](#) [WSU135-0880-13](#) [WSU120-3000-13](#) [WSU120-1000-R13](#) [WSU090-1300-R13](#) [WSU060-1250-R13](#) [WSU060-1250-13](#) [WSU045-2000-R13](#) [WSU045-1500-R13](#)