

TRB142

RS232 LTE GATEWAY BOARD

Industrial LTE Cat 1 Gateway Board TRB142 is equipped with an RS232 Interface, Digital Inputs/Outputs and a microUSB port. TRB142 compact design makes this Gateway perfect for an application where a sole gadget must be remotely controlled over the RS232 Interface. TRB142 is engineered to be used in Industrial applications, therefore, it has a wide range of software features such as SMS control, Firewall, OpenVPN, IPsec, RMS and FOTA support.



RS232 is an Industrial standard for serial communication



LTE Cat 1 for M2M/IoT communications



Compact size, easy integration



Wide range of power supply voltages



Teltonika Remote Management System compatible



OpenLinux based OS allows high software customisation

EFFICIENT



- Easy Integration
- Compact size
- Low Power consumption

ADVANCED

- LTE Cat 1 for M2M via RS232
- High Performance
- Open platform with SDK

SECURE

- OpenVPN and IPsec
- Embedded Firewall
- Encrypted management with Remote Management System

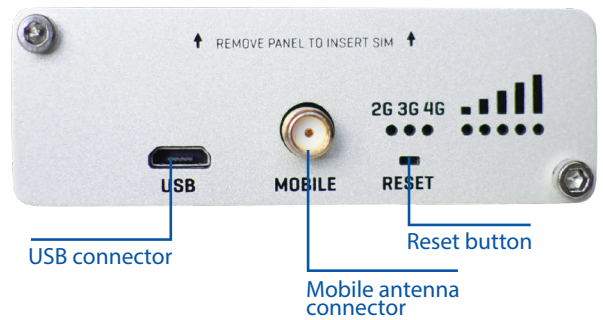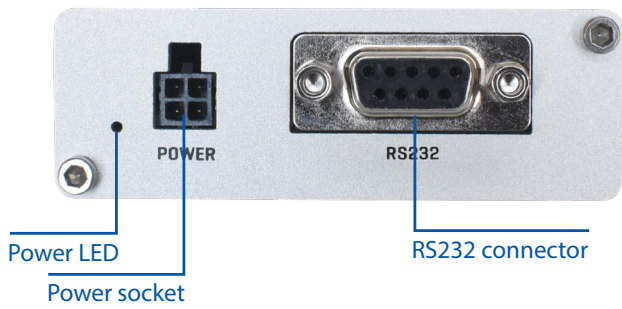

Hardware

Mobile	LTE (Cat1)/3G/2G
SIM slot	Mini SIM (2FF)
Antenna connector	1 x SMA for LTE
RS232	DB9 socket, 5 pin configuration with flow control, baud rate 300 - 115200
Input/Output	2 x Digital/Analog Inputs/Outputs (configurable)
CPU	ARM Cortex-A7 1.2 GHz CPU
RAM	128 MB (50 MB available for userspace)
Flash	512 MB (70 MB available for userspace)
Input voltage range	9 - 30 VDC
Power connector	4 pin industrial DC power socket
Configuration interface	Virtual NIC via Micro-USB connector
LED Indicators	Power, signal, network and data status LEDs
Operating temperature	-40° C to 75° C
Dimensions	60 mm x 70 mm x 18 mm
Weight	135 g

Software

Operating system	Linux OS with Yocto SDK (offering high software customisation)
Network	NAT, Firewall (port forward, traffic rules, custom rules), DDNS (>25 service providers supported)
RS232 related services	Modbus, Serial over IP, NTRIP
Remote management	RMS Support, FOTA support, SSH, CLI, SMS Utilities (status/configuration)
Status watchdogs	Ping reboot, periodic reboot
Additional features	Internet connectivity over USB virtual network interface



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Teltonika](#) manufacturer:

Other Similar products are found below :

[RUT955T033B0](#) [TSW100000000](#) [RUTX12000000](#) [TCR100000000](#) [RUTX11000300](#) [RUT360000000](#) [RUTX14000000](#) [RUTXR10000000](#)
[RUTX09000000](#) [RUTX11000000](#) [TRB141003000](#) [RUT951100000](#) [TRB145003000](#) [RUT241010000](#) [RUTX08](#) [RUTX10](#) [RUT950V022C0](#)
[TRB142003000](#) [RUT956100000](#) [TRB245000000](#) [RUT955K034S0](#) [RUT955M036V0](#) [RUT950U025A0](#) [PR1KCS28](#) [PR3PXUS3](#)
[RUT9550033B0](#) [RUT955T03530](#) [RUT950K02400](#) [TSW110000000](#) [RUT300000000](#) [RUT2400DE000](#) [PR5MEC22](#) [RUT950U022C0](#)
[RUT950J02400](#) [PR3PUUS3](#) [PR5MEC00](#) [RUT955J034S0](#) [RUTX11100400](#) [RUT24002U000](#) [058R-00229](#) [TRB140003000](#) [RUT24006E000](#)
[RUT24001U000](#)