


SPECIAL ALKALINE - LR1

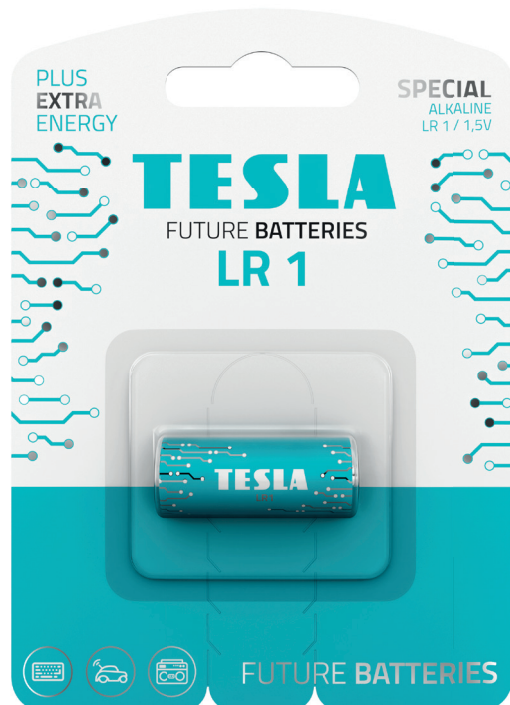

DESCRIPTION:

Mercury Free Alkaline Manganese Battery,
LR1 / Non-Rechargeable

CHEMICAL SYSTEM:

Alkaline Manganese

SHELF LIFE:

7 years

NOMINAL VOLTAGE:

1,5 Volts

NOMINAL DIMENSIONS:

Ø 11.2 mm × 30.0 mm

TERMINALS:

Protruded positive(+) and flat negative (-) contacts

JACKET:

Foil jacket

APPLICATIONS:

All electronic devices, e.g. toys, audio appliances,
remote controls, fishing rods.

STORAGE TEMPERATURE:

+10 °C to + 25 °C

Should be stored in dry and cool place.

NOMINAL WEIGHT:

9,5 g

CROSS REFERENCES:

TESLA	IEC	ANSI
LR1	LR1	910A

TYPICAL SERVICE LIFE:

DISCHARGE RESISTANCE	DISCHARGE CONDITION	END POINT VOLTAGE	SERVICE LIFE
20 Ohms	24 Hrs/Day	0.9V	10.0 Hrs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cylindrical Battery Contacts, Clips, Holders & Springs](#) category:

Click to view products by [TESLA](#) manufacturer:

Other Similar products are found below :

[12BH36A-GR](#) [200](#) [161](#) [183](#) [270](#) [QX3506](#) [5220](#) [5230](#) [1055](#) [1088](#) [5250](#) [KT0008](#) [1119](#) [5207](#) [246](#) [BWCD-L4.5W2.0H2.3](#) [BWCD-L6.0W2.0H2.0](#) [BW0041BG-L2.5W1.0H1.5](#) [BW0031AG-L3.5W1.0H3.0](#) [BWCD-L5.0W2.0H2.5](#) [BW0019CG-L3.5W1.5H4.3](#) [BW0036AG-L3.5W1.0H1.4](#) [BW0034AG-L3.5W0.9H1.5](#) [BW0033BG-L3.4W0.9H2.0](#) [BW0041CG-L2.5W1.0H1.8](#) [BW0028AG-L3.5W1.5H2.05](#) [BW0098DG-L4.0W1.5H2.0](#) [BW0019BG-L3.5W1.5H3.8](#) [BWCD-L6.5W2.0H2.0](#) [BWCD-L4.0W2.0H1.0](#) [BWCD-L5.5W2.0H3.0](#) [BW0019AG-L3.5W1.5H3.5](#) [BWCD-L3W2.0H1.0](#) [ECT818002831](#) [ECT81800A081](#) [ECT818003141](#) [ECT81800B009](#) [ECT818002399](#) [F9-7-6-0.4Z](#) [F8-10-0.4-1.3](#) [F10-10-6-0.4-1.3](#) [F8-8-5-0.4Z](#) [F10-12-0.4-1.3](#) [F10-10-6.5-0.4P](#) [F10-10-6.5-0.4 Z](#) [LR20 INDUSTRIAL INTENSE](#) [HC0M](#) [CW332](#) [HC4](#) [PCL5A](#)