

(1.27 mm) .050"

TFC SERIES

COST-EFFECTIVE RELIABLE HEADER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TFC

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze

Plating:
Au or Sn over
50 μm (1.27 μm) Ni

Current Rating:
3.1 A per pin
(2 pins powered)

Voltage Rating:
350 VAC mated with SFC

Operating Temp Range:
-55 °C to +125 °C

RoHS Compliant:
Yes

PROCESSING

Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0.10 mm) .004" max (03-25)
(0.15 mm) .006" max (30-50)*
*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- Other sizes

Board Mates:
SFC

Cable Mates:
SFS, SFS-D

| MATED HEIGHTS | | |
|---------------|-----|---------------|
| LEAD STYLE | | MATED HEIGHT* |
| TFC | SFC | |
| -01 | -T1 | (5.97) .235 |
| -11 | | (7.75) .305 |
| -21 | | (9.53) .375 |
| -31 | | (11.43) .450 |
| -02 | -T2 | (6.35) .250 |
| -12 | | (8.13) .320 |
| -22 | | (9.91) .390 |
| -32 | | (11.81) .465 |

*Processing conditions will affect mated height.

Shrouded body for blind mating


(1.27 mm x 1.27 mm)
.050" x .050"
micro pitch

Choice of eight body heights

Surface Mount or Through-hole

Alignment pin option available

| | | | | | | |
|------------|----------|---|-------------------------------|--|----------|---|
| TFC | 1 | NO. PINS PER ROW | LEAD STYLE | PLATING OPTION | D | OPTION |
| | | 03, 04, 06, 08 (Lead Style -01 & -02 only) | -X1 = Through-hole | -F = Gold flash on post, Matte Tin on tail | | -RA = Right-angle (-01 only) |
| | | 05, 07, 10, 15, 20, 25, 30, 35, 40, 45, 50 (Standard sizes) | -X2 = Surface Mount | -L = 15 μm (0.38 μm) Gold on post, Matte Tin on tail | | -A = Alignment Pin |
| | | | | | | -LC = Locking Clip (Manual Placement required) (not available with -RA) |
| | | | | | | -K = (6.75 mm) .266" DIA Polyimide film Pick & Place Pad |
| | | | | | | -P = Plastic Pick & Place Pad (5 positions min.) |
| | | | | | | -TR = Tape & Reel (-X2 only) |

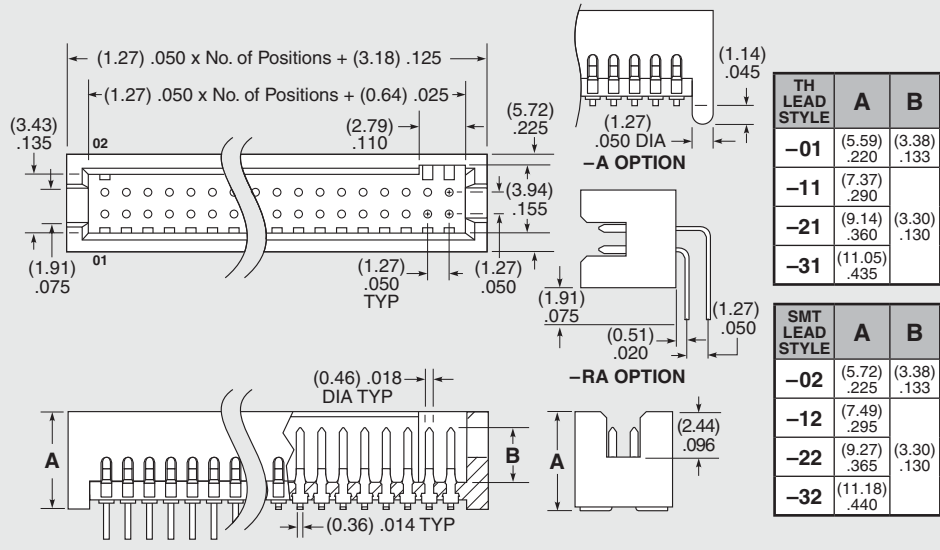

Note:
Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#)