



THINKING ELECTRONIC INDUSTRIAL CO., LTD.

HEAD OFFICE: 12F, No.93, Dashun 1st Rd., Zuoying Dist., Kaohsiung, Taiwan
TEL: 886-7-5577660 FAX: 886-7-5570560

MANUFACTURING SITE

- KAOHSIUNG FACTORY 1: No. 51, Kaifa Rd., N.E.P.Z, Kaohsiung City 81170, Taiwan
TEL: 886-7-9616668 FAX: 886-7-9616698
- KAOHSIUNG FACTORY 2: No. 2-2, Xinjian S. Rd., N.E.P.Z., Kaohsiung City 81170, Taiwan
TEL: 886-7-9630001 FAX: 886-7-3635113
- CHANGZHOU FACTORY: No.6 Longmen Rd., Wujin High & New-Tech Industrial
Development Zone, Changzhou, Jiangsu, China 213161
TEL:86-519-86578999 FAX:86-519-86558643
- DONG GUAN FACTORY: No.45, East Rd., Sha-Tao Dist., Chang-An Town,
Dongguan City, Guangdong, China 523863
TEL:86-769-85542016 FAX:86-769-85546890
- YICHANG FACTORY: No. 283 Xiaoting Avenue, Xiaoting Dist., Yichang
City 443007, Hubei, China
TEL:86-717-6510010 FAX:86-717-6511430



SPECIFICATION FOR APPROVAL

CUSTOMER _____

CERTIFIED
MODEL/TYPE

PPL07100MA0B5

PART NO.

PPL07100MA0B5YFS(RoHS)

APPLICATION _____

CUSTOMER P/N _____

ISSUE DATE

Mar.16.2019

REV. NO. _____

REV. DATE _____

FOR CUSTOMER APPROVAL	CHECKED BY
	<i>Haili Gong</i>
	APPROVED BY
	<i>Huaifang Zhang</i>





REVISED RECORD SHEET

REV. NO	REV. DATE	REVISED CONTENT



INDEX	Page
■ Part Number Code	1
■ Structure and Dimensions	2
■ Electrical Characteristics	2
■ Reliability	3
■ Soldering Recommendation	4
■ RoHS Compliant Declaration	5
■ Warehouse Storage Conditions of Products	5
■ Safety Approvals	6
■ Certificates	6


Part Number Code

Example :



PP **L** **07** **100** **M** **A0** **B5** **Y** **FS**
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

No.	Item	Digit	Specification
(1)	Product Type	PP	Thinking overload protection PP type
(2)	Type Series	L	Lead type
(3)	Size	07	φ7 mm
(4)	Resistance(R ₂₅)	100	10×10 ⁰ =10Ω
(5)	Tolerance of R ₂₅	M	±20%
(6)	Curie Temperature	A0	100°C (Typ.)
(7)	Max. Voltage	B5	250V
(8)	Packaging	Y	RoHS compliance & Bulk
(9)	Optional Suffix	FS	Vmax:250Vac I _{max} :3A

Structure and Dimensions

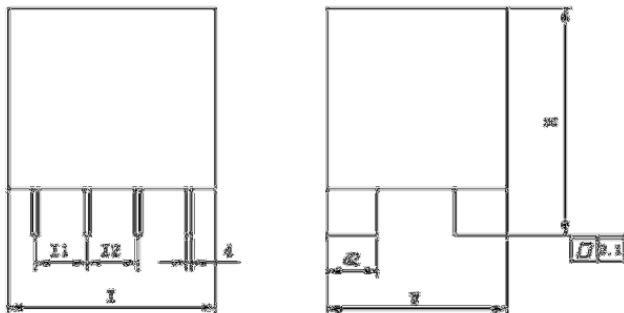

Item	Hmax	lmax	Wmax	l1	l2	d	d2
mm	7.5	7.5	10.3	2.5 typ	0.95 typ	0.15 typ	2.6 typ



Solder Pad

Electrical Characteristics

(unit : mm)

Part No.	Zero-power Resistance at 25±2°C	ΔR25 Resistance match	Max. Current	Max. Voltage	Responding Time at Vr,1A	Non-operating Current at -40±2°C	Trip Current at -40±2°C	Non-operating Current at -20±2°C
	R ₂₅ (Ω)	R1-R2 (Ω)	I _{max} (A)	V _{max} (Vac)	t _s (s)	I _n (mA)	I _t (mA)	I _n (mA)
PPL07100MA0B5YFS	10±20%	≦ 1	3	250	≦ 4	221	510	197

Part No.	Trip Current at -20±2°C	Non-operating Current at 0°C	Trip Current at 0°C	Non-operating Current at 25±2°C	Trip Current at 25±2°C	Non-operating Current at 40±2°C	Trip Current at 40±2°C	Non-operating Current at 50±2°C
	I _t (mA)	I _n (mA)	I _t (mA)	I _n (mA)	I _t (mA)	I _n (mA)	I _t (mA)	I _n (mA)
PPL07100MA0B5YFS	455	165	381	130	300	106	245	89


Part No.	Trip Current at 50±2°C	Non-operating Current at 60±2°C	Trip Current at 60±2°C	Non-operating Current at 70±2°C	Trip Current at 70±2°C	Non-operating Current at 85±2°C	Trip Current at 85±2°C	Operating Temperature Range (V=V _{max})	Operating Temperature Range (V=0)
	I _t (mA)	I _n (mA)	I _t (mA)	I _n (mA)	I _t (mA)	I _n (mA)	I _t (mA)	(°C)	(°C)
PPL07100MA0B5YFS	205	81	187	65	150	44	101	0 ~ +60	-25 ~ +125

Reliability

Item	Standard	Test conditions / Methods	Specifications															
Solderability	IEC 60738-1	245±3 °C , 2±0.5 sec	At least 95% of terminal electrode is covered by new solder															
Resistance to Soldering Heat	IEC 60738-1	260 ± 3 °C , 10 ± 1 sec	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage															
Vibration	IEC 60738-1	Frequency range: 10~55Hz Amplitude: 0.75mm or 98m/S ² Direction: 3 mutually perpendicular directions Duration : 6HRS(3x2HRS)	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage															
Shock	IEC 60738-1	Wave: half-sine ΔV : 1.0m/s Acceleration: 50 m/s ² Pulse time: 30ms	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage															
Rapid Change of Temperature	IEC 60738-1	The thermal shock conditions shown below shall be repeated 5 cycles <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> <th>Period(minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> <tr> <td>3</td> <td>85 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> </tbody> </table>	Step	Temperature(°C)	Period(minutes)	1	-40 ± 5	30 ± 3	2	Room temperature	5 ± 3	3	85 ± 5	30 ± 3	4	Room temperature	5 ± 3	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage
Step	Temperature(°C)	Period(minutes)																
1	-40 ± 5	30 ± 3																
2	Room temperature	5 ± 3																
3	85 ± 5	30 ± 3																
4	Room temperature	5 ± 3																
Climatic Sequence	IEC 60738-1	Dry heat: 125 °C for 16 hrs Damp heat first cycle: 40°C, 95% R.H ,cycle time: 24 hrs Cold: -40°C for 2 hrs Damp heat (cyclic), remaining cycles: 5 cycles Test according to IEC60068-2-30	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage															
Damp Heat, Steady State	IEC 60738-1	40±2°C, 90~95%RH, for 1000±2hrs	$\Delta R_{25}/R_{25}$ ≤ 20% No visible damage															
Lightning	specification standard	10/700 us , 6Kv , Rs=40Ω ; 10 times , with GDT (500V trip)	R-R0 /R0≤30%															
Power Cross	specification standard	220V , Rs=10/200/600Ω , 15min on , 5min off , 3 times respectively	R-R0 /R0≤30%															
Power Induction	specification standard	650V , Rs=600Ω , 1S on , 300S off , 15 times	R-R0 /R0≤30%															

Soldering Recommendation

■ IR-Reflow Soldering Profile

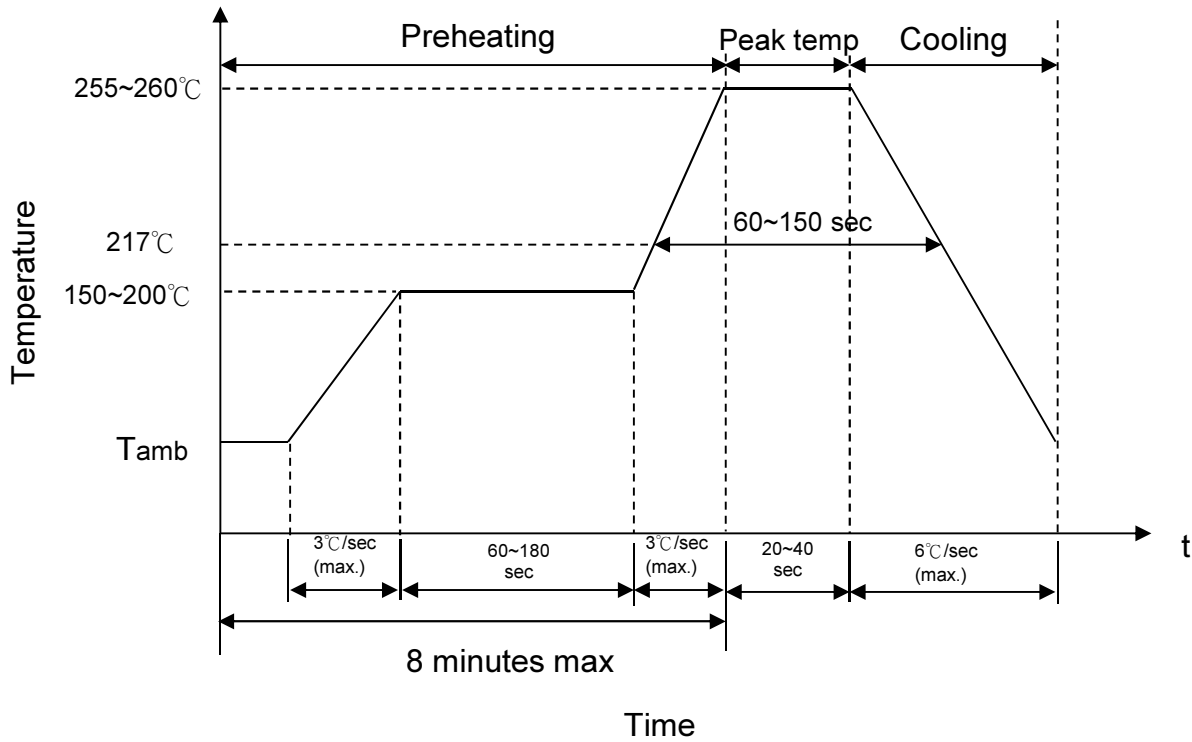

■ Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 sec (max.)
Distance from Thermistor	2 mm (min.)

RoHS Compliant Declaration

We hereby declare that the components delivered to your company are compliant with RoHS directive 2015/863/EU.

Warehouse Storage Conditions of Products

(I) Storage Conditions :

- 1.Storage Temperature : $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- 2.Relative Humidity : $\leq 75\% \text{RH}$
- 3.Keep away from corrosive atmosphere and sunlight.

(II) Period of Storage : 1 year

Safety Approvals (Certified Model/Type :PPL07100MA0B5)



* UL 1434 / cUL recognized (File # E138827)



* TUV recognized (File # R50171789)

Certificates

- (1) IATF 16949 certificate
- (2) ISO 9001 certificate

Test Report

- (1) RoHS test report

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PTC \(Positive Temperature Coefficient\) Thermistors](#) category:

Click to view products by [TKS](#) manufacturer:

Other Similar products are found below :

[PTCAUX7-36-5C](#) [PTCCL09H251FBE](#) [PTCTL3MR100GTE](#) [B59346A1502P020](#) [B59860C 130A 70](#) [B59980C0160A070](#)
[PTCTT95R100GTE](#) [PTCLL05P131TBE](#) [B59841C0135A070](#) [TFPT0805L1800FV](#) [B59725T1120A062](#) [B59116S0225B010](#)
[B59008C0150A040](#) [B59100M1090A070](#) [B59100M1145A070](#) [B59873C0120A070](#) [102PS1G](#) [B59300M1150A070](#) [B59339A1501P020](#)
[B59770B0120A070](#) [B59955C0120A070](#) [B59995C0120A070](#) [YQR100R060](#) [YQS5751PTO](#) [YQS5856PTF](#) [YQS5930PTO](#) [YS5675](#)
[YS5918PTO](#) [YS5677](#) [YQS5898PTO](#) [YQS5868PTF](#) [YQD100N1000](#) [KTY82/222,215](#) [KTY81/110,112](#) [KTY81/210,112](#) [B59219J130A20](#)
[B59771B0120A070](#) [B59807A90A62](#) [B59641A0135A062](#) [B59960C160A70](#) [PTGL10ARR27M1B51A0](#) [P5005C090S500H](#) [YQD120N0025](#)
[PTGL12AS4R7K6B51B0](#) [PTGL12AR100M6C01B0](#) [PTGL07AS2R7K2B51A0](#) [PTGL07AS1R8K2B51B0](#) [PTGL13AR0R8H2B71B0](#)
[PTGL12AR1R2H2B51B0](#) [PTGL10AR3R9M3P51B0](#)