

# PPTC RESETTALBE FUSES




## FSMD0603 Series

### Features

- ◆ Surface Mount Devices
- ◆ Standard 0603mils footprint
- ◆ Surface mount packaging for automated assembly
- ◆ Compatible with Pb and Pb-free solder re flow profiles
- ◆ UL(Pending), C-UL(Pending), TUV(Pending)
- ◆ RoHS, Reach, HF compliance

### Applications


- ◆ Mobile phones
- ◆ PC motherboards
- ◆ P DA' s/Digital cameras
- ◆ USB port protection
- ◆ HDMI source protection



### 电气特性：

P/N	保持电流	跳脱电流	最大电压	最大电流	最大动作时间		消耗功率	电阻范围 (Ω)	
	$I_H$ (A)	$I_T$ (A)	$V_{max}$ (V)	$I_{max}$ (A)	(A)	(Sec.)	$P_{d\ typ}$ (W)	$R_{min}$	$R1_{max}$
TLC-FSMD010	0.10	0.30	15	40	0.50	1.00	0.50	0.90	6.00
TLC-FSMD020	0.20	0.50	9	40	1.00	0.60	0.50	0.55	3.50
TLC-FSMD035	0.35	0.75	6	40	8.00	0.10	0.50	0.20	1.40
TLC-FSMD050	0.50	1.00	6	40	8.00	0.10	0.50	0.10	0.80

### 产品尺寸 (Unit: mm)：

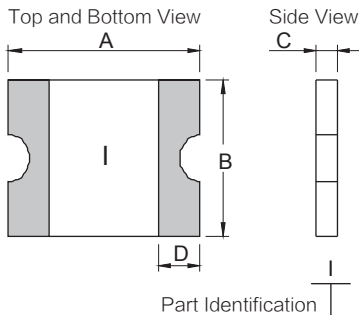

P/N	Marking (标识)	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
TLC-FSMD010	I	1.45	1.85	0.65	1.05	0.35	0.85	0.20
TLC-FSMD020	-	1.45	1.85	0.65	1.05	0.30	0.75	0.20
TLC-FSMD035	II	1.45	1.85	0.65	1.05	0.30	0.75	0.20
TLC-FSMD050	●	1.45	1.85	0.65	1.05	0.60	1.00	0.20

### 环境温度与工作电流关系特性曲线：

P/N	工作环境温度								
	-40℃	-20℃	0℃	25℃	40℃	50℃	60℃	70℃	85℃
TLC-FSMD010	0.13	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
TLC-FSMD020	0.27	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
TLC-FSMD035	0.47	0.41	0.38	0.35	0.29	0.26	0.24	0.20	0.14
TLC-FSMD050	0.67	0.59	0.54	0.50	0.41	0.37	0.34	0.29	0.20

# PPTC RESETTALBE FUSES




电路保护元器件专业制造商

Revision: A  
Date: 2018-04-24  
No.: 1 OF 2



## FSMD0603 Series

### 动作电流时间曲线表 :

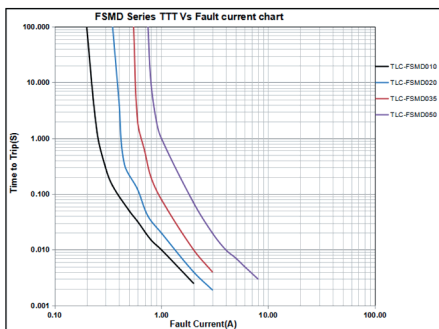

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

### 标准包装数量 :

Model	Qty/Reel
TLC-FSMD010~TLC-FSMD035	5000pcs
TLC-FSMD050	4000pcs

Note: Reel packaging per EIA-481-1 standard

### 6、Agency Recognition:



Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame. Specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC category](#):*

*Click to view products by [TLC manufacturer](#):*

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3341-000](#) [RF3344-000](#) [RF3382-000](#) [SMD125-2](#) [RF2171-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [BK60-017-DZ-E0.6](#) [F95456-000](#) [LVR100S](#) [RS30-090](#) [RS30-110](#) [RS30-600](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-250](#) [ASMD0603-010-30V](#) [ASMD0603-025-16V](#) [ASMD2920-260-24V](#) [BSMD0603-025-12V](#) [BSMD1206-150-12V](#) [BSMD0805-020-33V](#) [BSMD1206-075-13.2V](#) [BSMD2920-400-6V](#) [BSMD2920-300-6V](#) [BSMD2920-700-6V](#)