

POLYMER PTC RESETTABLE FUSE




Part Number: TRA110-8

1、Physical Dimensions

Unit:mm

| Part Number | A | B | C | D | E | Lead |
|-------------|-----|------|-----|-------|-----|------|
| | Max | Max | TYP | Nor | Max | Φ |
| TRA110-8 | 7.4 | 13.0 | 5.1 | 6.5±1 | 3.1 | 0.50 |



Logo
 A 110 Holding Current
 Max.Interrupt voltage
 XX Lot No.

2、Electrical Characteristics

| Part Number | I _H (A) | I _T (A) | V _{max} (V) | I _{max} (A) | T _{trip} (Max time to trip) | | Pd _{typ} (W) | R _{min} (Ω) | R _{max} (Ω) | R1 _{max} (Ω) |
|-------------|-----------------------|-----------------------|-------------------------|-------------------------|---|---------|--------------------------|-------------------------|-------------------------|--------------------------|
| | | | | | Current(A) | Time(S) | | | | |
| TRA110-8 | 1.10 | 2.20 | 16 | 40 | 5.50 | 5.0 | 0.54 | 0.050 | 0.095 | 0.150 |

I_H: Holding Current: maximum current at which the device will not trip in 25°C still air.

I_T: Tripping Current minimum current at which the device will trip in 25°C still air.

V_{max}: Maximum voltage device can withstand without damage at rated current.

I_{max}: Maximum fault current device can withstand without damage at rated voltage.

T_{trip}: Maximum time to trip(s) at assigned current.

Pd_{typ}: Rated working power.

R_{min}: Minimum resistance of device prior to trip at 25°C.


R_{max}: Maximum resistance of device prior to trip at 25°C.

R1_{max}: Maximum resistance of device is measured one hours post reflow at 25°C.

3、Thermal Derating

| Part Number | Ambient Operating Temperature | | | | | | | | |
|-------------|-------------------------------|-------|------|------|------|------|------|------|------|
| | -40°C | -20°C | 0°C | 25°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| TRA110-8 | 1.61 | 1.43 | 1.24 | 1.10 | 0.89 | 0.83 | 0.74 | 0.66 | 0.56 |

4、Wave Soldering Parameters

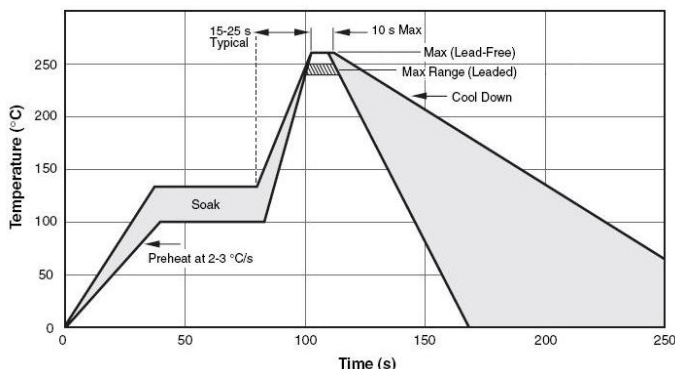

| Profile Feature | Condition |
|---|----------------------------|
| Average Ramp-Up Rate (T _{smax} to TP) | 4°C/second max. |
| Preheat | |
| -Temperature Min (T _{smin}) | 100°C |
| -Temperature Max (T _{smax}) | 125°C |
| -Time (T _{smin} to T _{smax}) | 60-180 seconds |
| Peak Temperature (TP) | 265°C |
| Max Time at Peak Temperature (t _P) | 5 seconds |
| Ramp-Down Rate | 6 °C /second max. |
| Time 25°C to Peak Temperature | 5 minutes max. |
| Storage Condition | 0°C ~35°C, ≦70%RH, 2 Years |

5、Package Information

Packing quantity: 1000pcs/bag

6、Agency Recognition: TUV



Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame. Specifications are subject to change without notice.

TEL: 86-0769-3892 0554 FAX: 86-0769-8793 2077 E-mail: sales@tlcet.com.cn

Address: No.18, 5th GaoLi Road, TangXia Town, DongGuan, GuangDong, P.R China 523710

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [TLC manufacturer](#):

Other Similar products are found below :

[0001.1010.G](#) [D38999/20WG39JN](#) [F02B250V1-4AS](#) [9728214S-2\(621\)](#) [RF0627-000](#) [RF2534-000](#) [ASMD185-2](#) [EN2997S61212AN](#)
[EN2997SE61203AN](#) [BK-ABC-V-5-R](#) [LR4-550RAF](#) [SMD125-2](#) [F60C500V20AS](#) [RF0078-000](#) [RF1548-000](#) [RF1973-000](#) [RF2171-000](#)
[RF2531-000](#) [RF2533-000](#) [RF2550-000](#) [TR600-150Q-B-0.5-0.130](#) [BK-AGX-20](#) [5E4795/04-1502](#) [EN2997S61212MN](#) [EN2997SE61203MN](#)
[EN2997SE61212AN](#) [EN2997SE61212MN](#) [BK1/S505-1.25-R](#) [TR-3216FF20-R](#) [TRF250-080T-B-1.0-0.125](#) [JT06RT1832BN014](#) [S-3-2-10](#)
[SMD100-2](#) [FRN-R-5-6-10](#) [FRS-R-3-2-10](#) [LP-CC-2-1-2](#) [LPS-RK-3-2-10SP](#) [BK-AGC-1-8-R](#) [BK-AGC-2-10-R](#) [BK-AGC-7-1-2](#) [BK-GDC-](#)
[500MA](#) [BK-MDL-1-6-10-R](#) [BK-SFE-4](#) [BK-ABC-1-R](#) [BK-C518-250-R](#) [BK-GDB-2A](#) [BK-MDL-1-8-R](#) [BK-MDL-6](#) [BK-AGC-5-R](#) [BK-ATC-](#)