



TRC(60/72V) Series


Features

- ◆ Radial Leaded Devices
- ◆ Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirements
- ◆ Bulk Package, or tape and reel available on most models
- ◆ UL(Pending), C-UL(Pending), TUV(R50322003)
- ◆ RoHS, Reach, HF compliance

Applications

Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:

- ◆ Personal computer
- ◆ Toys
- ◆ Industrial controls



电气特性：

P/N	保持电流	跳脱电流	最大电压	最大电流	最大动作时间		消耗功率	电阻范围 (Ω)		
	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	(A)	(Sec.)	Pd_{typ} (W)	R_{min}	R_{max}	$R1_{max}$
TRC005	0.05	0.15	60	40	0.25	5.0	0.22	7.30	11.10	25.00
TRC010	0.10	0.20	60	40	0.50	4.0	0.38	2.30	8.10	12.0
TRC017	0.17	0.34	60/72	40	0.85	3.0	0.48	2.00	5.21	8.00
TRC020	0.20	0.40	60/72	40	1.00	2.2	0.40	1.30	2.84	4.50
TRC025	0.25	0.50	60/72	40	1.25	2.5	0.45	0.90	1.95	3.00
TRC030	0.30	0.60	60/72	40	1.50	3.0	0.50	0.70	1.36	2.10
TRC040	0.40	0.80	60/72	40	2.00	3.8	0.55	0.48	0.95	1.40
TRC050	0.50	1.00	60/72	40	2.50	4.0	0.75	0.38	0.78	1.20
TRC065	0.65	1.30	60/72	40	3.25	5.3	0.90	0.24	0.54	0.74
TRC075	0.75	1.50	60/72	40	3.75	6.3	0.90	0.23	0.45	0.62
TRC090	0.90	1.80	60/72	40	4.50	7.2	1.00	0.14	0.31	0.49
TRC110	1.10	2.20	60/72	40	5.50	8.2	1.50	0.15	0.25	0.40
TRC135	1.35	2.70	60/72	40	6.75	9.6	1.70	0.12	0.19	0.32
TRC160	1.60	3.20	60/72	40	8.00	11.4	1.90	0.09	0.14	0.24
TRC185	1.85	3.70	60/72	40	9.25	12.6	2.10	0.08	0.12	0.21
TRC250	2.50	5.00	60/72	40	12.50	15.6	2.50	0.05	0.08	0.15
TRC300	3.00	6.00	60/72	40	15.00	19.8	2.80	0.04	0.06	0.12
TRC375	3.75	7.50	60/72	40	18.75	24.0	3.20	0.03	0.05	0.10
TRC500	5.0	10.0	60/72	40	25.0	24.0	3.2	0.02	0.05	0.100

PPTC RESETTALBE FUSES




电路保护元器件专业制造商

Revision: A
Date: 2018-04-24
No.: 1 OF 2




TRC(60/72V) Series


产品尺寸 (Unit: mm) :



Style1



Style2

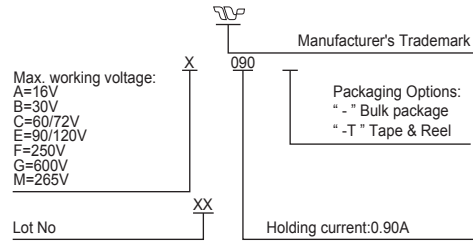

P/N	A	B	C	D	E	物理特性		
	Max.(最大)	Max.(最大)	Typ.(标准)	Min.(最小)	Max.(最大)	Style(样式)	Lead Φ mm	Material(材料)
TRC005	7.4	12.7	5.1	7.6	3.1	1	0.50	CP
TRC010	7.4	12.7	5.1	7.6	3.1	1	0.50	CP
TRC017	7.4	12.7	5.1	7.6	3.1	1	0.50	CP
TRC020	7.4	12.7	5.1	7.6	3.1	1	0.50	CP
TRC025	7.4	12.7	5.1	7.6	3.1	1	0.50	CP
TRC030	7.4	13.4	5.1	7.6	3.1	1	0.50	CP
TRC040	9.7	14.5	5.1	7.6	3.1	1	0.50	CP
TRC050	9.7	15.2	5.1	7.6	3.1	1	0.60	Cu
TRC065	9.7	15.2	5.1	7.6	3.1	1	0.60	Cu
TRC075	10.4	16.0	5.1	7.6	3.1	1	0.60	Cu
TRC090	11.7	16.7	5.1	7.6	3.1	1	0.60	Cu
TRC110	13.0	18.0	5.1	7.6	3.1	2	0.80	Cu
TRC135	14.5	19.6	5.1	7.6	3.1	2	0.80	Cu
TRC160	16.3	21.3	5.1	7.6	3.1	2	0.80	Cu
TRC185	17.8	22.9	5.1	7.6	3.1	2	0.80	Cu
TRC250	21.3	26.4	10.2	7.6	3.1	2	0.80	Cu
TRC300	24.9	30.0	10.2	7.6	3.1	2	0.80	Cu
TRC375	28.4	33.5	10.2	7.6	3.1	2	0.80	Cu
TRC500	28.4	33.5	10.2	7.6	3.1	2	0.80	Cu

TEL: 86-0769-3892 0554

FAX: 86-0769-8793 2077

E-mail:sales@tlcet.com.cn

Address:No.18,5th GaoLi Road,TangXia Town,DongGuan,GuangDong,P.R China 523710

PPTC RESETTALBE

FUSES



Revision: A
Date: 2018-04-24
No.: 1 OF 3




TRC(60/72V) Series

环境温度与工作电流关系特性曲线：

P/N	工作环境温度								
	-40℃	-20℃	0℃	25℃	40℃	50℃	60℃	70℃	85℃
TRC005	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02
TRC010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.04
TRC017	0.26	0.23	0.20	0.17	0.14	0.12	0.11	0.09	0.07
TRC020	0.31	0.27	0.24	0.20	0.16	0.14	0.13	0.11	0.08
TRC025	0.39	0.34	0.30	0.25	0.20	0.18	0.16	0.14	0.10
TRC030	0.47	0.41	0.36	0.30	0.24	0.22	0.19	0.16	0.12
TRC040	0.62	0.54	0.48	0.40	0.32	0.29	0.25	0.22	0.16
TRC050	0.78	0.68	0.60	0.50	0.41	0.36	0.32	0.27	0.20
TRC065	1.01	0.88	0.77	0.65	0.53	0.47	0.41	0.35	0.26
TRC075	1.16	1.02	0.89	0.75	0.61	0.54	0.47	0.41	0.30
TRC090	1.40	1.22	1.07	0.90	0.73	0.65	0.57	0.49	0.36
TRC110	1.71	1.50	1.31	1.10	0.89	0.79	0.69	0.59	0.44
TRC135	2.09	1.84	1.61	1.35	1.09	0.97	0.85	0.73	0.54
TRC160	2.48	2.18	1.90	1.60	1.30	1.15	1.01	0.86	0.64
TRC185	2.87	2.52	2.20	1.85	1.50	1.33	1.17	1.00	0.74
TRC250	3.88	3.40	2.98	2.50	2.03	1.80	1.58	1.35	1.00
TRC300	4.65	4.08	3.57	3.00	2.43	2.16	1.89	1.62	1.20
TRC375	5.81	5.10	4.46	3.75	3.04	2.70	2.36	2.03	1.50
TRC500	7.75	6.80	5.95	5.00	4.05	3.60	3.15	2.71	2.00

动作电流时间曲线表：

- A=TRC005
- B=TRC010
- C=TRC017
- D=TRC020
- E=TRC025
- F=TRC030
- G=TRC040
- H=TRC050
- I=TRC065
- J=TRC075
- K=TRC090
- L=TRC110
- M=TRC135
- N=TRC160
- O=TRC185
- P=TRC250
- Q=TRC300
- R=TRC375

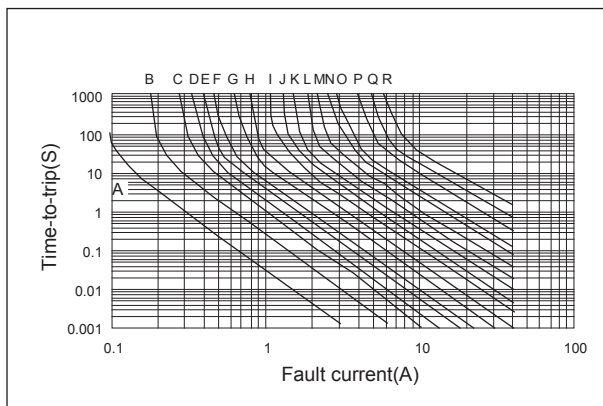

PPTC RESETTALBE FUSES



Revision: A
Date: 2018-04-24
No.: 1 OF 4



TRC(60/72V) Series

标准包装数量 :

Model	Q'ty/bag
TRC005-TRC090	1000pcs
TRC110-TRC185	500pcs
TRC250-TRC500	200pcs

Tape and Reel Specifications

Devices taped using EIA468 - B/IEC286-2 standards.

6、Agency Recognition:



Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame. Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [TLC manufacturer](#):

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3341-000](#) [RF3344-000](#) [RF3382-000](#) [SMD125-2](#) [RF2171-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [BK60-017-DZ-E0.6](#) [F95456-000](#) [LVR100S](#) [RS30-090](#) [RS30-110](#) [RS30-600](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-250](#) [ASMD0603-010-30V](#) [ASMD0603-025-16V](#) [ASMD2920-260-24V](#) [BSMD0603-025-12V](#) [BSMD1206-150-12V](#) [BSMD0805-020-33V](#) [BSMD1206-075-13.2V](#) [BSMD2920-400-6V](#) [BSMD2920-300-6V](#) [BSMD2920-700-6V](#)