





- + VDSL Transformer
- + RoHS compliance product
- + EN60950 Basic Insulation Compliant-250Vrms
- + Operating temperature range:-40°C to +85°C


Electrical Specifications @ 25°C

Part Number	Turns Ratio	OCL @10KHz 0.1V	LL @1MHz 0.1V	CWW @100KHz 0.1V	DCR		THD @30KHz 3.0 V	Hi-Pot
	1-4: 10-7 (2-3, 8-9 short)	1-4 (2-3 short)	1-4 (2-3, 7-8-9-10short)	1-10 (2-3, 8-9 short)	1-4 (2-3 short)	10-7 (8-9 short)	1-4TO10-7 (2-3, 8-9 short)	1,2-10,9
TDA149	2:1±5%	420uH ±10%	1.5 uH max	120PF	2.0Ω MAX.	1.0Ω MAX.	-85dB MAX	1875VAC/2S/1mA

Mechanical

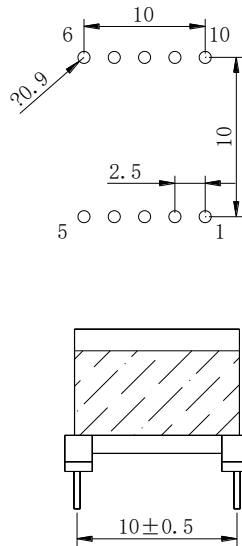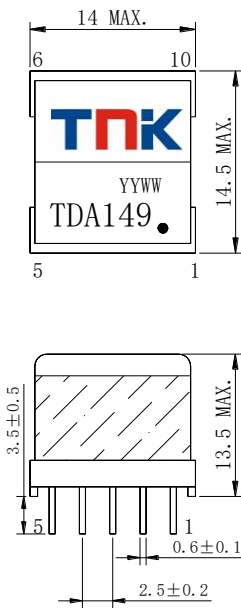

Schematics

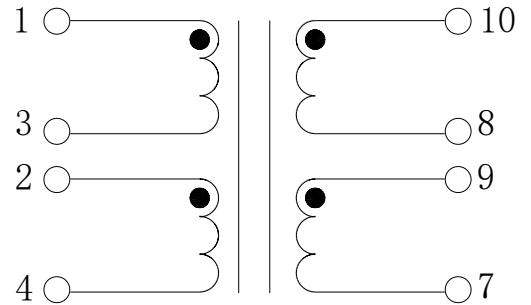

NOTE:

- 1、Dimensions:mm;
- 2、 Unless otherwise specified,tolerances:±0.25(mm);

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [TNK](#) manufacturer:

Other Similar products are found below :

[749023020](#) [CU4S0506AT-2655-H1](#) [MET-58](#) [PE-64961](#) [H5008FNL](#) [H5020FNLT](#) [H5079NLT](#) [1879479-1](#) [1879564-1](#) [PA1277NLT](#)
[PA1528ANL](#) [PA2007NLT](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [HX1234NLT](#) [HX5008FNLT](#)
[100B-1001XNL](#) [PA1282NLT](#) [HX5084FNL](#) [T1108NLT](#) [2-1879391-5](#) [TTC-266-2](#) [3-1879385-4](#) [PA1032NL](#) [H2009FNLT](#) [PA0801NLT](#)
[TTC-266](#) [X-1619](#) [SM51295PEL](#) [T5008NLT](#) [PE-68517T](#) [HX1294NLT](#) [HX5084FNLT](#) [H5015FNLT](#) [H6080NLT](#) [CX2024NL](#) [HX1294FNLT](#)
[TX1473NLT](#) [PE-69011NLT](#) [CX2047LNLT](#) [CX2043LNLT](#) [DCT20EFD-U32S003](#) [H5120NLT](#) [H7137FNLT](#) [H1259NLT](#)