




- VDSL Transformer
- RoHS Compliance Product
- EN60950 Compliant-250Vrms
- Operating temperature range:-40⁰C to +85⁰C

Electrical Specifications @ 25°C

Part Number	Turns Ratio	OCL @10KHz 100mV	CWW @100KHz 100mV	LL @100KHz 100mV	DCR		THD @30KHz 3V	Hi-Pot (VAC0.5mA 1Sec)
	1-4: 8-5 (2-3,6-7Short)	1-4 (2-3 short)	1-8 (2-3,6-7 short)	1-4 (2-3,8-7-6-5short)	1-4 (2-3short)	8-5 (6-7short)	1-4 TO 8-5 (2-3, 6-7 Short)	
TSA156	1.4:1±2%	430uH ±10%	35pFmax	1.0uH max	1.0Ω max	1.0Ω max	-60dB max	1875
	LB	LB	LB	IL	IL	IL	IL	IL
	12MHz	17MHz	30MHz	300KHz~8MHz	8MHz~30MHz	8MHz~30MHz	8MHz~30MHz	8MHz~30MHz
	-45dB MAX.	-42dB MAX.	-30dB MAX.	0.5dB MAX.	3.5dB MAX.	3.5dB MAX.	3.5dB MAX.	3.5dB MAX.

Mechanical

Schematic

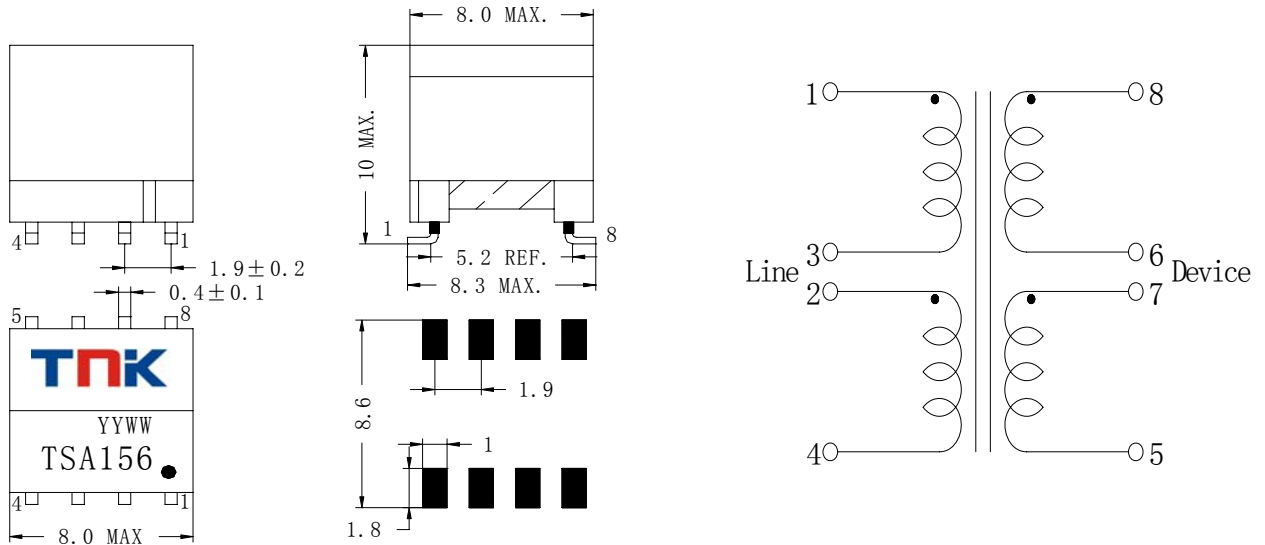

NOTE:

- 1、Dimensions:mm;
- 2、 Unless otherwise specified,tolerances:±0.25(mm);

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [TNK](#) manufacturer:

Other Similar products are found below :

[749023020](#) [CU4S0506AT-2655-H1](#) [MET-58](#) [PE-64961](#) [H5008FNL](#) [H5020FNLT](#) [H5079NLT](#) [1879479-1](#) [1879564-1](#) [PA1277NLT](#)
[PA1528ANL](#) [PA2007NLT](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [HX1234NLT](#) [HX5008FNLT](#)
[100B-1001XNL](#) [PA1282NLT](#) [HX5084FNL](#) [T1108NLT](#) [2-1879391-5](#) [TTC-266-2](#) [3-1879385-4](#) [PA1032NL](#) [H2009FNLT](#) [PA0801NLT](#)
[TTC-266](#) [X-1619](#) [SM51295PEL](#) [T5008NLT](#) [PE-68517T](#) [HX1294NLT](#) [HX5084FNLT](#) [H5015FNLT](#) [H6080NLT](#) [CX2024NL](#) [HX1294FNLT](#)
[TX1473NLT](#) [PE-69011NLT](#) [CX2047LNLT](#) [CX2043LNLT](#) [DCT20EFD-U32S003](#) [H5120NLT](#) [H7137FNLT](#) [H1259NLT](#)