

Features

- High Blocking Voltage with Low On-Resistance
- High Speed Switching with Low Capacitances
- Easy to Parallel and Simple to Drive
- Avalanche Ruggedness
- Halogen Free, RoHS Compliant



Benefits

- Higher System Efficiency
- Reduced Cooling Requirements
- Increased Power Density
- Increased System Switching Frequency

Applications

- Solar Inverters
- Switch Mode Power Supplies
- High Voltage DC/DC Converters
- Battery Chargers
- Motor Drives
- Pulsed Power applications

Package



Maximum Ratings ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
V_{DSmax}	Drain - Source Voltage	650	V	$V_{GS}=0V, I_D=100\mu A$	
V_{GSmax}	Gate - Source Voltage	-10/+25	V	Absolute maximum values	
V_{GSop}	Gate - Source Voltage	-5/+20	V	Recommended operational values	
I_D	Continuous Drain Current	30 22	A	$V_{GS}=20V, T_C=25^\circ\text{C}$ $V_{GS}=20V, T_C=100^\circ\text{C}$	
P_D	Power Dissipation	171	W	$T_C=25^\circ\text{C}, T_J=150^\circ\text{C}$	Fig. 10
T_J, T_{stg}	Operating Junction and Storage Temperature	-55 to +175	$^\circ\text{C}$		

Electrical Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	650			V	$V_{GS}=0V, I_D=100\mu A$	
$V_{GS(th)}$	Gate Threshold Voltage	1.80	2.30	3.50	V	$V_{GS}=V_{DS}, I_{DS}=5mA, T_C=25^\circ C$	Fig. 6
			1.55			$V_{GS}=V_{DS}, I_{DS}=5mA, T_C=175^\circ C$	
I_{DSS}	Zero Gate Voltage Drain Current		2	100	μA	$V_{DS}=650V, V_{GS}=0V$	
I_{GSS}	Gate-Source Leakage Current		50	200	nA	$V_{GS}=20V, V_{DS}=0V$	
$R_{DS(on)}$	Drain-Source on-state Resistance		65	80	m Ω	$V_{GS}=20V, I_D=20A, T_C=25^\circ C$	Fig. 4
			95			$V_{GS}=20V, I_D=20A, T_C=175^\circ C$	
g_{fs}	Transconductance		4.7		S	$V_{GS}=20V, I_D=20A, T_J=25^\circ C$	Fig. 5
			5.9			$V_{GS}=20V, I_D=20A, T_J=175^\circ C$	
C_{iss}	Input Capacitance		1700		pF	$V_{GS}=0V, V_{DS}=1000V, f=1MHz$ $V_{AC}=25mV$	Fig. 8
C_{oss}	Output Capacitance		172				
C_{rss}	Reverse Transfer Capacitance		77				
E_{ON}	Turn-On Switching Energy		140		μJ	$V_{DS}=400V, V_{GS}=-5/20V, I_D=10A,$ $R_{G(ext)}=5\Omega, L=142\mu H$	
E_{OFF}	Turn-Off Switching Energy		32				
$t_{d(on)}$	Turn-On Delay Time		15		ns	$V_{DD}=400V, V_{GS}=-0/20V$ $I_D=10A, R_{G(ext)}=5\Omega,$ $R_L=40\Omega, \text{Timing relative to VDS}$	
t_r	Rise Time		45				
$t_{d(off)}$	Turn-Off Delay Time		13				
t_f	Fall Time		10				
$R_{G(int)}$	Internal Gate Resistance		2.0		Ω	$f=1MHz, V_{AC}=25mV$	
Q_{gs}	Gate to Source Charge		18		nC	$V_{DD}=400V, V_{GS}=-0/20V$ $I_D=10A$	Fig. 9
Q_{gd}	Gate to Drain Charge		19				
Q_g	Total Gate Charge		65				

Reverse Diode Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_{SD}	Diode Forward Voltage	7.1		V	$V_{GS}=-5V, I_{SD}=6.6A, T_J=25^\circ C$	Fig. 7
		6.5		V	$V_{GS}=-5V, I_{SD}=6.6A, T_J=175^\circ C$	
I_S	Continuous Diode Forward Current	20		A	$T_C=25^\circ C$	

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Test Conditions	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.73	$^\circ C/W$		Fig. 11
$R_{\theta JA}$	Thermal Resistance From Junction to Ambient	35			

Typical Performance

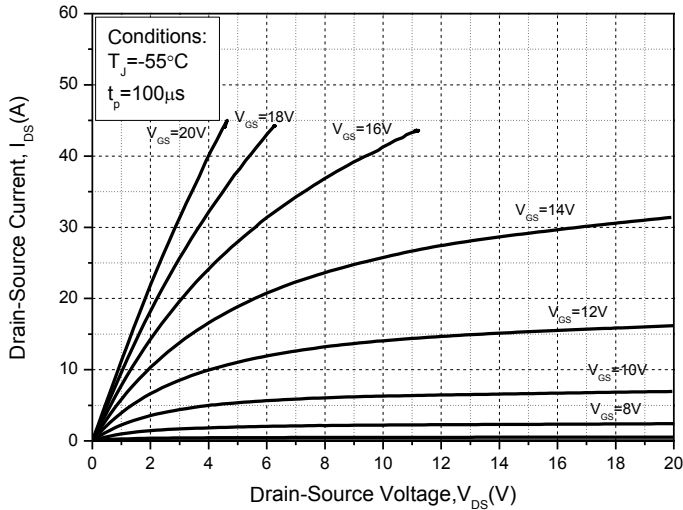


Figure 1. Output Characteristics $T_J = -40\text{ }^\circ\text{C}$

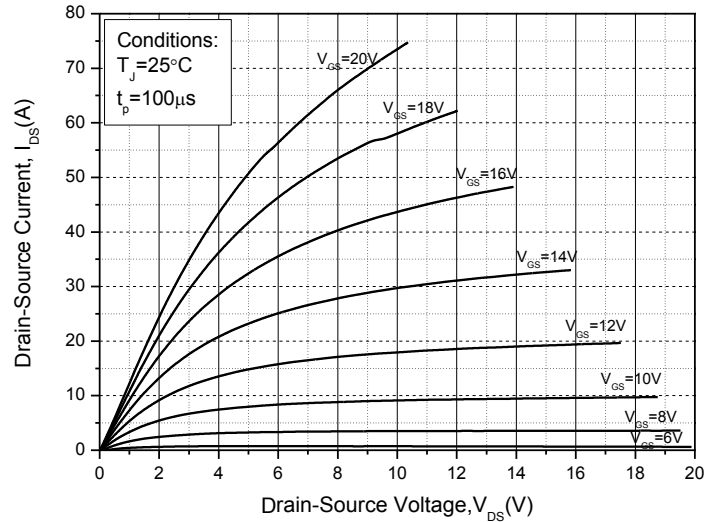


Figure 2. Output Characteristics $T_J = 25\text{ }^\circ\text{C}$

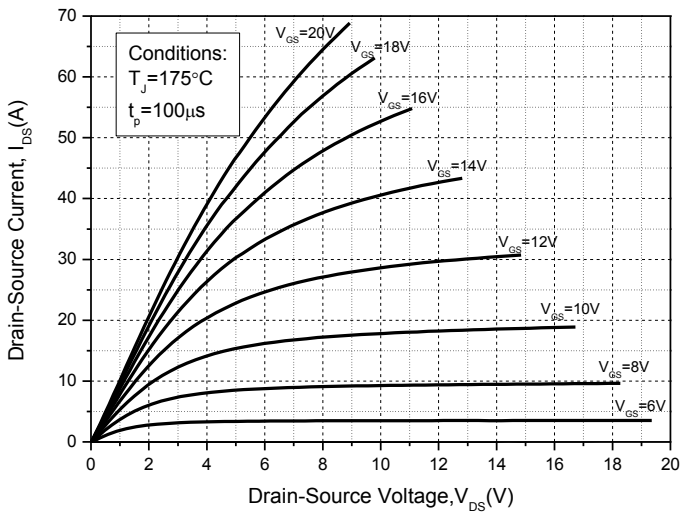


Figure 3. Output Characteristics $T_J = 175\text{ }^\circ\text{C}$

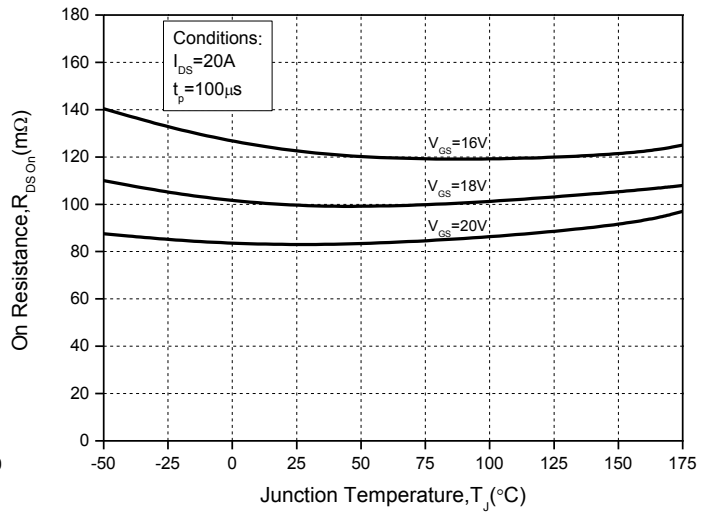


Figure 4. On-Resistance For Various Gate Voltage

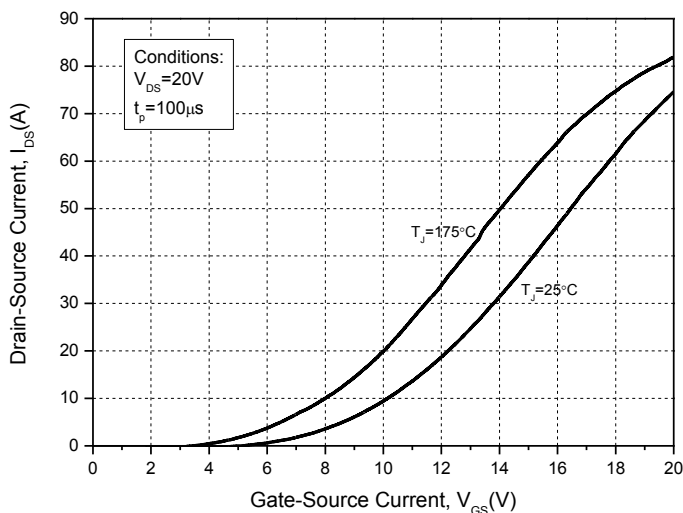


Figure 5. Transfer Characteristic for Various Junction Temperatures

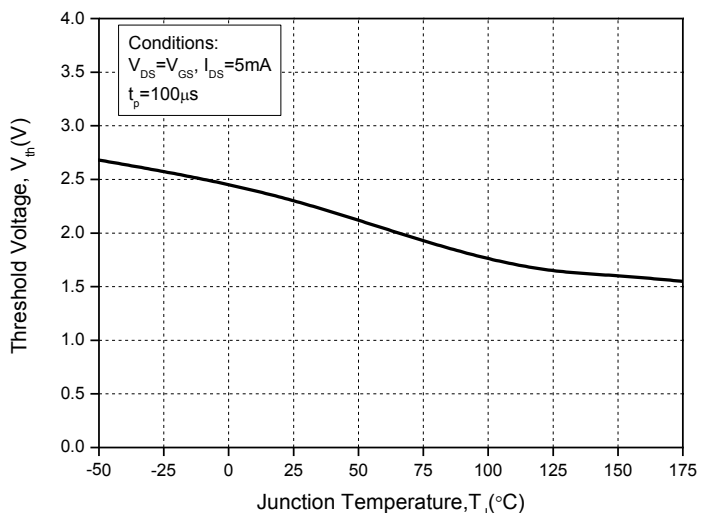


Figure 6. Threshold Voltage vs. Temperature

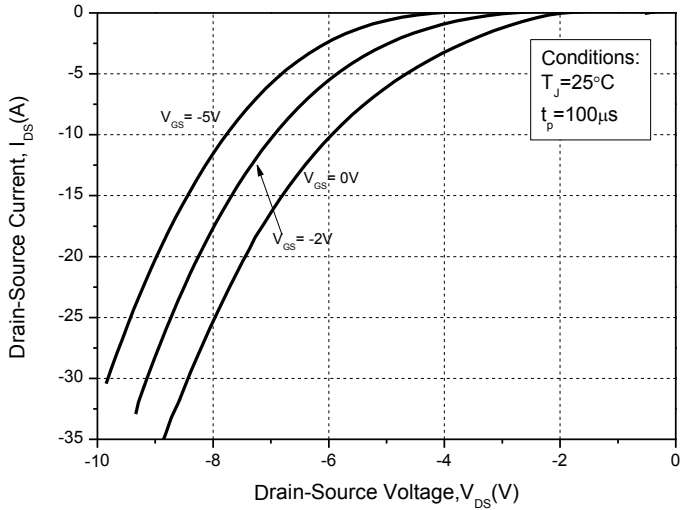


Figure 7. Body Diode Characteristics

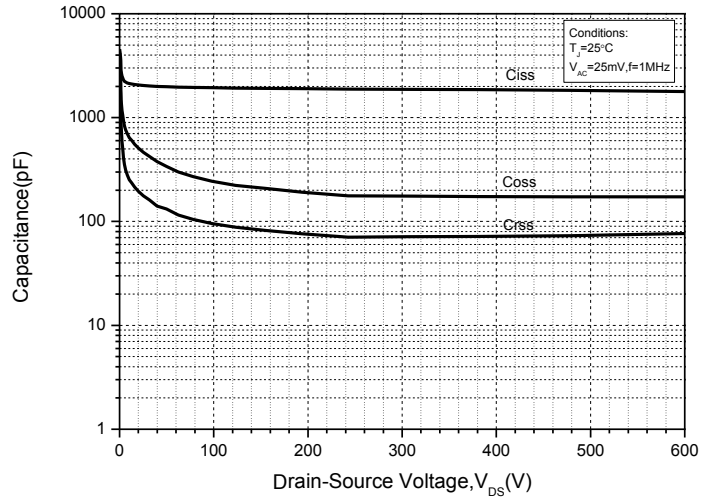


Figure 8. Capacitances vs. Drain-Source Voltage

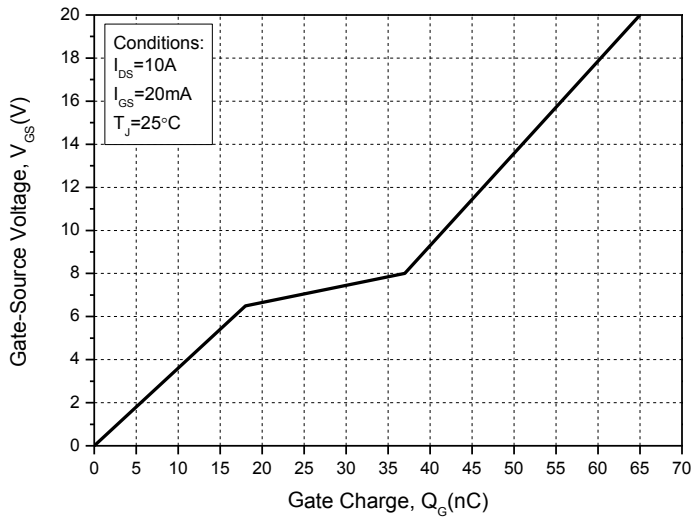


Figure 9. Gate Charge Characteristics

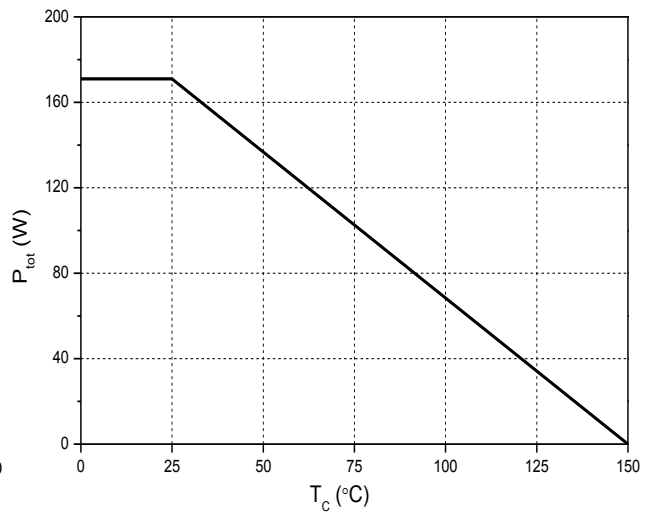


Figure 10. Power Dissipation Derating


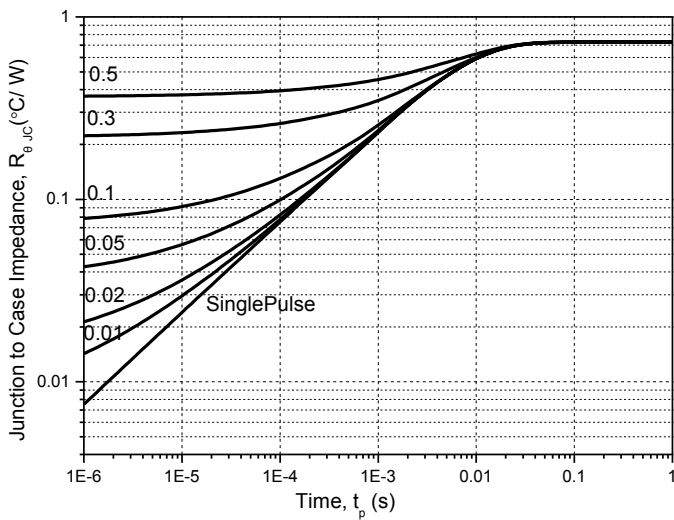


Figure 11. Transient Thermal Impedance

Package Dimensions: TO-247-3L

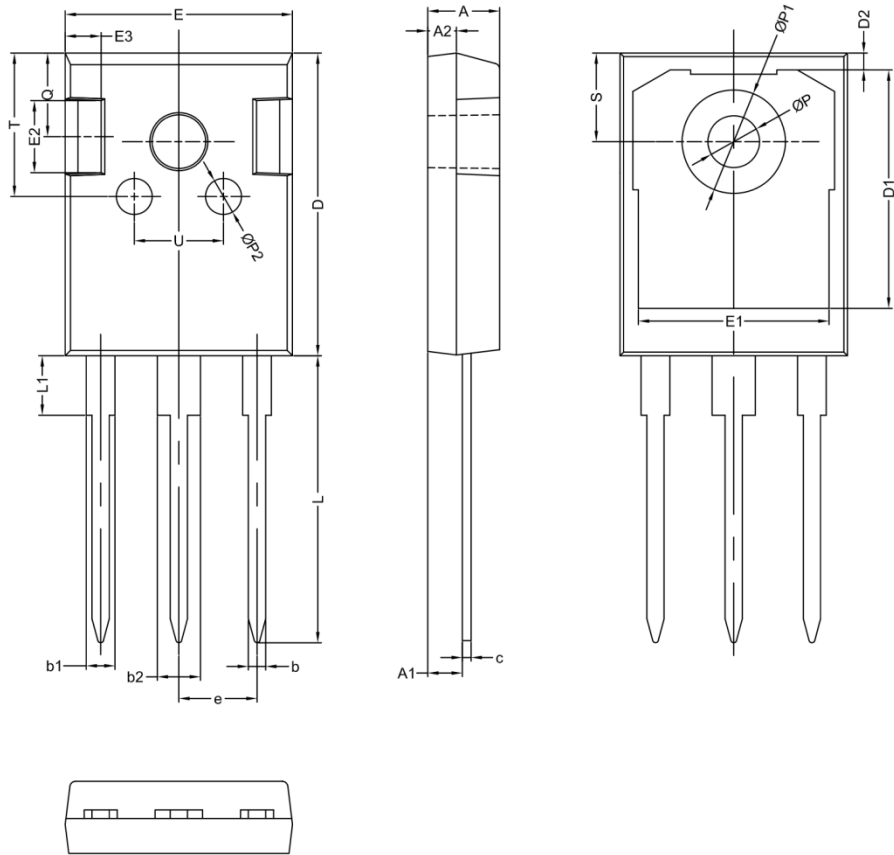

符号	机械尺寸/mm		
	最小值	典型值	最大值
A	4.80	5.00	5.20
A1	2.21	2.41	2.61
A2	1.90	2.00	2.10
b	1.10	1.20	1.35
b1		2.00	
b2		3.00	
c	0.55	0.60	0.75
D	20.80	21.00	21.20
D1		16.55	
D2		1.20	
E	15.60	15.80	16.0
E1		13.30	
E2		5.00	
E3		2.50	
e		5.44	
L	19.42	19.92	20.42
L1		4.13	
P	3.50	3.60	3.70
P1	-	-	7.40
P2		2.50	
Q		5.80	
S	6.05	6.15	6.25
T		10.00	
U		6.20	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Tokmas](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)