


Main features

| Symbol | Value | Unit |
|-------------------|-------|------|
| $I_{T(RMS)}$ | 16 | A |
| V_{DRM}/V_{RRM} | 800 | V |
| $I_{GT (Q1)}$ | 35 | mA |

Description

Specifically designed to operate at 150° C, the new 16 A CIQ1680 Triacs provide an enhanced performance in terms of power loss and thermal dissipation. This facilitates the optimization of heatsink dimensioning, leading to improved space and cost effectiveness when compared to electro-mechanical solutions.

The CIQ1680 Triacs are also suitable for use in high temperature environment found in hot appliances such as cookers, ovens, hobs, electric heaters, and coffee machines.

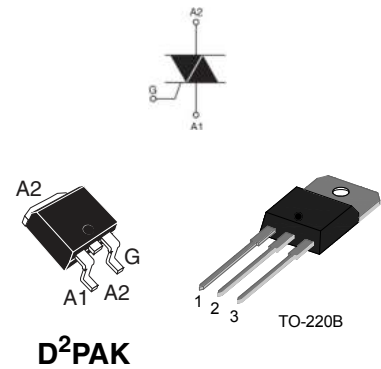

1 Characteristics

Table 1. Absolute maximum ratings

| Symbol | Parameter | | | Value | Unit |
|--------------------|--|------------------------|---------------------------|----------------------------|------------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave) | D ² PAK | $T_c = 130^\circ\text{C}$ | 16 | A |
| I_{TSM} | Non repetitive surge peak on-state current (full cycle sine wave, T_j initial = 25°C) | F = 60 Hz | t = 16.7 ms | 170 | A |
| | | F = 50 Hz | t = 20 ms | 160 | |
| I _{2t} | I _{2t} Value for fusing | tp = 10 ms | | 100 | A ² S |
| di/dt | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, tr ≤ 100 ns | F = 120 Hz | $T_j = 150^\circ\text{C}$ | 50 | A/μs |
| V_{DSM}/V_{RSM} | Non repetitive surge peak off state voltage | | $T_j = 25^\circ\text{C}$ | 800 | V |
| I_{GM} | Peak gate current | t _p = 20 μs | $T_j = 150^\circ\text{C}$ | 4 | A |
| $P_{G(AV)}$ | Average gate power dissipation | | $T_j = 150^\circ\text{C}$ | 1 | W |
| T_{stg} T_j | Storage junction temperature range Operating junction temperature range | | | -40 to +150 -40 to +150 | °C |

Table 2. Electrical characteristics ($T_j = 25^\circ\text{C}$, unless otherwise specified)

| Symbol | Test conditions | Quadrant | | Value | Unit |
|-------------------------------------|---|----------|-----|-------|------|
| $I_{GT}^{(1)}$ | $V_D = 12\text{ V}$, $R_L = 33\ \Omega$ | II - III | MAX | 35 | mA |
| V_{GT} | | II - III | MAX | 1.3 | V |
| V_{GD} | $V_D = V_{DRM}$, $R_L = 3.3\ \text{k}\Omega$ | II - III | MIN | 0.15 | V |
| $I_H^{(2)}$ | $I_T = 100\ \text{mA}$ | | MAX | 35 | mA |
| I_L | $I_G = 1.2 \times I_{GT}$ | I - III | MAX | 50 | mA |
| | | II | | 80 | |
| dV/dt ⁽²⁾ | $V_D = 67\% V_{DRM}$, gate open, $T_j = 150^\circ\text{C}$ | | MIN | 300 | V/μs |
| (di/dt) _c ⁽²⁾ | Without snubber, $T_j = 150^\circ\text{C}$ | | MIN | 7.1 | A/ms |

1. minimum I_{GT} is guaranteed at 5% of I_{GT} max

2. for both polarities of A2 referenced to A1

Table 3. Static electrical characteristics

| Symbol | Test conditions | | | Value | Unit |
|------------------------|---|-----------------------------|-----|-------|---------------|
| $V_{TM}^{(1)}$ | $I_{TM} = 22.5 \text{ A}$, $t_p = 380 \mu\text{s}$ | $T_j = 25^\circ \text{ C}$ | MAX | 1.5 | V |
| $V_{TO}^{(1)}$ | | $T_j = 150^\circ \text{ C}$ | MAX | 0.80 | V |
| $R_D^{(1)}$ | | $T_j = 150^\circ \text{ C}$ | MAX | 23 | m Ω |
| I_{DRM} I_{RRM} | $V_{DRM} = V_{RRM}$ | $T_j = 25^\circ \text{ C}$ | MAX | 5 | μA |
| | | $T_j = 150^\circ \text{ C}$ | | 6.4 | mA |
| | $V_D/V_R = 400 \text{ V (at peak mains voltage)}$ | $T_j = 150^\circ \text{ C}$ | | 4.2 | |

1. for both polarities of A2 referenced to A1

Table 4. Thermal resistance

| Symbol | Parameter | | Value | Unit |
|---------------|-----------------------|--------------------|-------|------|
| $R_{th(j-c)}$ | Junction to case (AC) | D ² PAK | 1.2 | °C/W |
| $R_{th(j-a)}$ | Junction to ambient | | 45 | |

Figure 1. Maximum power dissipation vs RMS on-state current (full cycle)

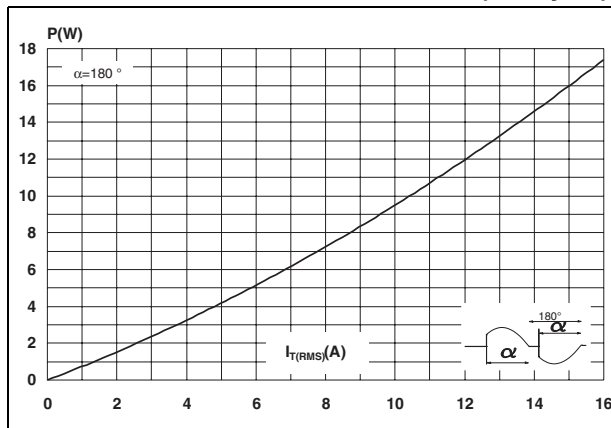


Figure 2. RMS on-state current vs case temperature (full cycle)

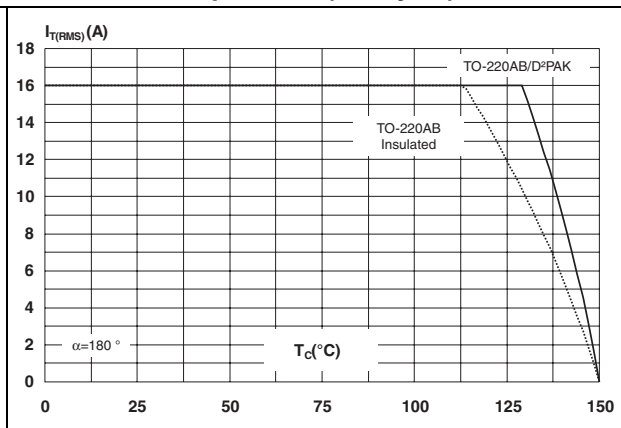


Figure 3. RMS on-state current vs ambient temperature, PCB FR4, $e_{CU} = 35 \mu m$

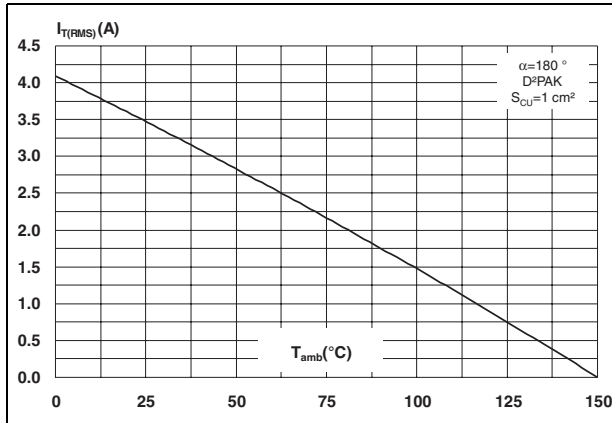


Figure 4. Relative variation of thermal impedance vs pulse duration

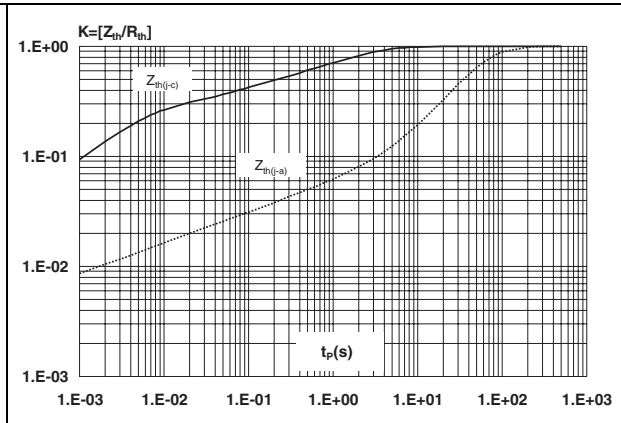


Figure 5. Relative variation of gate trigger current, holding current and latching current vs junction temperature (typical values)

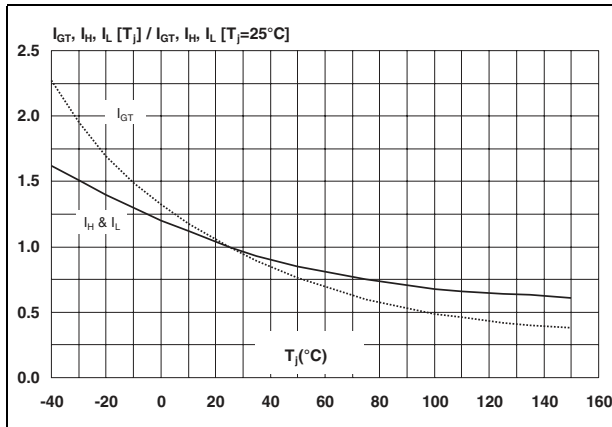


Figure 6. Surge peak on-state current vs number of cycles

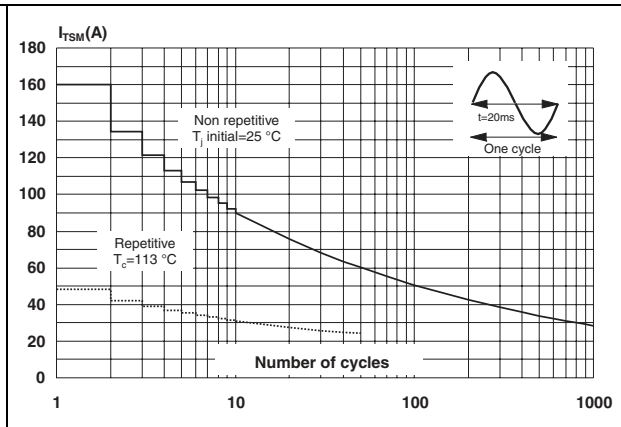


Figure 7. Non repetitive surge peak on-state current (sinusoidal pulse width $t_p < 10 ms$) and corresponding value of I^2t

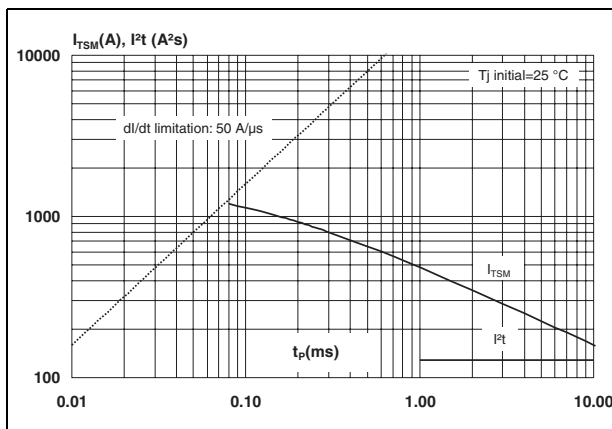


Figure 8. On-state characteristics (maximum values)

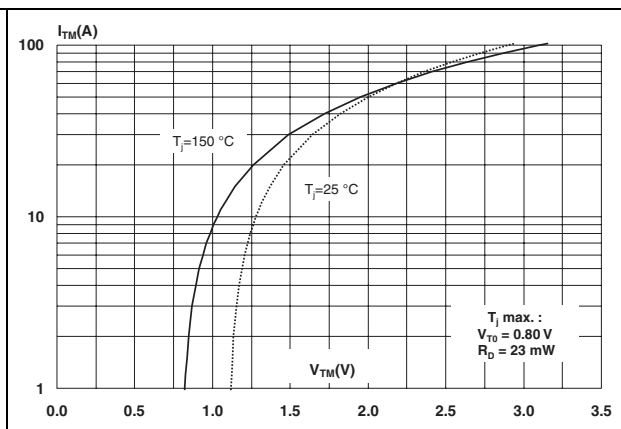


Figure 9. Relative variation of critical rate of decrease of main current $(di/dt)_c$ versus junction temperature

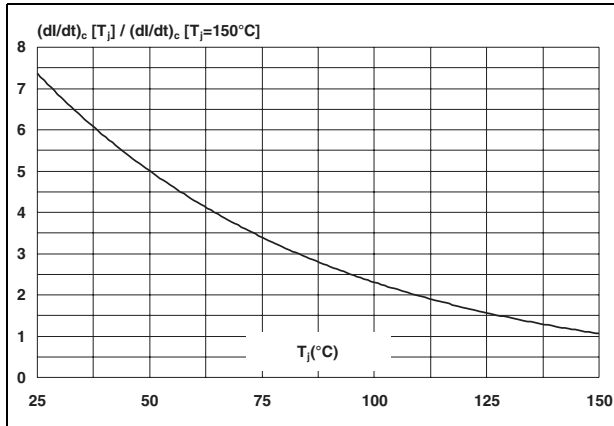


Figure 10. Relative variation of critical rate of decrease of main current $(di/dt)_c$ versus reapplied dV/dt (typical values)

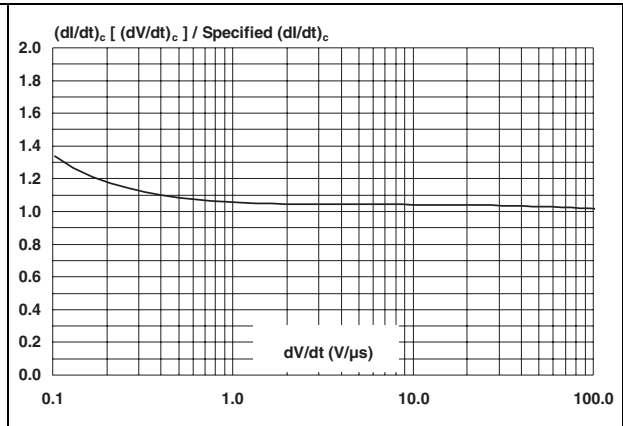


Figure 11. Variation of thermal resistance, junction to ambient versus copper surface under tab (PCB FR4, e_{Cu} 35 μm)

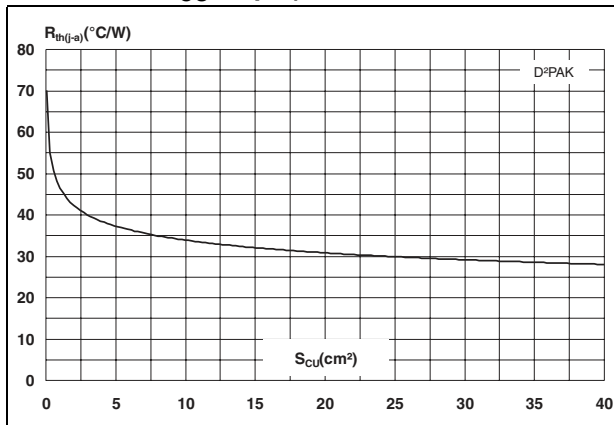


Figure 12. Leakage current versus junction temperature for different values of blocking voltage (typical values)

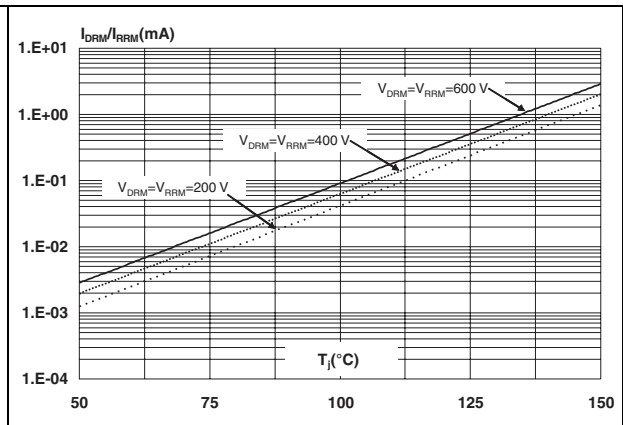


Figure 13. Acceptable repetitive peak off-state voltage versus case-ambient thermal resistance


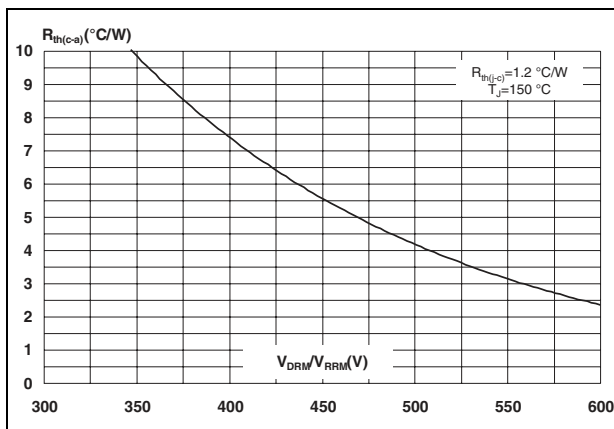


Table 5. D²PAK Mechanical data


| REF. | DIMENSIONS | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.40 | 4.60 | 0.173 | 0.181 |
| A1 | 2.49 | 2.69 | 0.098 | 0.106 |
| A2 | 0.03 | 0.23 | 0.001 | 0.009 |
| B | 0.70 | 0.93 | 0.027 | 0.037 |
| B2 | 1.14 | 1.70 | 0.045 | 0.067 |
| C | 0.45 | 0.60 | 0.017 | 0.024 |
| C2 | 1.23 | 1.36 | 0.048 | 0.054 |
| D | 8.95 | 9.35 | 0.352 | 0.368 |
| E | 10.00 | 10.40 | 0.393 | 0.409 |
| G | 4.88 | 5.28 | 0.192 | 0.208 |
| L | 15.00 | 15.85 | 0.590 | 0.624 |
| L2 | 1.27 | 1.40 | 0.050 | 0.055 |
| L3 | 1.40 | 1.75 | 0.055 | 0.069 |
| M | 2.40 | 3.20 | 0.094 | 0.126 |
| R | 0.40 typ. | | 0.016 typ. | |
| V2 | 0° | 8° | 0° | 8° |

Figure 14. D²PAK Footprint (dimensions in mm)



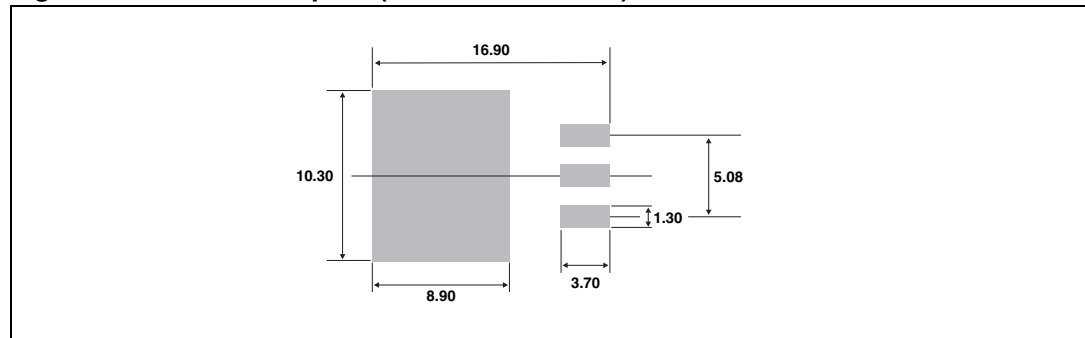

PACKAGE MECHANICAL DATA

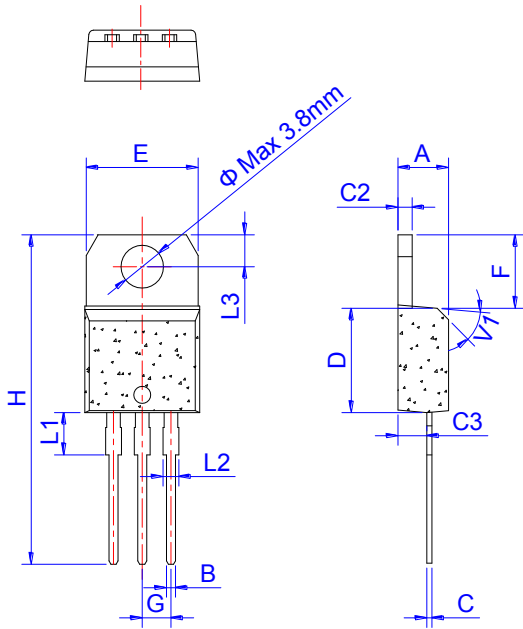

TO-220B

| Ref. | Dimensions | | | | | |
|------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| B | 0.61 | | 0.88 | 0.024 | | 0.035 |
| C | 0.46 | | 0.70 | 0.018 | | 0.028 |
| C2 | 1.21 | | 1.32 | 0.048 | | 0.052 |
| C3 | 2.40 | | 2.72 | 0.094 | | 0.107 |
| D | 8.60 | | 9.70 | 0.339 | | 0.382 |
| E | 9.80 | | 10.4 | 0.386 | | 0.409 |
| F | 6.55 | | 6.95 | 0.258 | | 0.274 |
| G | | 2.54 | | | 0.1 | |
| H | 28.0 | | 29.8 | 1.102 | | 1.173 |
| L1 | | 3.75 | | | 0.148 | |
| L2 | 1.14 | | 1.70 | 0.045 | | 0.067 |
| L3 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| V1 | | 45° | | | 45° | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [Tokmas](#) manufacturer:

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [BT136-600,127](#) [BT137B-800,118](#) [BTA140-600,127](#)
[BTA208-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA212B-800B,118](#) [BTA26-800CWRG](#) [BTA41-800BRG](#)
[TMA164P-L](#) [TMA166P-L](#) [TMA54S-L](#) [BT137-600E,127](#) [BTA140-800,127](#) [BTA30-600CW3G](#) [BTB16-600CW3G](#) [TMA84S-L](#)
[Z0109MN,135](#) [T825T-6I](#) [T1635T-6I](#) [T1220T-6I](#) [NTE5638](#) [ACST1235-8FP](#) [BT134-600D,127](#) [BT134-600G,127](#) [BT136X-600E,127](#)
[BT139X-800,127](#) [BTA204X-800C,127](#) [BTA208X-1000C0,127](#) [BTA216-600E,127](#) [BTA316X-600E/DG,12](#) [BTA316X-800C,127](#) [BT134-600D,127](#) [BT134-600E,127](#) [BT137X-600D,127](#) [BT139X-600E,127](#) [BTA08-600BW3G](#) [BTA201-800ER,126](#) [BTA208X-1000B,127](#)
[BTA316X-800E,127](#) [NTE56008](#) [NTE56017](#) [NTE56018](#)