

## N-Channel Enhancement Mode MOSFET

### 1. Product Information

#### 1.1 Features

**Surface-mounted package**  
**Super Trench**  
**T<sub>j</sub> max 175°C**  
**Advanced trench cell design**  
**MSL1**



#### 1.2 Applications

**Power Tool appliances**  
**BMS appliances**  
**High power inverter system**

#### 1.3 Quick reference

**$BV \geq 150\text{ V}$**   
 **$P_{\text{tot}} \leq 250\text{ W}$**   
 **$I_D \leq 220\text{ A}$**   
 **$R_{\text{DS(ON)}} \leq 5.0\text{m}\Omega @ V_{\text{GS}} = 10\text{ V}$**   
 **$R_{\text{DS(ON)}} \leq 6.0\text{m}\Omega @ V_{\text{GS}} = 6\text{ V}$**

### 2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 <p>Top View TO-263-7L</p>	
2,3	Source (S)		
4	Drain(D)		
5,6,7	Source (S)		

### 3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>DS</sub>	Drain-Source Voltage	T <sub>C</sub> = 25 °C	150	-	V
V <sub>GS</sub>	Gate-Source Voltage	T <sub>C</sub> = 25 °C	-	±25	V
I <sub>D</sub> *	Drain Current ( DC )	T <sub>C</sub> = 25 °C, V <sub>GS</sub> = 10 V	-	220	A
		T <sub>C</sub> = 100 °C, V <sub>GS</sub> = 10 V	-	98	A
I <sub>DM</sub> *	Drain Current ( Pulsed )	T <sub>C</sub> = 25 °C, V <sub>GS</sub> = 10 V	-	552	A
P <sub>tot</sub>	Drain power dissipation	T <sub>C</sub> = 25 °C	-	250	W
T <sub>stg</sub>	Storage Temperature		-55	175	°C
T <sub>J</sub>	Junction Temperature		-	175	°C
I <sub>S</sub>	Continuous-Source Current	T <sub>C</sub> = 25 °C	-	220	A
I <sub>AS</sub>	Single Pulsed Avalanche Current	V <sub>DD</sub> =100V , L=0.05mH	-	160	A
E <sub>AS</sub>	Single Pulsed Avalanche Energy	V <sub>DD</sub> =100V , L=1.0mH	-	1250	mJ
R <sub>θJA</sub> **	Thermal Resistance- Junction to Ambient		-	32	°C/W
R <sub>θJC</sub> **	Thermal Resistance- Junction to Case		-	0.45	

Notes :

- \* Pulse width ≤ 300 μs, duty cycle ≤ 2 %
- \*\* Surface Mounted on minimum footprint pad area.
- \*\*\* Limited by bonding wire

### 4. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
FDB0630N1507L	TO263-7L(D2-PAK)			800	

Note: NHCX defines " Green " as lead-free ( RoHS compliant ) and halogen free ( Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C )

## 5. Electrical Characteristics ( $T_A=25^\circ$ Unless Otherwise Noted )





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Static Characteristics</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 250\ \mu\text{A}$	150	-	-	V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{DS} = 250\ \mu\text{A}$	2	-	4	V
$I_{DSS}$	Drain Leakage Current	$V_{DS} = 120\text{ V}, V_{GS} = 0\text{ V}$	-	-	1	$\mu\text{A}$
$I_{GSS}$	Gate Leakage Current	$V_{GS} = 0\text{ V}, V_{GS} = \pm 25\text{ V}$	-	-	$\pm 100$	nA
$R_{DS(on)}^a$	On-State Resistance	$V_{GS} = 10\text{ V}, I_{DS} = 50\text{ A}$	-	4.5	5.0	m $\Omega$
		$V_{GS} = 6\text{ V}, I_{DS} = 25\text{ A}$	-	5.0	6.0	
<b>Diode Characteristics</b>						
$V_{SD}^a$	Diode Forward Voltage	$I_{SD} = 50\text{ A}, V_{GS} = 0\text{ V}$	-	-	1.3	V
$t_{rr}$	Reverse Recovery Time	$I_{DS} = 50\text{ A}, V_{GS} = 0\text{ V}$ $di_{SD}/dt = 100\text{ A}/\mu\text{s}$	-	115	-	nS
$Q_{rr}$	Reverse Recovery Charge		-	480	-	nC
<b>Dynamic Characteristics<sup>b</sup></b>						
$C_{iss}$	Input Capacitance	$V_{GS} = 0\text{ V}, V_{DS} = 75\text{ V}$ Frequency = 1 MHz	-	9320	-	pF
$C_{oss}$	Output Capacitance		-	570	-	
$C_{rss}$	Reverse Transfer Capacitance		-	60	-	
$t_{d(on)}$	Turn-on Delay Time	$V_{DS} = 75\text{ V}, V_{GEN} = 10\text{ V},$ $R_G = 3.9\ \Omega, R_L = 1.5\ \Omega,$ $I_{DS} = 50\text{ A}$	-	24	-	nS
$t_r$	Turn-on Rise Time		-	70	-	
$t_{d(off)}$	Turn-off Delay Time		-	112	-	
$t_f$	Turn-off Fall Time		-	75	-	
<b>Gate Charge Characteristics<sup>b</sup></b>						
$Q_g$	Total Gate Charge	$V_{DS} = 75\text{ V}, V_{GS} = 10\text{ V},$ $I_{DS} = 50\text{ A}$	-	158	-	nC
$Q_{gs}$	Gate-Source Charge		-	48	-	
$Q_{gd}$	Gate-Drain Charge		-	39	-	

Notes :

a : Pulse test ; pulse width  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2\%$





b : Guaranteed by design, not subject to production testing

## 6. Typical Characteristics

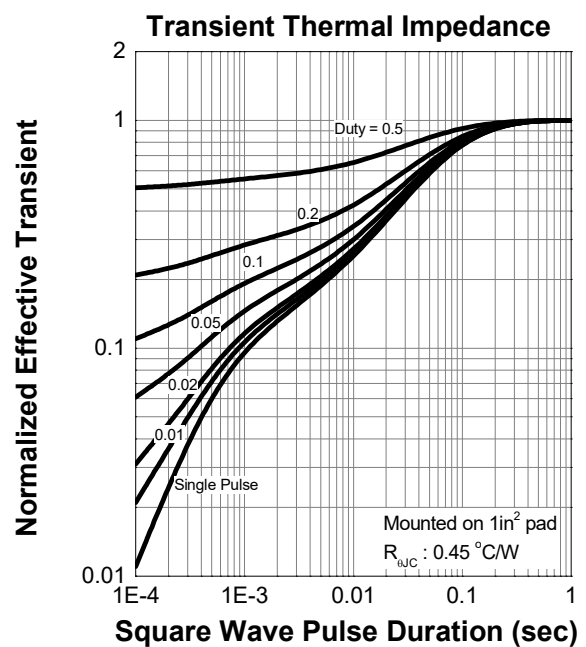
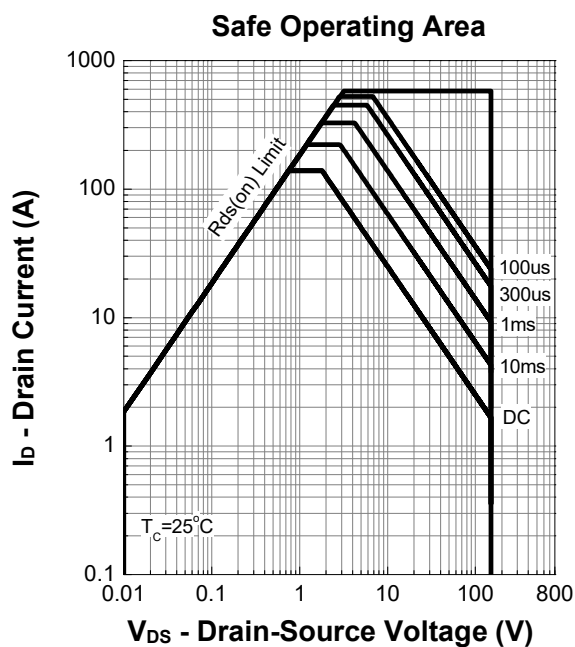
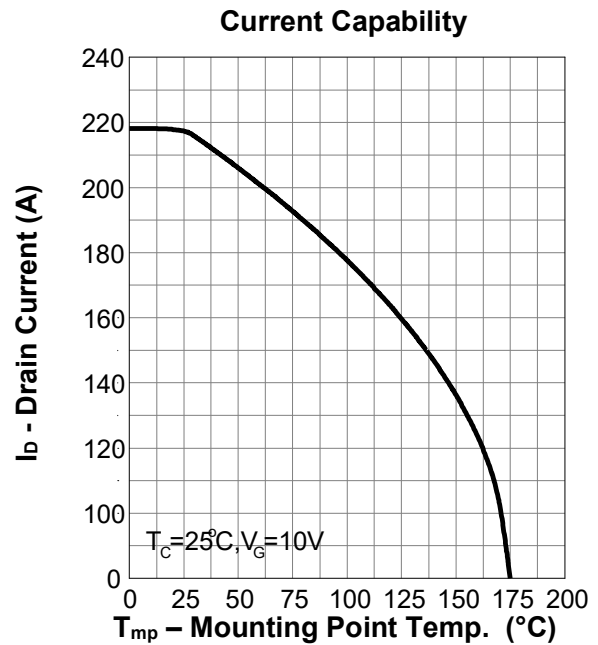
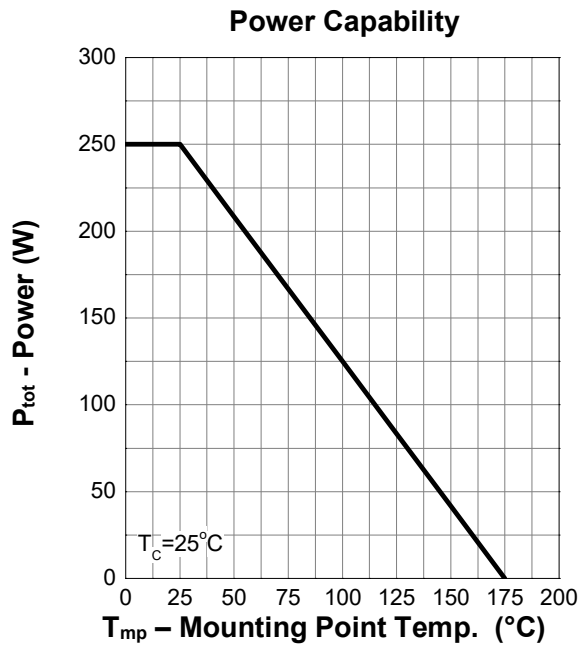




## 6. Typical Characteristics (cont.)

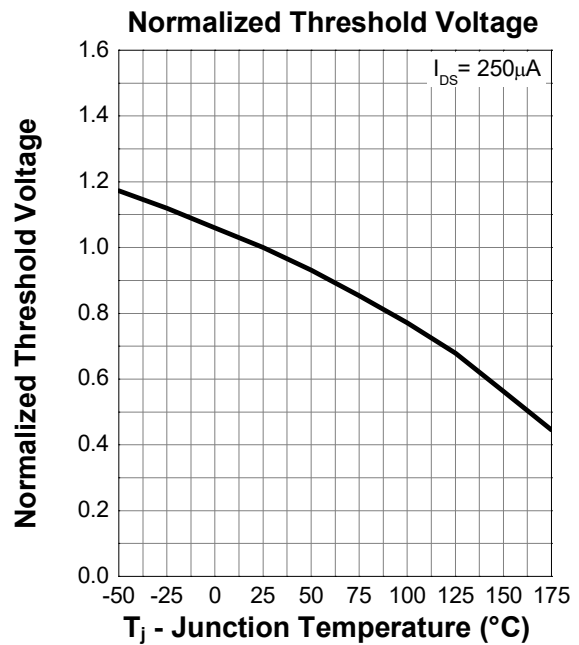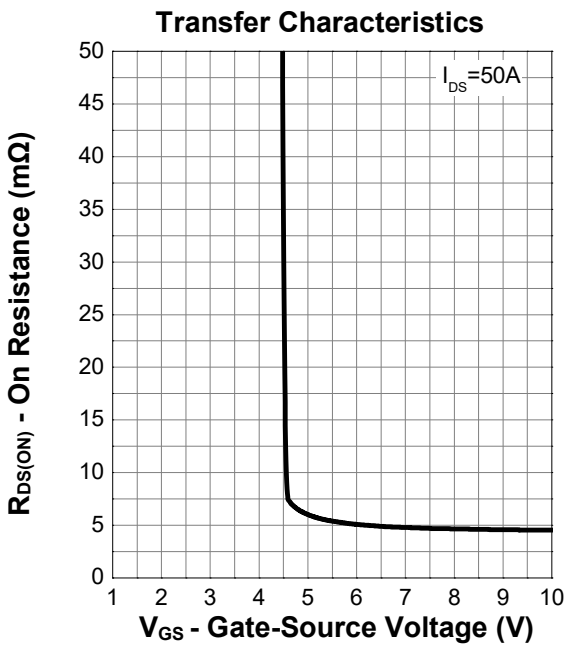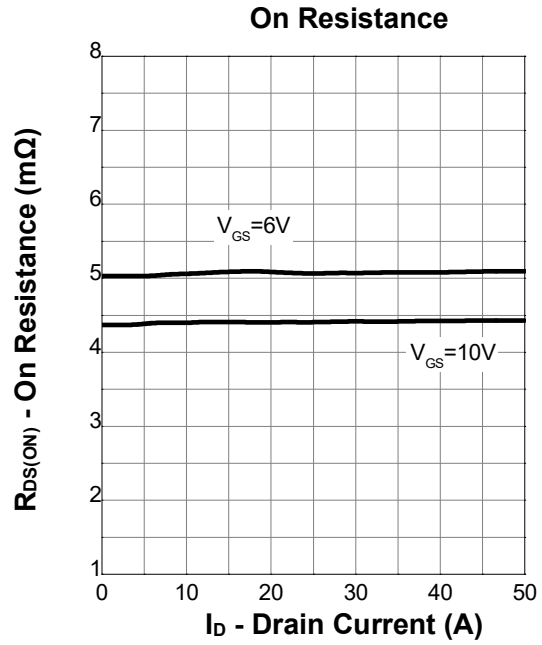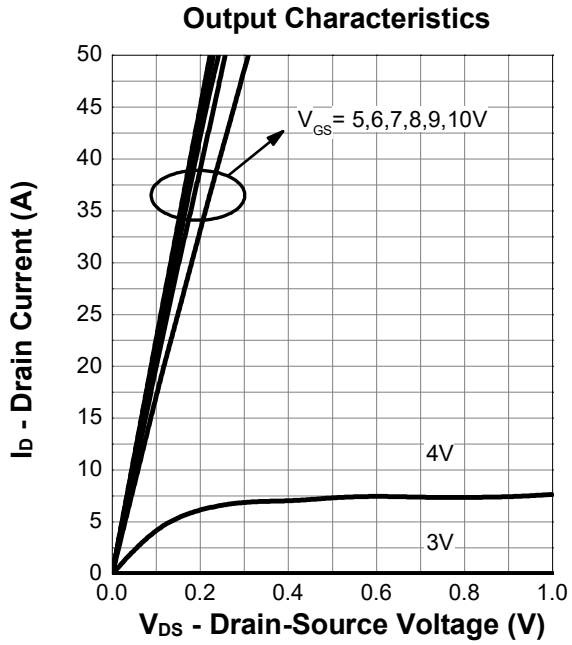


## 6. Typical Characteristics (cont.)

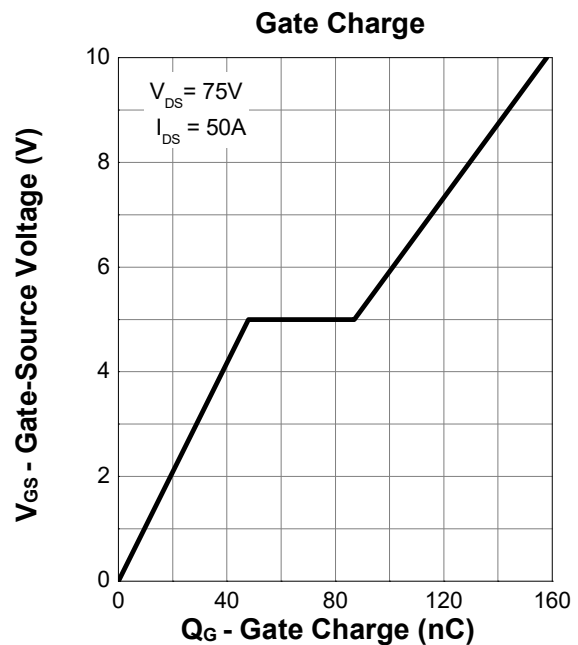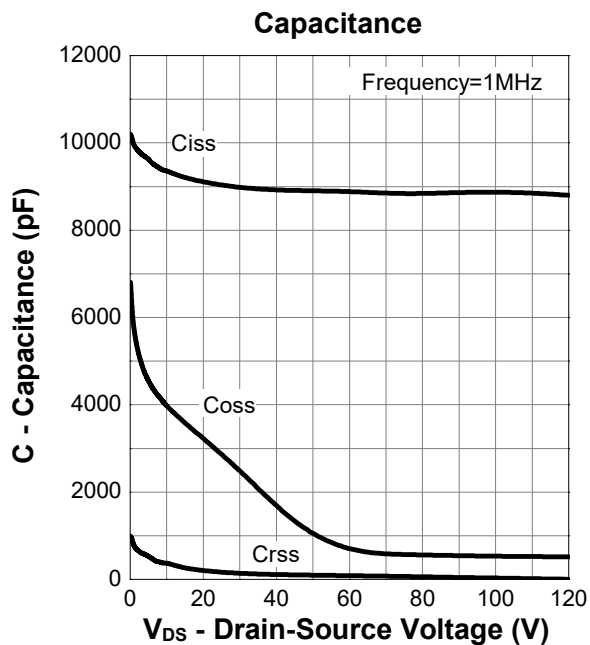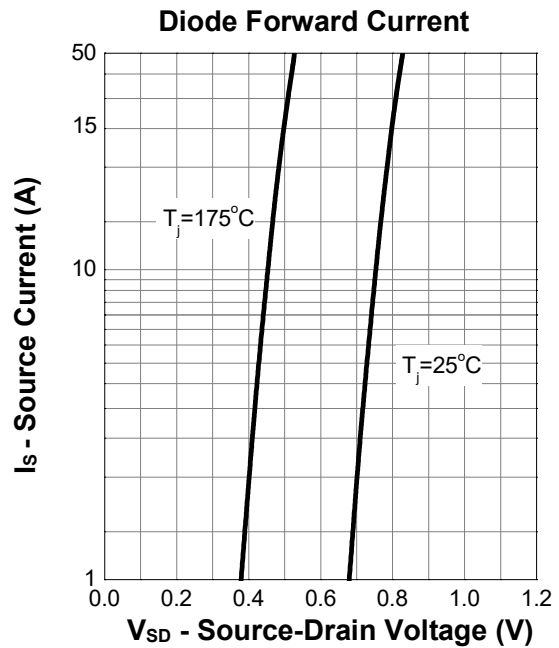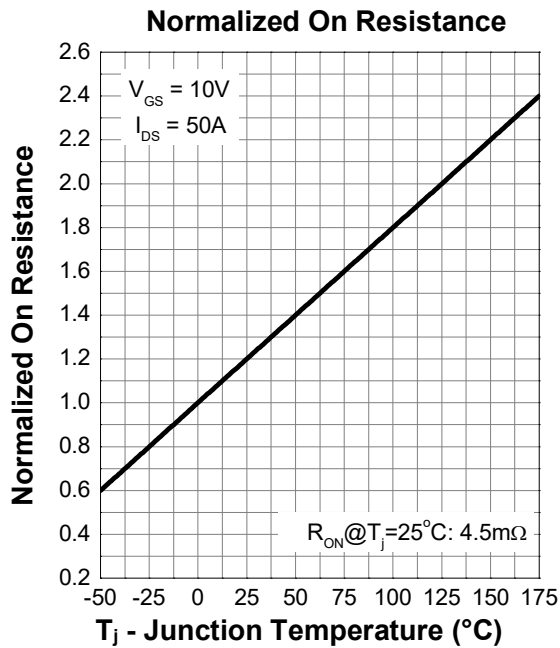

# 7. Package Dimensions

## TO-263-7L Package

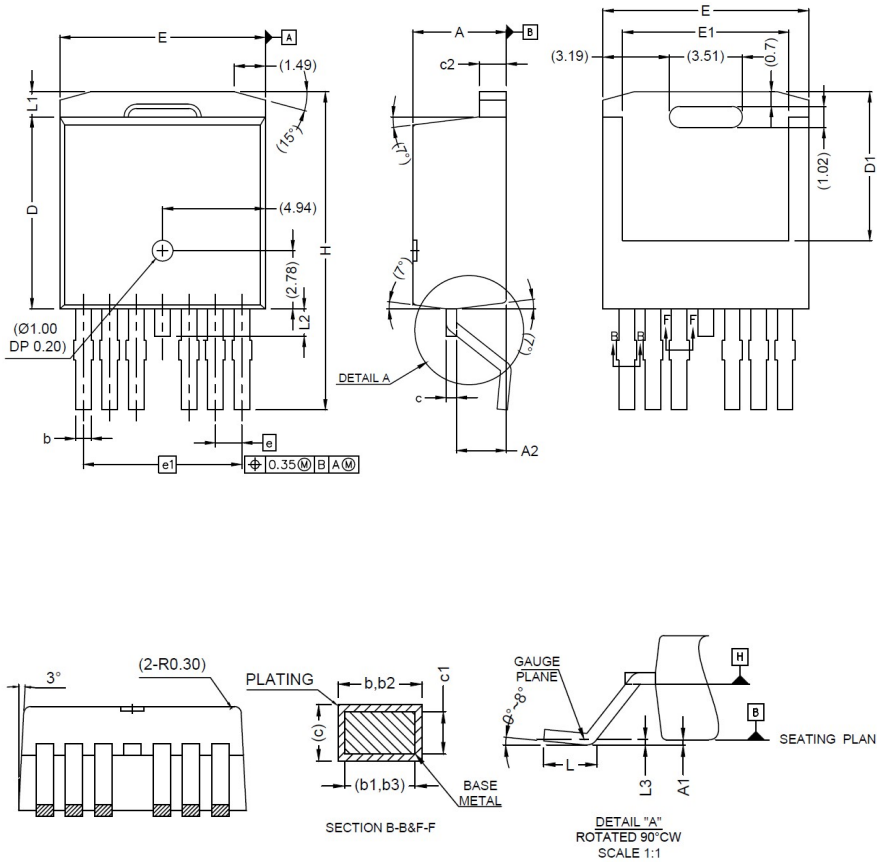

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	4.30	4.70
A1	-	0.25
A2	2.20	2.60
b	0.65	0.85
b1	0.65	0.80
b2	0.80	1.00
b3	0.80	0.95
c	0.45	0.60
c1	0.45	0.55
c2	1.25	1.40
D	9.00	9.40
D1	6.86	7.42
E	9.68	10.08
E1	7.70	8.30
e	1.27 BSC	
e1	7.62 BSC	
L	1.78	2.79
L1	-	1.60
L2	-	1.78
L3	0.25BSD	
H	14.61	15.88

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Tokmas](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)  
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)  
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)  
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)