
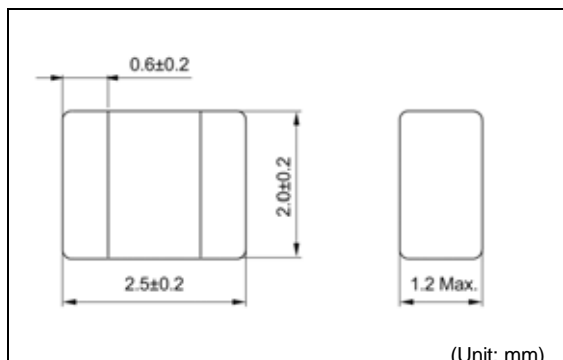
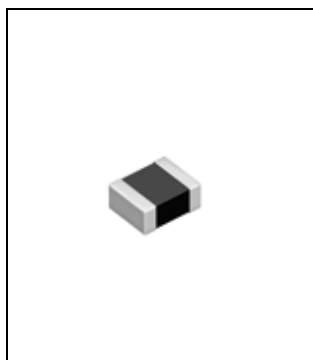


# DFE252012C

 Inductance Range: 0.47~10 $\mu$ H

**Recommended patterns**  
 推荐焊盘尺寸


(Unit: mm)

## FEATURES 特点

- Miniature size: 2520 footprint (2.5mm×2.0mm) and low profile(1.2mm Max. height)
- The use of magnetic iron powder ensure capability for large current.
- The use of Flat wire for Low DC resistance.
- Magnetically shielded, low audible core noise.
- Reflow solderable.
- Operating temperature : -40~+85°C
- Halogen Free, RoHS compliant.
- 小型薄型构造(2.5 × 2.0mm、高度1.2mm Max.)
- 使用合金系磁性粉, 保证了大电流
- 采用平角线、低直流电阻
- 闭磁路构造、低芯片噪音
- 适合回流焊接
- 工作温度范围: -40~+85°C
- 符合RoHS指令、无卤素

## TOKO STANDARD PART NUMBERS 东光标准零件号码

### TYPE DFE252012C (Quantity/reel; 3,000 PCS)

东光零件号码	电感值	公差	测试频率	最大直流电阻	最大允许直流电流	
TOKO Part Number	Inductance L( $\mu$ H)	Tolerance (%)	Test Frequency (MHz)	DC Resistance (m $\Omega$ ) Max. (Typ.)	Rated DC Current (A) Max. (Typ.)	
					$\Delta$ L/L=30%	$\Delta$ T=40°C
1239AS-H-R47M	0.47	$\pm$ 20	1	39 (29)	3.8 (4.7)	3.7 (4.4)
1239AS-H-1R0M	1.0	$\pm$ 20	1	59 (45)	3.0 (3.8)	3.0 (3.5)
1239AS-H-1R5M	1.5	$\pm$ 20	1	72 (60)	2.6 (3.3)	2.4 (2.8)
1239AS-H-2R2M	2.2	$\pm$ 20	1	108 (90)	2.2 (2.7)	2.0 (2.3)
1239AS-H-3R3M	3.3	$\pm$ 20	1	144 (120)	1.8 (2.3)	1.5 (1.7)
1239AS-H-4R7M	4.7	$\pm$ 20	1	240 (200)	1.5 (1.9)	1.3 (1.5)
1239AS-H-6R0M	6.0	$\pm$ 20	1	275 (240)	1.4 (1.7)	1.1 (1.3)
1239AS-H-6R8M	6.8	$\pm$ 20	1	375 (310)	1.3 (1.6)	1.0 (1.2)
1239AS-H-6R8M	6.8	$\pm$ 20	1	375 (310)	1.3 (1.6)	1.0 (1.2)
1239AS-H-100M	10	$\pm$ 20	1	460 (400)	1.0 (1.3)	0.85 (1.0)

- (1) Inductance is measured with a LCR meter 4284A (Agilent Technologies) or equivalent. Test frequency at 1MHz
- (2) DC resistance is measured with 34420A (Agilent Technologies) or 3541(HIOKI). (Reference ambient temperature 20°C)
- (3) Maximum allowable DC current is that which causes a 30% inductance reduction from the initial value, coil temperature to rise by 40°C whichever is smaller. (Reference ambient temperature 20°C)

- (1) LCR仪表4284A (Agilent Technologies)或者功能相同的仪器在1MHz下测试电感值。
- (2) 通过数码万用表34420A (Agilent Technologies)/ 3541(HIOKI)或者相类似的工具测试直流电阻。(环境温度为20°C)
- (3) 允许最大直流电的范围是以下两者中比较小的一个: 从开始值降低30%的电感值, 或者线圈温度升高40°C。(参考周围环境温度20°C)。

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:*

*Click to view products by [Toko](#) manufacturer:*

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)  
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)  
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)  
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)  
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)  
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)  
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)  
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)  
[CGA3E1X7R1C474K](#)